

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0894858202](#)
Status: **Active**
Description: Universal Serial Bus (USB) Shielded I/O Type A Receptacle, Single Upright, Right Angle, Terminal Length 2.50mm (.098"), Without Mylar, Gold (Au) Flash, Tube Package, Lead Free

Documents:

[3D Model](#) [Product Specification PS-89485 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
 UL E29179

General


Product Family I/O Connectors
 Series [89485](#)
 Application Wire-to-Board
 Comments Without Mylar
 Component Type Receptacle
 Product Name USB
 Type A

Physical

Boot Color N/A
 Circuits (Loaded) 4
 Circuits (maximum) 4
 Flammability 94V-0
 Gender Male
 Lock to Mating Part Yes
 Material - Plating Mating Gold
 Material - Plating Termination Tin
 Number of Rows 1
 Orientation Upright
 PC Tail Length (in) 0.098 In
 PC Tail Length (mm) 2.50 mm
 PCB Locator Yes
 PCB Retention Yes
 PCB Thickness Recommended (in) 0.062 In
 PCB Thickness Recommended (mm) 1.60 mm
 Packaging Type Tube
 Panel Mount No
 Pitch - Mating Interface (in) 0.079 In, 0.098 In
 Pitch - Mating Interface (mm) 2.00 mm, 2.50 mm
 Pitch - Term. Interface (in) 0.055 In
 Pitch - Term. Interface (mm) 1.40 mm
 Polarized to Mating Part Yes
 Polarized to PCB Yes
 Ports 1
 Surface Mount Compatible (SMC) No
 Temperature Range - Operating 125°C
 Termination Interface: Style Through Hole
 Waterproof / Dustproof No

Electrical

Current - Maximum per Contact 1A



Series

image - Reference only

EU RoHS

ELV and RoHS Compliant
REACH SVHC
 Not Reviewed
Halogen-Free Status
Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[89485Series](#)

Mates With

[88740 USB Type A Cable Plug](#)

Shield Type	Full Shield
Shielded	Yes
Voltage - Maximum	750V AC (RMS)

Solder Process Data

Lead-free Process Capability	Wave Capable (TH only)
------------------------------	------------------------


Material Info**Reference - Drawing Numbers**

Packaging Specification	PK-89485-001
Product Specification	PS-89485
Sales Drawing	SD-89485-003

This document was generated on 05/25/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

PART NO. SEE CHART
DWG. NO. SDA-90059

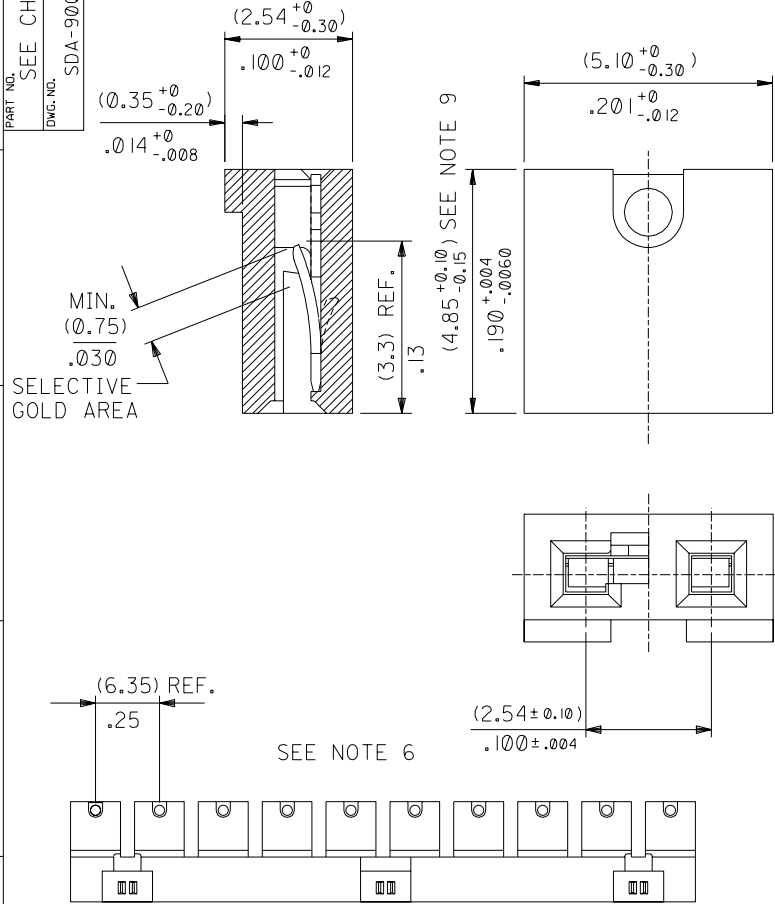

- NOTES:
- HOUSING MATERIAL: POLYESTER 30% GLASS FILLED.
 - TERMINAL MATERIAL: PHOSPHOR BRONZE.
 - THIS PART IS STACKABLE, END TO END AND SIDE BY SIDE ON (2.54)/.100 CENTRES.
 - SHUNT WILL ACCEPT (0.64)/.025 SQUARE AND ROUND PINS.
 - MAX. PROBE DIA. (0.9)/.035.
 - PARTS SUPPLIED IN STRIPS OF TEN OR AS LOOSE PIECE (SEE CHART).
 - VERSIONS 90059-0007,90059-0009 PREFERRED IN EUROPE/AMERICA.
 - VERSIONS 90059-0013,90059-0014,90059-0015 PREFERRED IN FAR EAST.
 - DIMENSION APPLIES TO MOULDED HOUSING ONLY. BREAK-OFF (5.10)/.201 MAX.

SUPPLIED AS STRIP/LOOSE	PART No	TERMINAL PLATING	HSG. COLOUR	PACKAGING INNER QTY.	PACKAGING QTY. PER BOX
⑦ STRIP	90059-0007	TIN (5u)/.0002 MIN. OVER NI (1.27u)/.00005 MIN.	BLACK	1000 pcs	20,000 pcs
LOOSE	90059-1007	TIN (5u)/.0002 MIN. OVER NI (1.27u)/.00005 MIN.	BLACK	10,000 pcs	40,000 pcs
STRIP	90059-0009	GOLD (0.38u)/.000015 MIN IN CONTACT AREA OVER NICKEL (1.27u)/.00005 IN CONTACT AREA WITH NICKEL (0.2u)/.000008 OVERALL MIN.	WHITE	1000 pcs	20,000 pcs
LOOSE	90059-1009	GOLD (0.38u)/.000015 MIN IN CONTACT AREA OVER NICKEL (1.27u)/.00005 IN CONTACT AREA WITH NICKEL (0.2u)/.000008 OVERALL MIN.	WHITE	10,000 pcs	40,000 pcs
STRIP	90059-0011	GOLD (0.38u)/.000015 MIN IN CONTACT AREA OVER NICKEL (1.27u)/.00005 IN CONTACT AREA WITH NICKEL (0.2u)/.000008 OVERALL MIN.	BLACK	1000 pcs	20,000 pcs
⑧ STRIP	90059-0012	GOLD (0.76u)/.000030 MIN IN CONTACT AREA OVER NICKEL (1.27u)/.00005 IN CONTACT AREA WITH NICKEL (0.2u)/.000008 OVERALL MIN.	WHITE	1000 pcs	20,000 pcs
⑨ STRIP	90059-0013	0.76um OF Ni UNDER 3 - 5 um OF TIN	BLACK	1000 pcs	20,000 pcs
⑧ STRIP	90059-0014	GOLD (0.1u)/.000004 MIN OVERALL OVER (1.0u)/.00004 MIN NICKEL OVERALL	WHITE	1000 pcs	20,000 pcs
STRIP	90059-0015	GOLD (1.0u)/.00004 MIN IN CONTACT AREA OVER NICKEL (0.76u)/.00003 IN CONTACT AREA WITH NICKEL (0.2u)/.000008 OVERALL MIN.	WHITE	1000 pcs	20,000 pcs
STRIP	90059-0016	GOLD (0.38u)/.000015 MIN IN CONTACT AREA OVER NICKEL (1.27u)/.00005 IN CONTACT AREA WITH NICKEL (0.2u)/.000008 OVERALL MIN.	RED	1000 pcs	20,000 pcs
LOOSE	90059-1011	GOLD (0.38u)/.000015 MIN IN CONTACT AREA OVER NICKEL (1.27u)/.00005 IN CONTACT AREA WITH NICKEL (0.2u)/.000008 OVERALL MIN.	BLACK	10,000 pcs	40,000 pcs
STRIP	90059-0017	TIN (5u)/.0002 MIN. OVER NI (1.27u)/.00005 MIN.	WHITE	1000 pcs	20,000 pcs
STRIP	90059-0018	GOLD (0.38u)/.000015 MIN IN CONTACT AREA OVER NICKEL (1.27u)/.00005 IN CONTACT AREA WITH NICKEL (0.2u)/.000008 OVERALL MIN.	BLUE	1000 pcs	20,000 pcs
STRIP	90059-0020	GOLD (0.1u)/.000004 MIN OVERALL OVER (1.0u)/.00004 MIN NICKEL OVERALL	BLACK	1000 pcs	20,000 pcs
LOOSE	90059-1020	GOLD (0.1u)/.000004 MIN OVERALL OVER (1.0u)/.00004 MIN NICKEL OVERALL	BLACK	10,000 pcs	40,000 pcs

CHANGE TIN/LEAD TO TIN. UPDATE LOOSE PKT. QTY. EC NO. E2004-0584 DRWN: M MGS 04/01/05 CHK: / / / APPR: / / /	QUALITY SYMBOLS MAJOR CRITICAL	GENERAL TOLERANCES: (UNLESS SPECIFIED)		SCALE 10:1	DESIGN UNITS <input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH	THIRD ANGLE PROJECTION	DIMENSIONS: <input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH <input type="checkbox"/> mm ONLY		SHT	REV
		4 PLACES ±0.1	±.	DRAWN BY & DATE mcc 86/04/08		TITLE: 2.54mm C-Grid Micro Shnt				
		3 PLACES ±0.05	±.	CHECKED BY & DATE dbrennan 00/07/26						
		1 PLACE ±0.10	±.	APPROVED BY & DATE mwilite 00/07/26		MOLEX INCORPORATED				
AR	REV	ANGULAR: ± 1°		CAD FILENAME	MATERIAL NO. SEE CHART	DRAWING NO. SDA-90059	SHEET NO. 1 of 2		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	