


ETM-RES05C

Resistive Type Single-touch Module

NEW

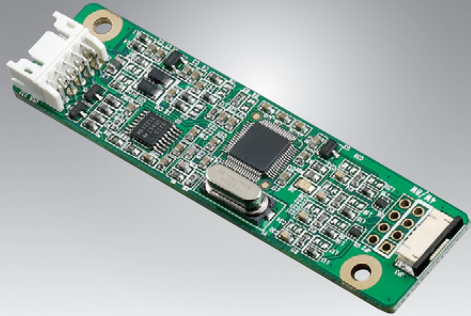

Features

- Resistive touch technology, supports 4-wire Touch Screen
- Supports USB and RS-232 Interface
- Resolution support to 2048 x 2048
- High Reliability and Fast Conversion Time

Specifications

Touch Technology	Resistive type
Host site Interface	USB: Conforms to USB 1.1 RS-232 serial: 8 data bits, 1 stop bit, No parity, and full duplex
Host site Connector	2.0 mm, 10-pin, male header for combo interface (USB and RS-232)
Communication Baud Rate	9,600 (default)
Host site Connector	2.0 mm, 10-pin, male header for combo interface (USB and RS-232)
Touch Screen Connector	4-wire: 1.0 mm, 4-pin, FFC/FPC header
Support Voltage and Current	+ 5.0 V, 100 mA
Touch Resolution	2048 x 2048, Size independent
Conversion Time	Max. 20 ms per coordinate set
Dimensions (L x W x H)	75 x 20 x 10 mm
O.S Support	Windows 2000/ XP/ Vista/ 7, WinCE 5.0/ 6.0/ 7.0, Linux,
Temperature Ranges	Operation: -25 to +8° C Storage: -25 to +85° C
Power Consumption (*)	Sleep mode (USB Suspend): < 2.5 mA Idle mode (un-touch): < 20 mA Working mode (touch): < 70 mA
Dimensions (L x W x H)	75 x 20 x 10 mm

(*) The power consumption may be different with the above if the resistance of sensor is different.

Ordering Information

Part No.	Product Description
ETM-RES05C-EEH4EE	Resistive type Touch Module, Single touch, 4-wire