

LOW DROP OR-ing POWER SCHOTTKY DIODE

MAIN PRODUCT CHARACTERISTICS


| | |
|-------------------|-----------------|
| $I_{F(AV)}$ | 2 x 60 A |
| V_{RRM} | 15 V |
| $T_j(\text{max})$ | 125 °C |
| $V_F(\text{max})$ | 0.31 V |

FEATURES AND BENEFITS

- VERY LOW DROP FORWARD VOLTAGE FOR LESS POWER DISSIPATION AND REDUCED HEATSINK
- INSULATED PACKAGE:
Insulated voltage = 2500 V_(RMS)
Capacitance = 45 pF

DESCRIPTION

Dual Schottky rectifier suited for Switched Mode Power Supplies and DC to DC power converters. Packaged in ISOTOP™, this device is especially intended for use as an OR-ing diode in fault tolerant power supply equipments.

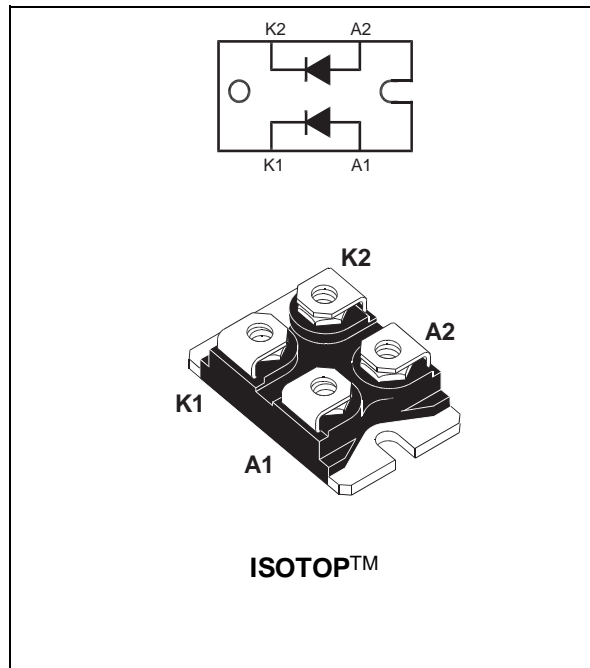

ABSOLUTE RATINGS (limiting values, per diode)

| Symbol | Parameter | | Value | Unit |
|--------------|--|--|---------------|------------------|
| V_{RRM} | Repetitive peak reverse voltage | | 15 | V |
| $I_{F(RMS)}$ | RMS forward current | | 160 | A |
| $I_{F(AV)}$ | Average forward current | $T_c = 115^\circ\text{C}$ $\delta = 1$ | 60 | A |
| I_{FSM} | Surge non repetitive forward current | $t_p = 10 \text{ ms}$ Sinusoidal | 1200 | A |
| I_{RRM} | Repetitive peak reverse current | $t_p = 2 \mu\text{s}$ $F = 1 \text{ kHz}$ | 2 | A |
| T_{stg} | Storage temperature range | | - 65 to + 150 | °C |
| T_j | Maximum operating junction temperature | | 125 | °C |
| dV/dt | Critical rate of rise of reverse voltage | | 10000 | V/ μs |

* : $\frac{dP_{tot}}{dT_j} < \frac{1}{R_{th(j-a)}}$ thermal runaway condition for a diode on its own heatsink

STPS120L15TV

THERMAL RESISTANCES

| Symbol | Parameter | | Value | Unit |
|---------------|------------------|-----------|-------|-----------------------------|
| $R_{th(j-c)}$ | Junction to case | Per diode | 0.45 | $^{\circ}\text{C}/\text{W}$ |
| | | Total | 0.28 | |
| $R_{th(c)}$ | | Coupling | 0.1 | |

STATIC ELECTRICAL CHARACTERISTICS (per diode)

| Symbol | Parameter | Tests conditions | | Min. | Typ. | Max. | Unit |
|---------|-------------------------|-----------------------------|--------------------|------|------|------|------|
| I_R^* | Reverse leakage current | $T_j = 100^{\circ}\text{C}$ | $V_R = 5\text{V}$ | | 450 | | mA |
| | | $T_j = 25^{\circ}\text{C}$ | $V_R = 12\text{V}$ | | | 22 | mA |
| | | $T_j = 100^{\circ}\text{C}$ | | | 0.7 | 2.2 | A |
| V_F^* | Forward voltage drop | $T_j = 25^{\circ}\text{C}$ | $I_F = 60\text{A}$ | | | 0.43 | V |
| | | $T_j = 125^{\circ}\text{C}$ | $I_F = 60\text{A}$ | | 0.27 | 0.31 | |

Pulse test : * $t_p = 380\ \mu\text{s}$, $\delta < 2\%$

To evaluate the conduction losses use the following equation :

$$P = 0.18 \times I_{F(AV)} + 2.2 \cdot 10^{-3} \times I_{F(RMS)}^2$$

Fig. 1: Average forward power dissipation versus average forward current (per diode).

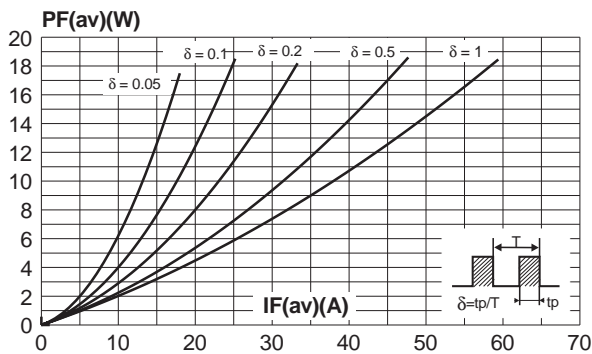


Fig. 2: Average forward current versus ambient temperature ($\delta = 1$) (per diode).

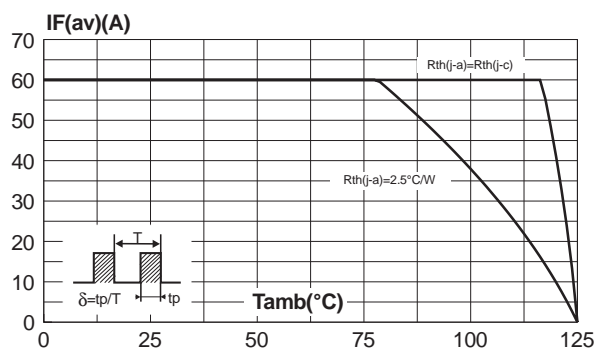


Fig. 3: Non repetitive surge peak forward current versus overload duration (maximum values per diode).

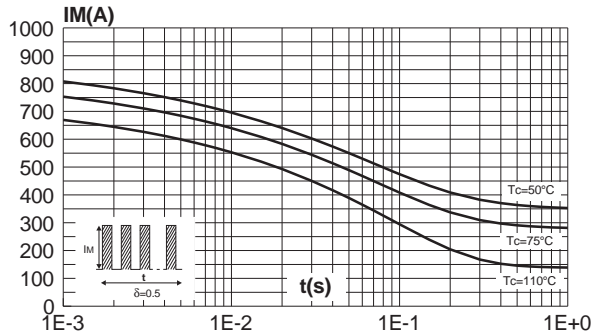


Fig. 4: Relative variation of thermal impedance junction to case versus pulse duration.

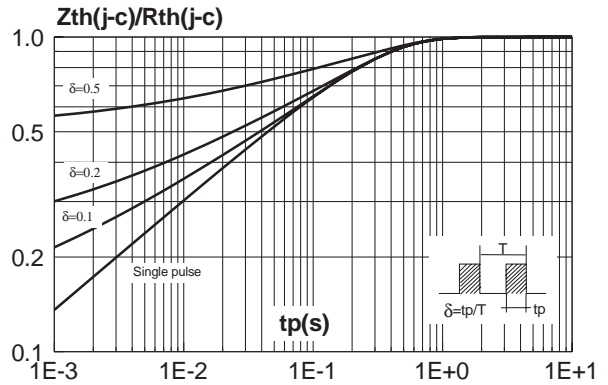


Fig. 5: Reverse leakage current versus reverse voltage applied (typical values per diode).

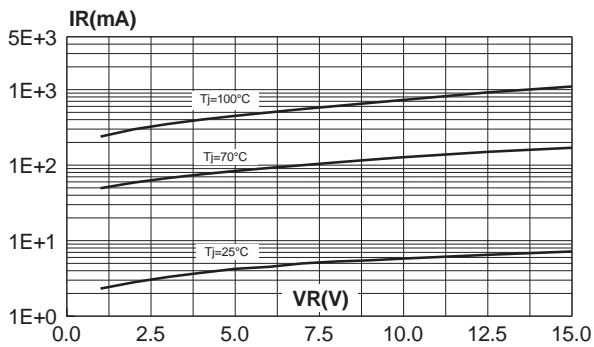


Fig. 6: Junction capacitance versus reverse voltage applied (typical values per diode).


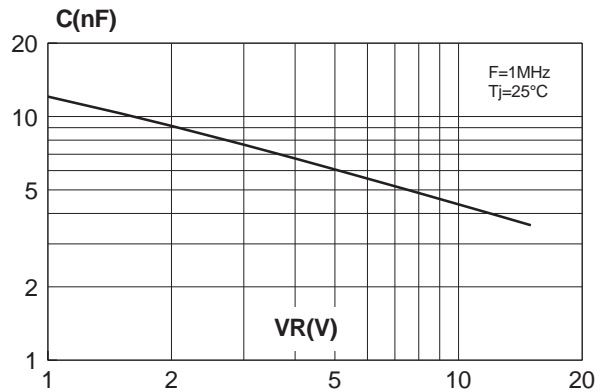


Fig. 7: Forward voltage drop versus forward current (maximum values per diode).

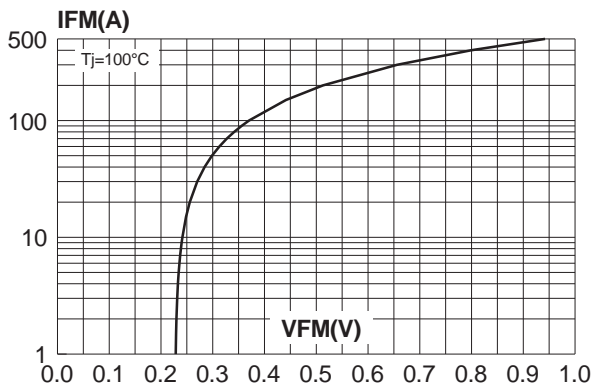

STPS120L15TV

PACKAGE MECHANICAL DATA ISOTOP

| REF. | DIMENSIONS | | | |
|------|-------------|-------|------------|-------|
| | Millimeters | | Inches | |
| | Min. | Max. | Min. | Max. |
| A | 11.80 | 12.20 | 0.465 | 0.480 |
| A1 | 8.90 | 9.10 | 0.350 | 0.358 |
| B | 7.8 | 8.20 | 0.307 | 0.323 |
| C | 0.75 | 0.85 | 0.030 | 0.033 |
| C2 | 1.95 | 2.05 | 0.077 | 0.081 |
| D | 37.80 | 38.20 | 1.488 | 1.504 |
| D1 | 31.50 | 31.70 | 1.240 | 1.248 |
| E | 25.15 | 25.50 | 0.990 | 1.004 |
| E1 | 23.85 | 24.15 | 0.939 | 0.951 |
| E2 | 24.80 typ. | | 0.976 typ. | |
| G | 14.90 | 15.10 | 0.587 | 0.594 |
| G1 | 12.60 | 12.80 | 0.496 | 0.504 |
| G2 | 3.50 | 4.30 | 0.138 | 0.169 |
| F | 4.10 | 4.30 | 0.161 | 0.169 |
| F1 | 4.60 | 5.00 | 0.181 | 0.197 |
| P | 4.00 | 4.30 | 0.157 | 0.69 |
| P1 | 4.00 | 4.40 | 0.157 | 0.173 |
| S | 30.10 | 30.30 | 1.185 | 1.193 |

| Ordering type | Marking | Package | Weight | Base qty | Delivery mode |
|---------------|--------------|---------|-------------------------|----------|---------------|
| STPS120L15TV | STPS120L15TV | ISOTOP | 28g (without screws) | 10 | Tube |

- Cooling method: by conduction (C)
- Recommended torque value : 1.3 N.m.
- Maximum torque value: 1.5 N.m.
- Epoxy meets UL94,V0

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 1999 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia
Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>