



VD-7028

VDSL FILTER  
P/N: VD-7028 DATA SHEET

Feature




- Design to meet,UL94v-0.
- Operating Temperature: -10°C to+60°C.
- Storage temperature: -25°C to +75°C.

Electrical Specifications @ 25°C

Description	Passband Frequency	Insertion loss (dB Max)	Stopband Frequency	Attn. (dB min)	Impedance
		4.5MHz ~7.9MHz		4.5MHz ~7.9MHz	
HPF	4.5MHz ~7.9MHz	-2.2	900KHz ~ 3MHz	-15	40 Ω

Mechanical

PIN	ALOCALTION
1	LINE
2	LINE
9	TX +
10	TX -
3,4,5,6,7,8	NC
11,12,13,14,15,16	NC

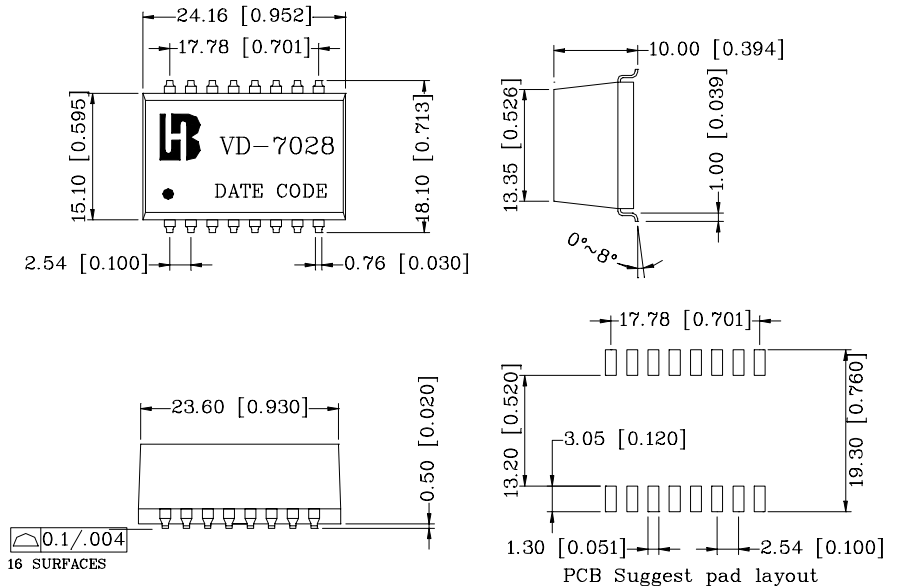

Units: mm[Inches] Tolerances: xx.x0±0.25[0.010]  
0.xx±[0.002]