


# 15 PIN D-SUB CONNECTOR FEMALE


## R/A TYPE LOW PROFILE

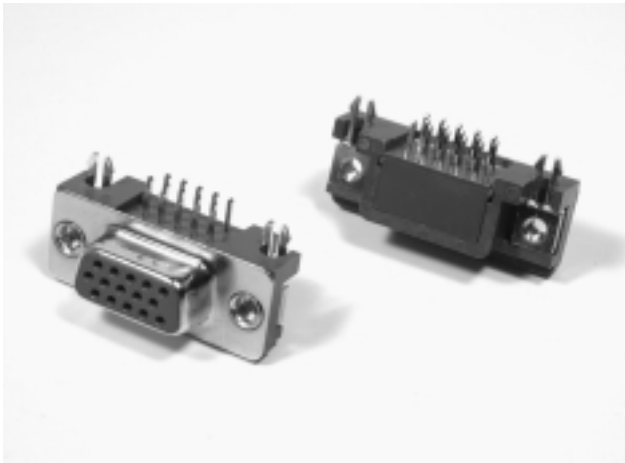

### 070207FR Series

#### Specifications:

- **Insulator material** : P.B.T+30% Fiber UL 94V-0
- **Operating Type Range** : -40°C TO +105°C
- **Terminal Material** : Brass
- **Platings** : Gold Plated or Selective Gold/Tin Over Nickel
- **Max. Current Rating** : 2.5A
- **Max. Voltage Rating** : 250V AC
- **Dielectric Strength** : 500V AC For 60 Seconds

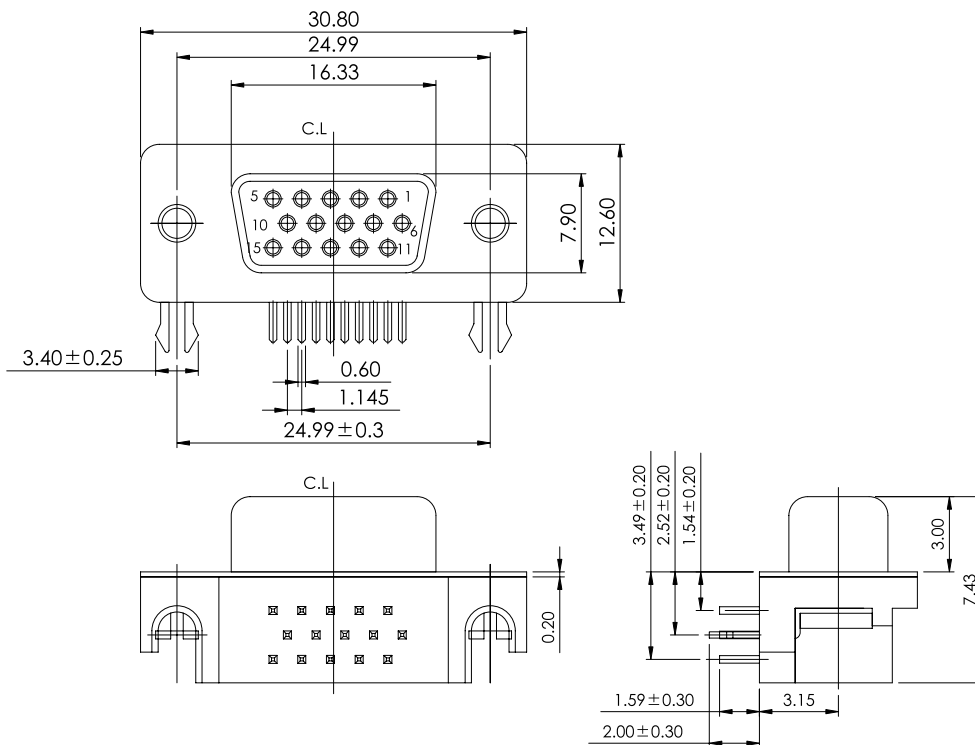

Desk  
Top

### Order Information

070207FR015□□18□A  
 1 2 3 4 5

1. 'R' : Right Angle DIP Type
  2. No. of Pins
  3. Plating
  4. Color 'Z' : Black  
'C' : Blue
  5. Package  
'A' : Tray Package Without Cap
- Reference Page 11

### Recommended P.C.B Layout

