

# HALF PITCH ULTRA THIN D-SUB

(MALE SOLDER TYPE WITH COVER)




## 127116MC Series

Mates with SUYIN 127113, 127115, Series

### Specifications:

- 26 Circuits
- Insulator material : Black High Temp. Plastic
- Cover Material : ABS
- Latch Material : Stainless steel
- Operating Temp. Range : -40°C to +105°C
- Terminal Material : Phosphor Bronze
- Plating : Selective Plated (Gold/Tin)  
: Metal shell-Nickel Plated
- Max. Current Rating : 0.5A
- Voltage Rating : 150V AC
- Dielectric Strength : 500V (Min. 60 Seconds)

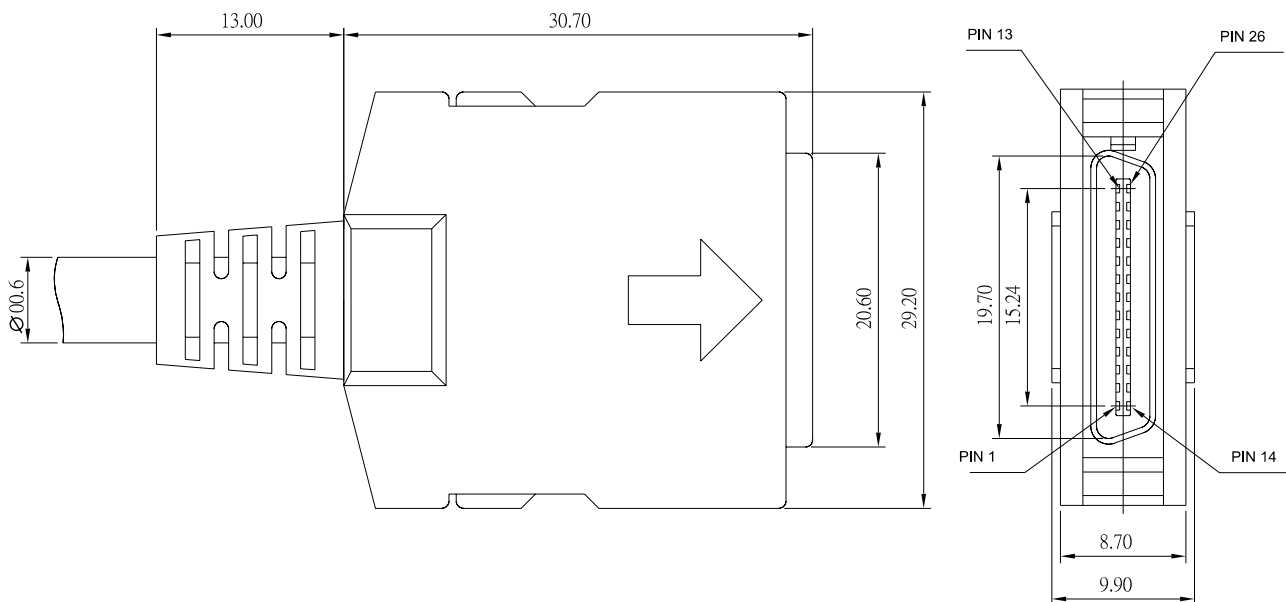

## Order Information

127116MC026S500ZO  
1 2 3 4 5

1. 'C' : Crimp Pin
2. No. of Pins
3. Plating  
'S5' : 30u" selctive gold in contact area  
/min. 100u"tin solder area
4. Color 'Z' : BLACK
5. Package  
'O' : Sim Box Without Cap

Reference Page 11