


SOT-363


Dimensions in inches and (millimeters)

Features

- ✧ Fast switching speed.
- ✧ For general purpose switching application.
- ✧ Ultra-small surface mount package.
- ✧ High conductance.
- ✧ Two "BAV70" circuits in one package.

Applications

- ✧ For general purpose switching application.

Ordering Information

Type No.	Marking	Package Code
BAV70DW	KJA	SOT-363

MAXIMUM RATING @ Ta=25°C unless otherwise specified

Symbol	Characteristic	Value	Unit	
V_{RRM}	Peak repetitive reverse voltage	75	V	
V_{RWM}	Working peak reverse voltage			
V_R	DC reverse voltage			
$V_{R(RMS)}$	RMS Reverse voltage	53	V	
I_{FM}	Forward continuous current	300	mA	
I_{FSM}	Non-repetitive peak forward surge current	@t=1.0μs	2.0	A
		@t=1.0s	1.0	
I_O	Average rectified output current	150	mA	
P_D	Power Dissipation	200	mW	
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	625	°C/W	
T_j, T_{stg}	Junction and Storage Temperature	-65 to +150	°C	

ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

Parameter	Symbol	Test conditions	MIN	MAX	UNIT
Reverse breakdown voltage	$V_{(BR)R}$	$I_R=100\mu A$	75	-	V
Forward voltage	V_F	$I_F=1.0mA$ $I_F=10mA$ $I_F=50mA$ $I_F=150mA$	-	0.715 0.855 1.0 1.25	V
Junction Capacitance	C_J	$V_R=0V, f=1.0MHz$	-	2.0	pF
Reverse Recovery time	t_{rr}	$I_F=I_R=10mA, I_{rr}=0.1*I_R,$ $R_L=100\Omega$	-	3.0	ns

TYPICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

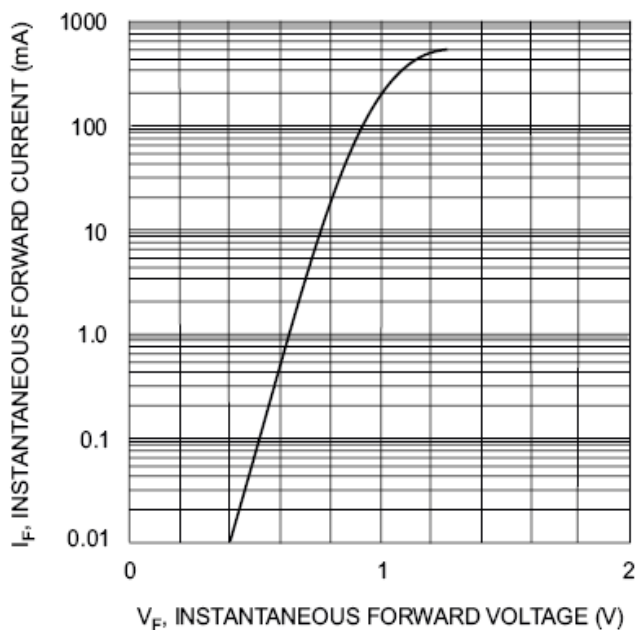


Fig. 1 Forward Characteristics

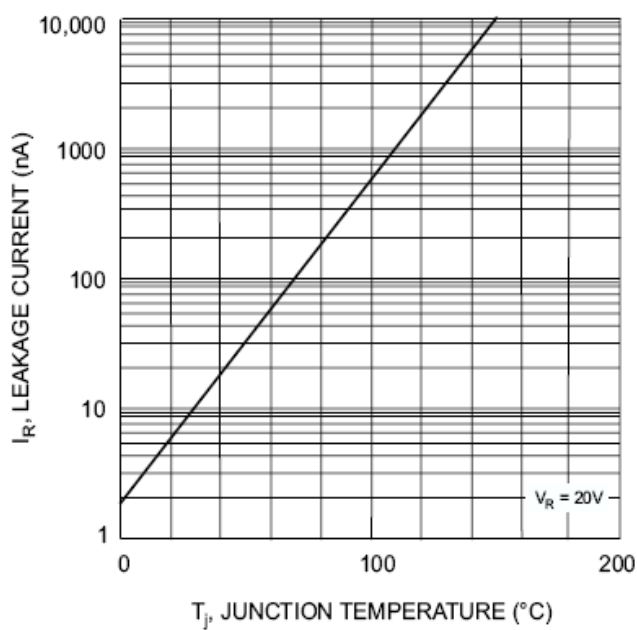


Fig. 2 Leakage Current vs Junction Temperature