

T1/CEPT/ISDN PRI INTERFACE TRANSFORMER

Reinforced Insulation Per EN 41003/EN 60950

Turns Ratio (± 5%)	1:1
----------------------	-----


Parameter	Min.	Max.	Units
Open Circuit Inductance Oscillation Voltage = 20mV Oscillation Frequency = 100.0 KHz	1.2		mH
Leakage Inductance Oscillation Level = 20mV Oscillation Frequency = 100.0 KHz		0.80	μH
Interwinding Capacitance (C _{www}) Oscillation Frequency = 100.0 KHz		30	pF
Primary DC Resistance		0.7	ohms
Secondary DC Resistance		0.7	ohms
Isolation (HI-POT)	3000		V _{RMS}

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.


Parts shipped in anti-static tubes. 31 pieces per tube

Surface mount version of this part available. Part# T-13613G

Physical Dimensions inches (mm)

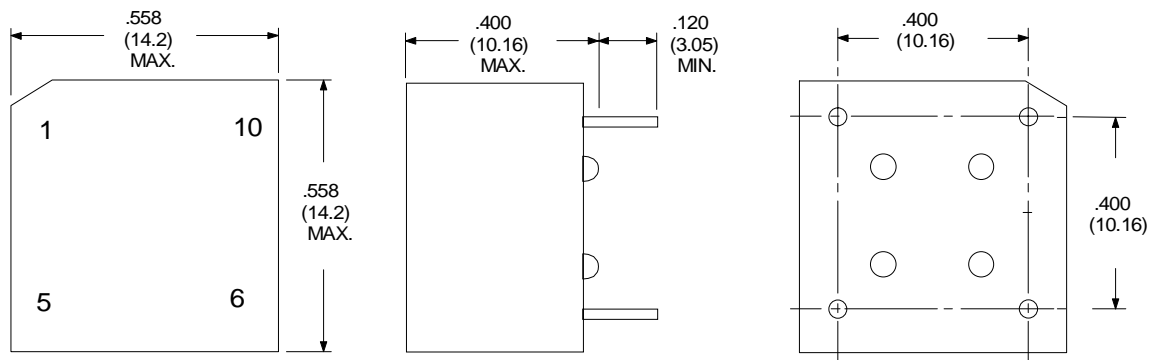

Schematic Diagram



RHOMBUS P/N: T-13613	
CUST P/N:	NAME:
DATE: 04/25/96	SHEET: 1 OF 1