


#4-40 UNC-2B
X .25 DEEP
2 PL FAR SIDE



SPECIFICATIONS

IMPEDANCE: 50 OHMS
 FREQUENCY RANGE: 2 TO 200 MHz
 NUMBER OF OUTPUT PORTS: 3
 MINIMUM ISOLATION: 20 dB
 MAXIMUM VSWR: 1.35
 MAXIMUM INSERTION LOSS: 1.00 dB

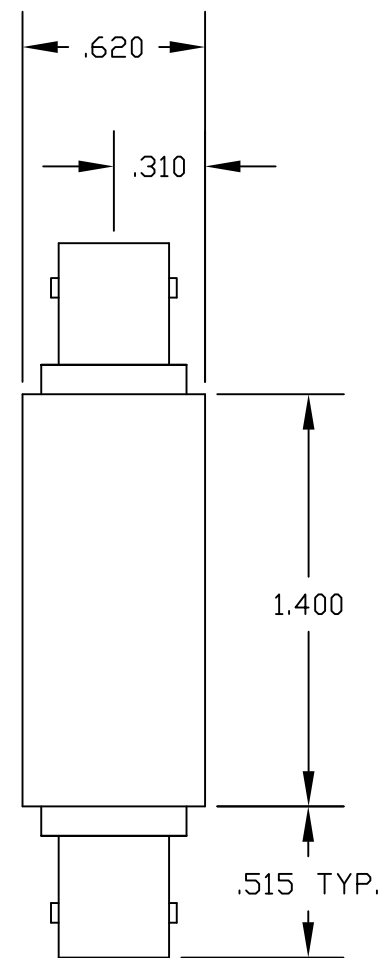

PASTERNAK ENTERPRISES, INC.
 P.O BOX 16759, IRVINE, CA 92623
 PHONE (949) 261-1920 FAX (949) 261-7451
 WEB ADDRESS: www.pasternack.com
 E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

DWG TITLE
PE2007

DES. BNC FEMALE POWER DIVIDER FREQUENCY
 RANGE: 2-200 MHz 3 OUTPUT PORTS

REV. A	FSCM NO. 53919	CAD FILE 092210	SCALE N/A	SIZE A	127
--------	----------------	-----------------	-----------	--------	-----

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES.