

## Fixed Frequency Synthesizer Surface Mount Module

### Applications

- Point to point transmission
- Satellite Communications
- 

### Application Notes

- AN-107: Manual Soldering Technique
- AN-205: Measuring Phase Noise for SFS Series

### Performance Specifications

|                                       | Min  | Typ      | Max  | Units              |
|---------------------------------------|------|----------|------|--------------------|
| Frequency                             | 6520 |          | 6520 | MHz                |
| Phase Noise @ 10 kHz offset (1 Hz BW) |      | -90      |      | dBc/Hz             |
| Harmonic Suppression (2nd)            |      | -20      |      | dBc                |
| Spurious Suppression                  |      | -65      |      | dBc                |
| Power Output                          | 3    | 6        | 9    | dBm                |
| Load Impedance                        |      | 50       |      | $\Omega$           |
| Settling Time                         |      | .3       |      | mS                 |
| Operating Temperature Range           | -40  |          | 80   | $^{\circ}\text{C}$ |
| Package Style                         |      | PLL-V12N |      |                    |

### Power Supply Requirements

|                                  | Min | Typ | Max | Units |
|----------------------------------|-----|-----|-----|-------|
| Supply Voltage 1: PLL (Vcc, nom) |     | 3   |     | Vdc   |
| Supply Voltage 2: VCO (Vcc, nom) |     | 5   |     | Vdc   |
| Supply Current 1: PLL (Icc, typ) |     | 11  |     | mA    |
| Supply Current 2: VCO (Icc, typ) |     | 40  |     | mA    |

### Reference Oscillator Signal

|                           | Min | Typ  | Max | Units  |
|---------------------------|-----|------|-----|--------|
| Frequency                 |     | 10   |     | MHz    |
| Phase Noise @1 kHz Offset |     | -145 |     | dBc/Hz |

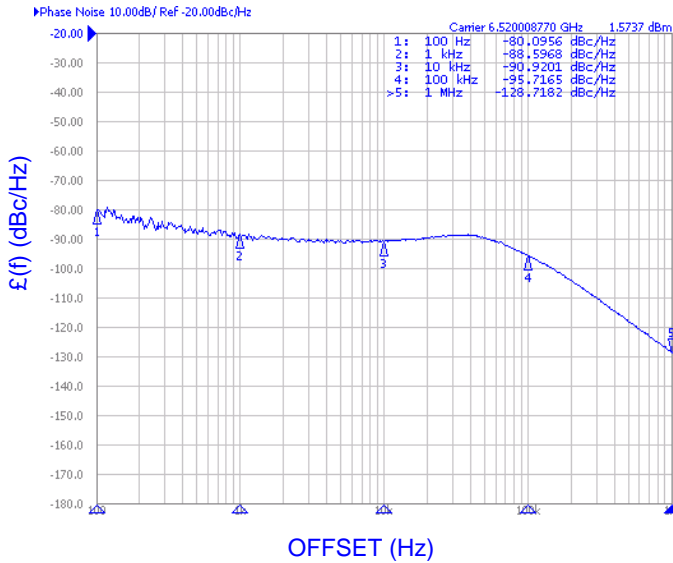
### Additional Notes

LFSuffix = RoHS Compliant. All specifications are subject to change without notice.

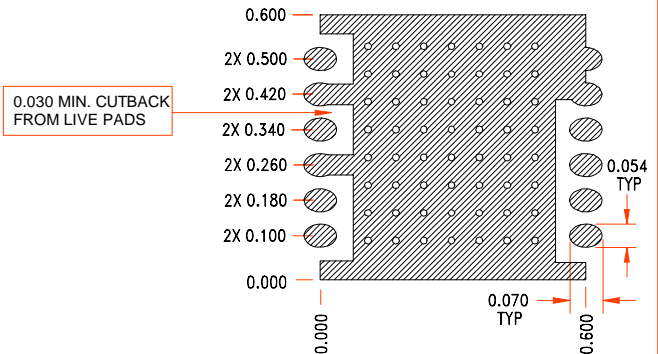
© Z-Communications, Inc. All Rights Reserved.

14118 Stowe Drive, Suite B | Poway, CA 92064 | TEL: (858) 621-2700 | FAX: (858) 486-1927




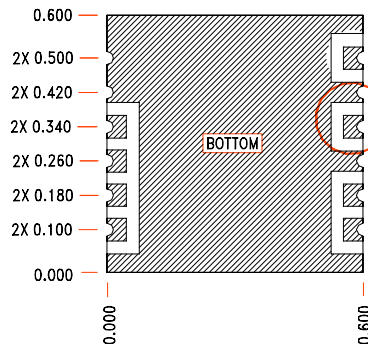
URL: [www.zcomm.com](http://www.zcomm.com) | EMAIL: [applications@zcomm.com](mailto:applications@zcomm.com)

**Phase Noise, typ.**
**Footprint**
**PHASE NOISE (1 Hz BW, typical)**

**RECOMMENDED FOOTPRINT**

SEVERAL HOLES OF  $\phi$  0.015 ON GND. PLANE ARE RECOMMENDED FOR GOOD GROUNDING.


**Physical Dimensions**

NOTE: ALL DIMENSIONS ARE IN INCHES  
TOL: XXX: +/- 0.010


**SFS PIN CONFIGURATION**

|      |            |
|------|------------|
| 1    | Vcc (VCO)  |
| 3    | RF OUT     |
| 5    | MUX OUT    |
| 6    | Vcc (CHIP) |
| 8    | N/C        |
| 10   | REF IN     |
| REST | GROUND     |

**PVA PIN CONFIGURATION**

|      |            |
|------|------------|
| 1    | Vcc (VCO)  |
| 3    | RF OUT     |
| 5    | MUX OUT    |
| 6    | Vcc (CHIP) |
| 7    | CLOCK      |
| 8    | DATA       |
| 9    | ENABLE     |
| 10   | REF IN     |
| REST | GROUND     |