

Slug Inductors

High Current Per Volume

Designed for Noise, Spike & Filtering applications.

Electrical Specifications at 25°C


Part Number	L Nom. (μH)	DCR Nom. (mΩ)	I Max. (A)
L-500	10	7.1	14.0

Applications

- Power Supplies
- Filters
- SCR and Triac Controls
- OEM Equipment
- Telephones
- TV, CRT'S, VCR'S
- Appliances

Coils finished with UL rated varnish.
 Variations on electrical parameters of parts listed are available - Please contact factory.


Physical Dimensions inches (mm)

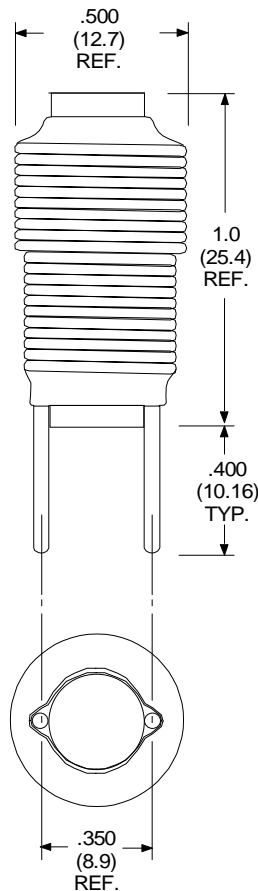

Height dimensions are without solder joint or coatings

LEADS ARE #16 AWG

Schematic Diagram



RHOMBUS P/N: L-500	
CUST P/N:	NAME:
DATE: 8/3/99	SHEET: 1 OF 1