



3-Terminal 1A Positive Voltage Regulator


LM7915

GENERAL DESCRIPTION

The LM7915 series of three terminal positive regulators are available in the TO-220 package and with several fixed output voltages, making them useful in a wide range of applications. Each type employs internal current limiting, thermal shut down and safe operating area protection, making it essentially indestructible. If adequate heat sinking is provided, they can deliver over 1A output current. Although designed primarily as fixed voltage regulators, these devices can be used with external components to obtain adjustable voltages and currents.

ABSOLUTE MAXIMUM RATINGS (Ta = 25 °C)

Parameter	Symbol	Typ	Unit
Input Voltage	V _I	-35	V
Output Voltage	V _O	-15	V
Peak Current	I _{PK}	-2.2	A
Operating Temperature Range	T _{OPR}	0~125	°C
Storage Temperature Range	T _{STG}	-65~150	°C

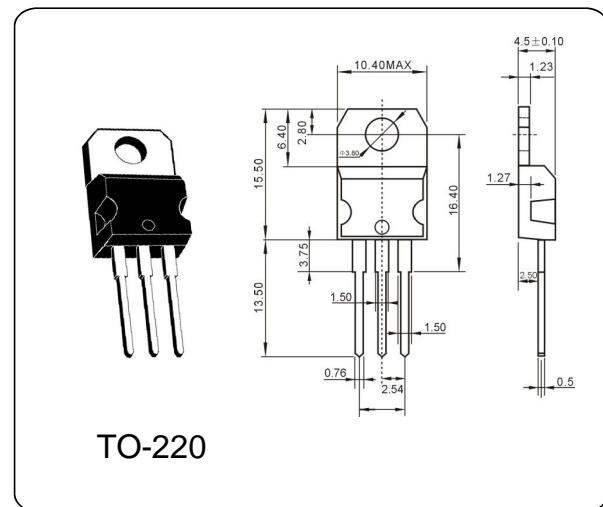

ELECTRICAL CHARACTERISTICS (Ta = 25 °C)

(Refer to test circuit, I_O = -500mA, V_I = -23V, C_i = 2.2μF, C_o = 1.0μF unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage	V _O	V _I = -18V to -30V	-14.55	-15	-15.45	V
Line Regulation (Note1)	Regline	V _I = -17.5V to -30V		-12	-300	mV
		V _I = -20V to -26V		-6.0	-150	
Load Regulation (Note1)	Regload	I _O = -5.0mA to -1.5A		-12	-300	mV
		I _O = -250mA to -750mA		-4	-150	
Quiescent Current	I _Q	T _J = +25 °C		-3	-6	mA
Quiescent Current Change	I _Q	I _O = -5mA to -1A			-0.5	mA
		V _I = -18.5V to -30V			-1.0	
Ripple Rejection	RR	f = 120Hz, V _O = -18V to -28V	54	60		dB
Dropout Voltage	V _{Drop}	I _O = -1A, T _J = +25 °C		-2		V
Short Circuit Current	I _{SC}	V _I = -35V, T _A = +25 °C		-300		mA
Peak Current	I _{PK}	T _J = +25 °C		-2.2		A