



**CHENMKO ENTERPRISE CO.,LTD**

**SURFACE MOUNT**

**Dual N-Channel Enhancement Mode Field Effect Transistor**

**VOLTAGE 30 Volts CURRENT 9 Ampere**

**CHM3128JPT**

*Lead free devices*

#### APPLICATION

- \* Servo motor control.
- \* Power MOSFET gate drivers.
- \* Other switching applications.



#### FEATURE

- \* Small flat package. (SO-8 )
- \* High density cell design for extremely low R<sub>DS(ON)</sub>.
- \* Rugged and reliable.
- \* High saturation current capability.


#### CONSTRUCTION

- \* N-Channel Enhancement

#### CIRCUIT

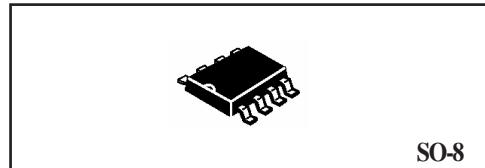

**SO-8**

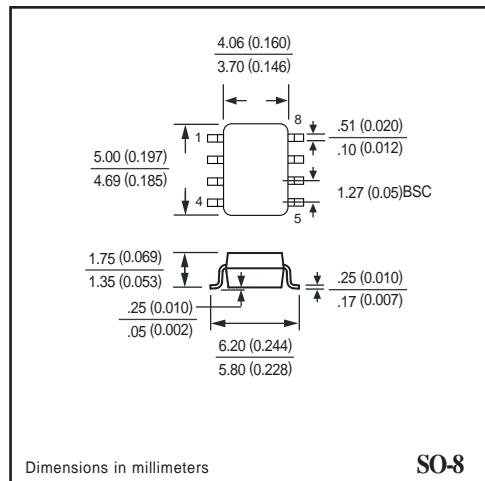

Dimensions in millimeters

**SO-8**

#### Absolute Maximum Ratings

T<sub>A</sub> = 25°C unless otherwise noted

Symbol	Parameter	CHM3128JPT	Units
V <sub>DSS</sub>	Drain-Source Voltage	30	V
V <sub>GSS</sub>	Gate-Source Voltage	±20	V
I <sub>D</sub>	Maximum Drain Current - Continuous	9	A
	- Pulsed (Note 3)	36	
P <sub>D</sub>	Maximum Power Dissipation	2500	mW
T <sub>J</sub>	Operating Temperature Range	-55 to 150	°C
T <sub>STG</sub>	Storage Temperature Range	-55 to 150	°C

Note : 1. Surface Mounted on FR4 Board , t <=10sec

2. Pulse Test , Pulse width <= 300us , Duty Cycle <= 2%

3. Repetitive Rating , Pulse width limited by maximum junction temperature

4. Guaranteed by design , not subject to production testing

#### Thermal characteristics

R <sub>θJA</sub>	Thermal Resistance, Junction-to-Ambient (Note 1)	62.5	°C/W
------------------	--	------	------

2007-11

## RATING CHARACTERISTIC CURVES ( CHM3128JPT )

**Electrical Characteristics**  $T_A = 25^\circ\text{C}$  unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Units
--------	-----------	------------	-----	-----	-----	-------

### OFF CHARACTERISTICS

$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{\text{GS}} = 0 \text{ V}, I_D = 250 \mu\text{A}$	30			V
$I_{\text{DS}}^{\text{SS}}$	Zero Gate Voltage Drain Current	$V_{\text{DS}} = 30 \text{ V}, V_{\text{GS}} = 0 \text{ V}$			1	$\mu\text{A}$
$I_{\text{GSSF}}$	Gate-Body Leakage	$V_{\text{GS}} = 20 \text{ V}, V_{\text{DS}} = 0 \text{ V}$			+100	nA
$I_{\text{GSSR}}$	Gate-Body Leakage	$V_{\text{GS}} = -20 \text{ V}, V_{\text{DS}} = 0 \text{ V}$			-100	nA

### ON CHARACTERISTICS (Note 2)

$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$V_{\text{DS}} = V_{\text{GS}}, I_D = 250 \mu\text{A}$	1		3	V
$R_{\text{DS}(\text{ON})}$	Static Drain-Source On-Resistance	$V_{\text{GS}} = 10 \text{ V}, I_D = 9 \text{ A}$		13	16	$\text{m}\Omega$
		$V_{\text{GS}} = 4.5 \text{ V}, I_D = 7.2 \text{ A}$		18	23	

### Dynamic Characteristics

$C_{\text{iss}}$	Input Capacitance	$V_{\text{DS}} = 15 \text{ V}, V_{\text{GS}} = 0 \text{ V}, f = 1.0 \text{ MHz}$		950		pF
$C_{\text{oss}}$	Output Capacitance			165		
$C_{\text{rss}}$	Reverse Transfer Capacitance			85		

### SWITCHING CHARACTERISTICS (Note 4)

$Q_g$	Total Gate Charge	$V_{\text{DS}} = 15 \text{ V}, I_D = 9 \text{ A}$ $V_{\text{GS}} = 10 \text{ V}$		14.8	19.7	nC
$Q_{\text{gs}}$	Gate-Source Charge			2.9		
$Q_{\text{gd}}$	Gate-Drain Charge			1.8		
$t_{\text{on}}$	Turn-On Time	$V_{\text{DD}} = 15 \text{ V}$ $I_D = 9 \text{ A}, V_{\text{GS}} = 10 \text{ V}$ $R_{\text{GEN}} = 0.3 \Omega$		12	24	nS
$t_r$	Rise Time			3.5	7	
$t_{\text{off}}$	Turn-Off Time			32	64	
$t_f$	Fall Time			6.7	12.4	


### DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS

$I_s$	Drain-Source Diode Forward Current	(Note 1)			9	A
$V_{\text{SD}}$	Drain-Source Diode Forward Voltage	$I_s = 9 \text{ A}, V_{\text{GS}} = 0 \text{ V}$	(Note 2)		1.3	V


## RATING CHARACTERISTIC CURVES ( CHM3128JPT )

### Typical Electrical Characteristics


**Figure 1. Output Characteristics**

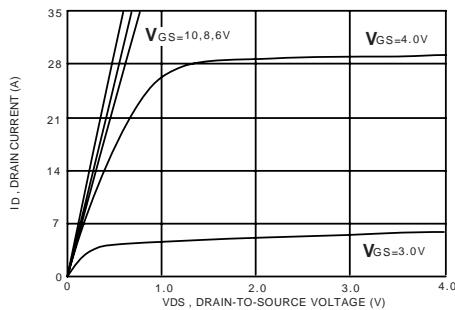


**Figure 2. Transfer Characteristics**

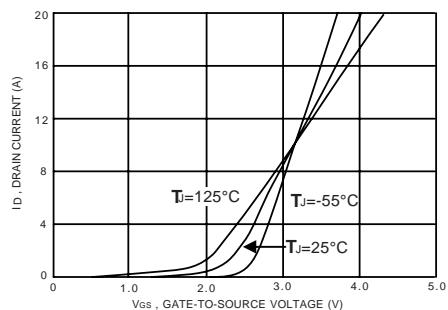

**Figure 3. Gate Charge**

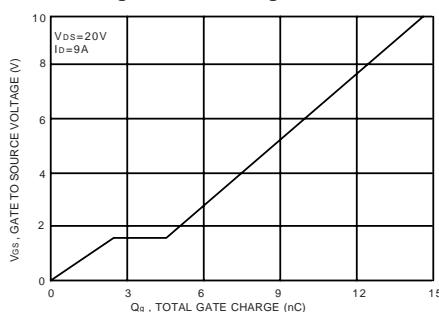

**Figure 4. On-Resistance Variation with Temperature**

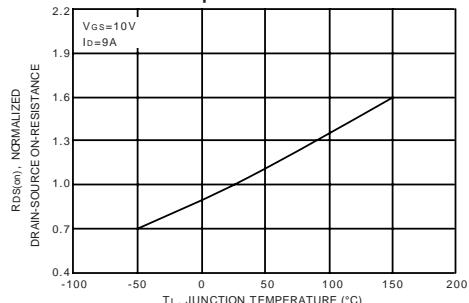

**Figure 5. Gate Threshold Variation with Temperature**

