

P-tec Corp. Tel:(866) 695-4162
 2405 Commerce Circle Tel:(719) 589 3122
 Alamosa CO 81101 Fax:(719) 589 3592
 www.p-tec.net sales@p-tec.net



PL00131 Series SMD LED 0603 Package

Features

- *Flat Lens Thin Package 1.6 x 0.8 x 0.6mm
- *Low Current Requirements
- *High Light Output
- *Compatible with IR Solder-Process
- *Industry Standard Footprint
- *4000 pcs per Reel
- *RoHS Compliant


Absolute Maximum Ratings at T_A = 25°C

| | |
|---|----------------------|
| Power Dissipation | 78mW |
| Reverse Voltage (<10μA) | 5.0V |
| Max Forward Current | 20mA |
| Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width) | 100mA |
| Operating Temperature Range | -40°C to +85°C |
| Storage Temperature Range | -40°C to +85°C |
| Reflow Soldering Temperature..... | 260°C for 10 seconds |

Electrical & Optical Characteristics at T_A = 25°C

| Part Number | Emitting Color | Chip Material | Dominant Wave Length | Peak Wave Length | Viewing Angle 2θ ½ | Forward Voltage @20mA (V) | | Luminous Intensity @20mA (mcd) | |
|------------------|-------------------------|---------------|----------------------|------------------|--------------------|---------------------------|-----|--------------------------------|------|
| | | | | | | Typ | Max | Min | Typ |
| Water Clear Lens | | | nm | nm | Deg | Typ | Max | Min | Typ |
| PL00131-WCR18 | Super bright Orange-Red | AlInGaP | 632 | 645 | 130° | 2.1 | 2.6 | 45.0 | 72.0 |

Package Dimensions are in **Millimeters**. Tolerance is ± 0.1mm unless otherwise specified.

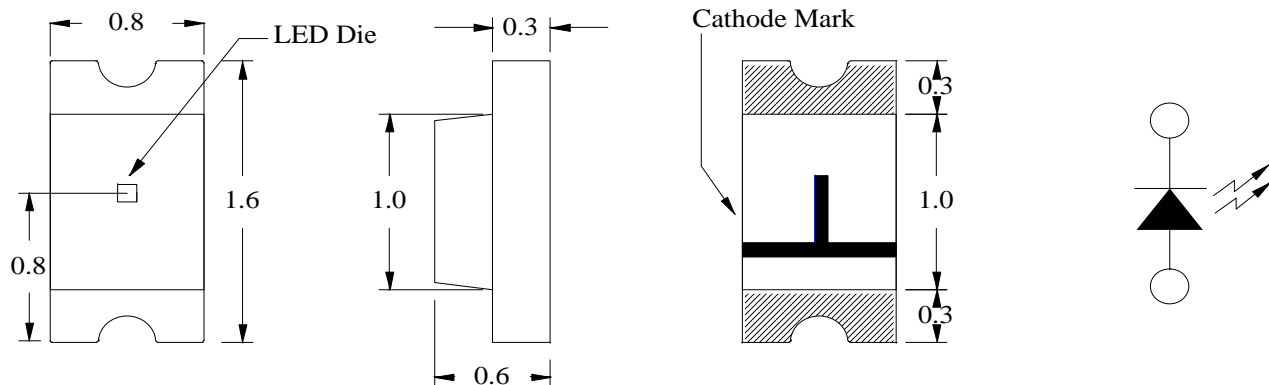

Recommended Solder Pad Layout

