

FEATURES AND SPECIFICATIONS

Features and Benefits

- Sizes 2 to 15 circuits
- Locking windows secure terminal to housing

Reference Information

Packaging: Bag
 UL File No.: E29179
 Use With: [5378](#)
 Designed In: Millimeters

Electrical

Voltage: 125V
 Current:

AWG	24	26	28
Amperes	2.0	2.0	1.5

Dielectric Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 MΩ min.


Physical

Housing: 6/6 nylon, UL 94V-0
 Operating Temperature: -40 to +105°C



2.00mm (.079") Pitch Board-In Connector Housing


5379



B

2.00 to 2.50mm (.079 to .098") Pitch

CATALOG DRAWING (FOR REFERENCE ONLY)

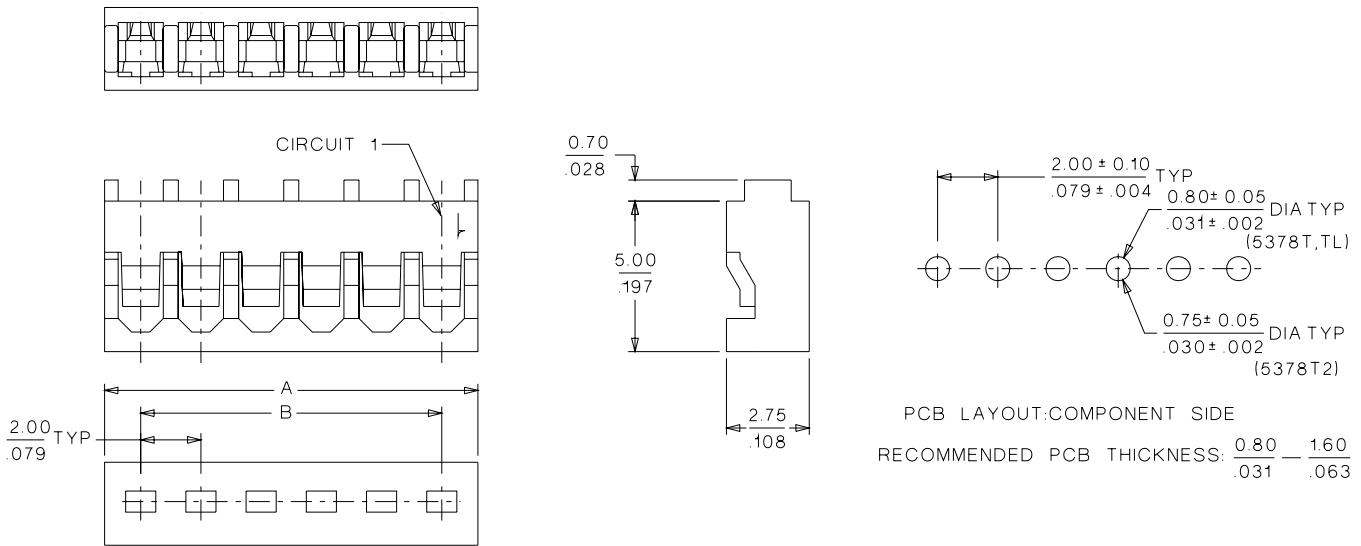

ORDERING INFORMATION AND DIMENSIONS

Circuits	Order No.	Dimension	
		A	B
2	39-01-0029	4.40 (.173)	2.00 (.079)
3	39-01-0039	6.40 (.252)	4.00 (.157)
4	39-01-0049	8.40 (.331)	6.00 (.236)
5	39-01-0059	10.40 (.409)	8.00 (.314)
6	39-01-0069	12.40 (.488)	10.00 (.393)
7	39-01-0079	14.40 (.567)	12.00 (.472)
8	39-01-0089	16.40 (.646)	14.00 (.551)
9	39-01-0099	18.40 (.724)	16.00 (.629)
10	39-01-0109	20.40 (.803)	18.00 (.708)
11	39-01-0119	22.40 (.882)	20.00 (.787)
12	39-01-0129	24.40 (.961)	22.00 (.866)
13	39-01-0139	26.40 (1.039)	24.00 (.944)
14	39-01-0149	28.40 (1.118)	26.00 (1.023)
15	39-01-0159	30.40 (1.197)	28.00 (1.102)