





PRODUCT SPECIFICATION

DATE : 02/22/2011


COSMO ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT KAQW612A	NO.61M22005	REV. 2
		SHEET 1 OF 10	

● OUTSIDE DIMENSION :




Unit : mm
Tolerance : $\pm 0.2\text{mm}$

● Operate / Reverse time (N.C)

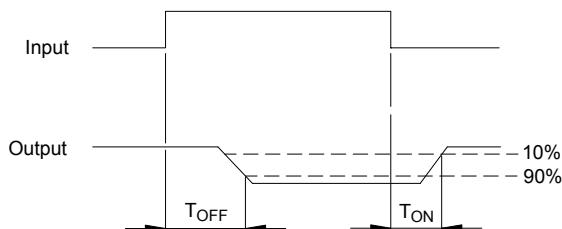

● Turn on / Turn off time (N.O)

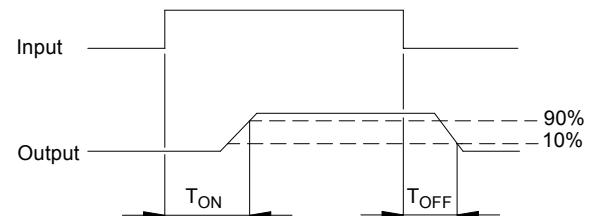

● Schematic and Wiring Diagrams

Schematic	Output Configuration	Load	Connection	Wiring Diagrams
<p>1a1b 1 FORM A/B 1 FORM C</p>	1a1b 1 FORM A/B 1 FORM C	AC/DC	-	(1) Two independent 1 Form A & 1 Form B use (2) 1 Form A 1 Form B use

PRODUCT SPECIFICATION

DATE : 02/22/2011

COSMO ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT KAQW612A	NO.61M22005	REV. 2
		SHEET 2 OF 10	

● Absolute Maximum Ratings

(Ta=25°C)

Emitter (Input)	Detector (Output)
Reverse Voltage 5.0V	Output Breakdown Voltage ± 60V
Continuous Forward Current 50mA	Continuous Load Current ± 200mA
Peak Forward Current 1A	Power Dissipation 500mW
Power Dissipation 100mW	
Derate Linearly from 25°C 1.3mW/°C	

General Characteristics

Isolation Test Voltage 5000VACrms	Storage Temperature Range -40°C to +125°C
Isolation Resistance Viso=500V, Ta=25°C $\geq 10^{10}\Omega$	Operating Temperature Range ... -40°C to +85°C
	Junction Temperature 100°C
Total Power Dissipation 550mW	Soldering Temperature ,
Derate Linearly from 25°C 2.5mW/°C	2mm from case , 10 sec 260°C

● Electro-optical Characteristics

(Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Emitter (Input)						
Forward Voltage	V_F	$I_F=10\text{mA}$		1.2	1.5	V
Operation Input Current	IF_{ON} (N.O) IF_{OFF} (N.C)	$V_L=\pm 20V$, $I_L=100\text{mA}$ (N.O) $V_L=\pm 20V$, $I_L \leq 5\mu\text{A}$ (N.C) $t=10\text{ms}$			5	mA
Recovery Input Current	IF_{OFF} (N.O) IF_{ON} (N.C)	$V_L=\pm 20V$, $I_L \leq 5\mu\text{A}$ (N.O) $V_L=\pm 20V$, $I_L=100\text{mA}$ (N.C) $t=10\text{ms}$	0.2			mA

Detector (Output) normally open

Output Breakdown Voltage	V_B	$I_B=50\mu\text{A}$	60			V
Output Off-State Leakage	I_{TOFF}	$V_T=60V$, $I_F=0\text{mA}$		0.2	1	μA
I/O Capacitance	C_{ISO}	$I_F=0$, $f=1\text{MHz}$		6		pF
ON Resistance	R_{ON}	$I_L=100\text{mA}$, $I_F=10\text{mA}$		0.83	2.5	Ω
Turn-On Time	T_{ON}	$I_F=10\text{mA}$, $V_L=\pm 20V$		0.2	1.0	ms
Turn-Off Time	T_{OFF}	$t=10\text{ms}$, $I_L=\pm 100\text{mA}$		0.3	1.5	ms

Detector (Output) normally close

Output Breakdown Voltage	V_B	$I_B=50\mu\text{A}$, $I_F=10\text{mA}$	60			V
Output Off-State Leakage	I_{TOFF}	$V_T=60V$, $I_F=10\text{mA}$		0.2	2	μA
I/O Capacitance	C_{ISO}	$I_F=0$, $f=1\text{MHz}$		6		pF
ON Resistance	R_{ON}	$I_L=100\text{mA}$, $I_F=0\text{mA}$		2.5	5	Ω
Operate (OFF) Time	T_{OFF}	$I_F=10\text{mA}$, $V_L=\pm 20V$		0.6	1.5	ms
Reverse (ON) Time	T_{ON}	$t=10\text{ms}$, $I_L=\pm 100\text{mA}$		0.3	1.0	ms

PRODUCT SPECIFICATION

DATE : 02/22/2011


COSMO ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT KAQW612A	NO.61M22005	REV. 2
		SHEET 3 OF 10	

● Data Curve (Normally Open Characteristics)

Load current vs. ambient temperature

Allowable ambient Temperature :


-40°C to +85°C

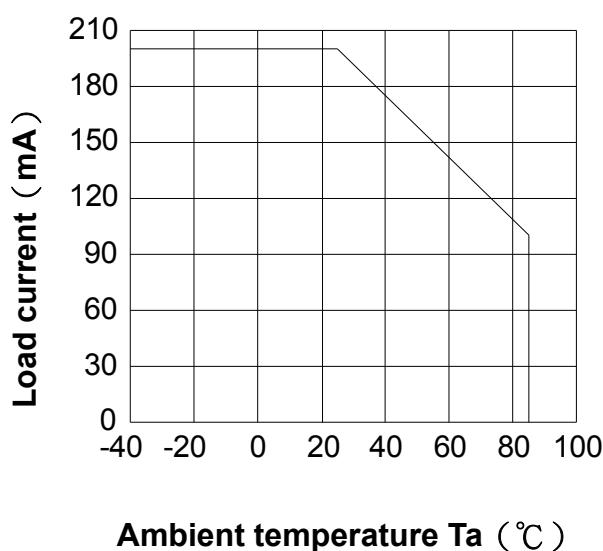

On resistance vs. ambient temperature across terminals 5 and 6 pin

LED current : 5mA

Continuous load current : 200mA (DC)

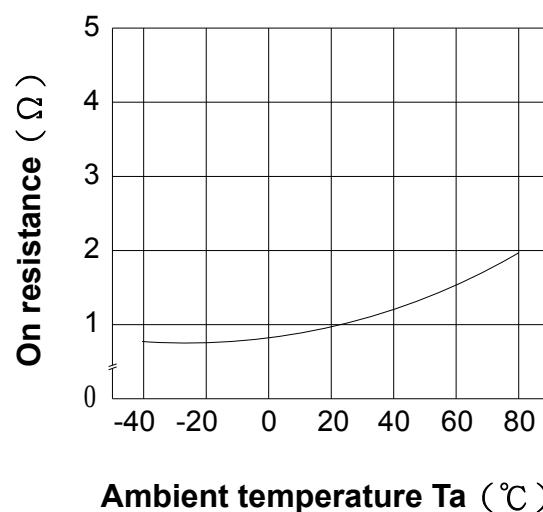


Turn on time vs. ambient temperature

Load voltage 60V (DC)

LED current : 5mA

Continuous load current : 200mA (DC)

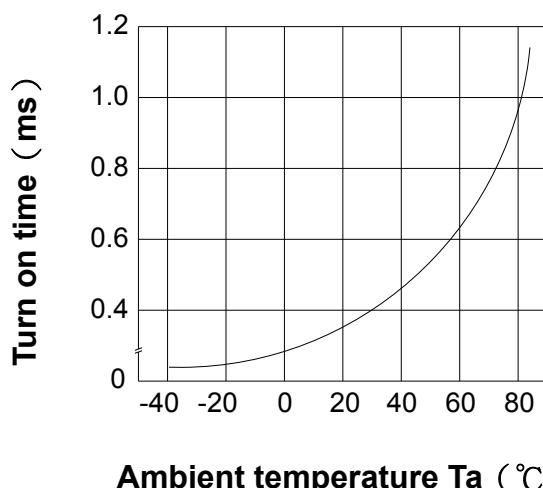


Turn off time vs. ambient temperature

Load voltage 60V (DC)

LED current : 5mA

Continuous load current : 200mA (DC)

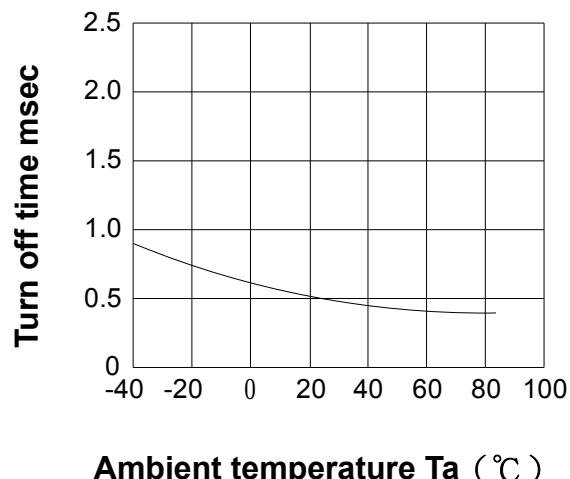

PRODUCT SPECIFICATION

DATE : 02/22/2011


COSMO ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT KAQW612A	NO.61M22005	REV. 2
SHEET 4 OF 10			

LED operate current vs.

ambient temperature

Load Voltage : 60V (DC)

Continuous load current : 200mA (DC)

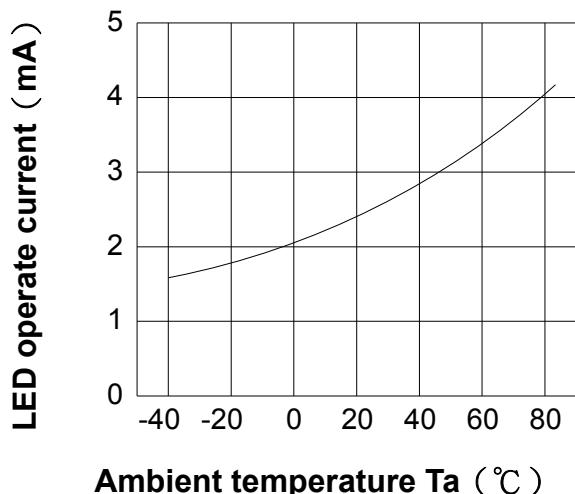


LED Turn Off current vs.

ambient temperature

Load Voltage : 60V (DC)


Continuous load current : 200mA (DC)

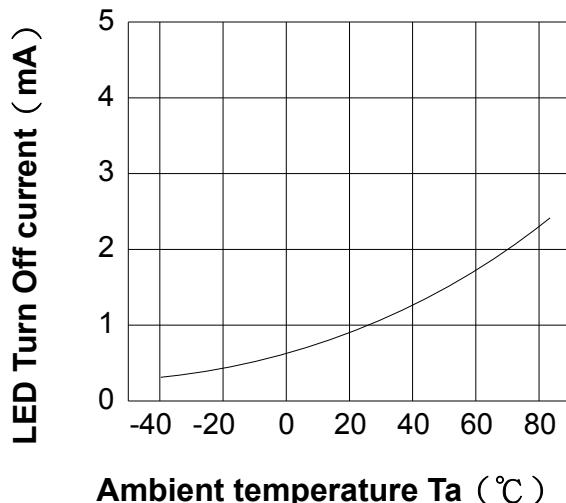

LED dropout voltage vs.

ambient temperature

LED current : 5 to 50mA

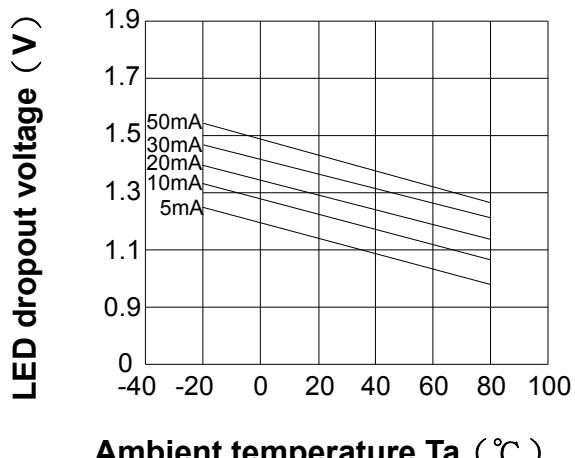


Voltage vs. current characteristics

of output at MOSFET portion

Measured portion : across terminals

5 and 6 pin

Ambient temperature : 25°C

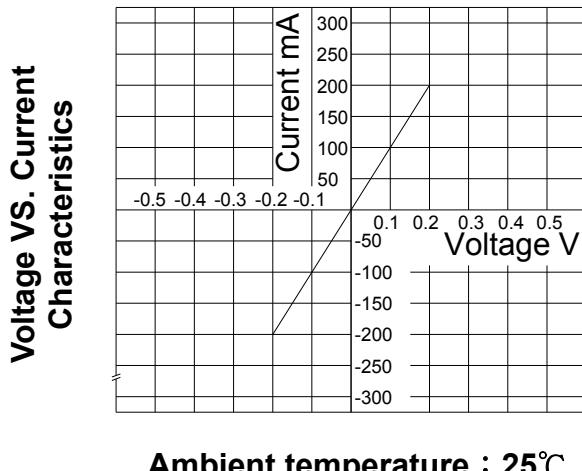

PRODUCT SPECIFICATION

DATE : 02/22/2011

COSMO ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT KAQW612A	NO.61M22005	REV. 2
SHEET 5 OF 10			


LED forward current vs. turn on time

Across terminals 5 and 6 pin

Load voltage : 60V (DC)

Continuous load current : 200mA (DC)

Ambient temperature : 25°C

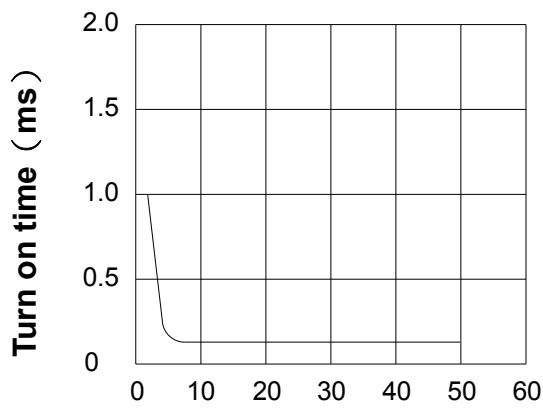


LED forward current (mA)

Off state leakage current

Across terminals 5 and 6 pin

Ambient temperature : 25°C

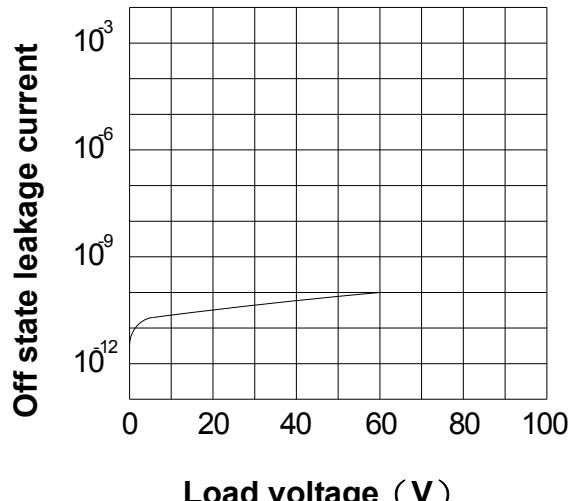

Load voltage (V)


LED forward current vs. turn off time

Across terminals 5 and 6 pin

Load voltage : 60V (DC)

Continuous load current : 200mA (DC)

Ambient temperature : 25°C

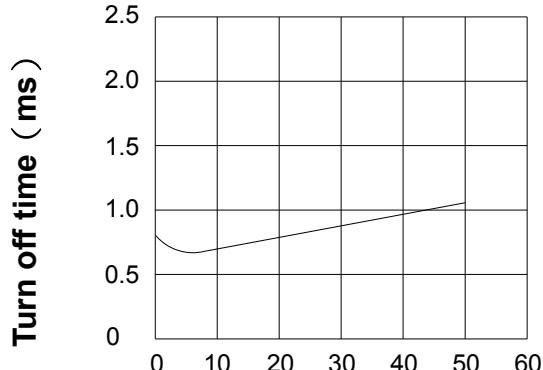


LED forward current (mA)

Applied voltage vs. output capacitance

Across terminals 5 and 6 pin

Frequency : 1MHz

Ambient temperature : 25°C

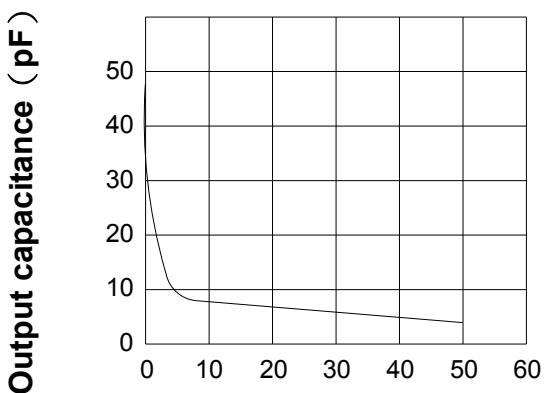

Applied voltage (V)

PRODUCT SPECIFICATION

DATE : 02/22/2011


COSMO ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT KAQW612A	NO.61M22005	REV. 2
		SHEET 6 OF 10	

● Data Curve (Normally Close Characteristics)

Load current vs. ambient temperature

Allowable ambient Temperature :

-40°C to +85°C

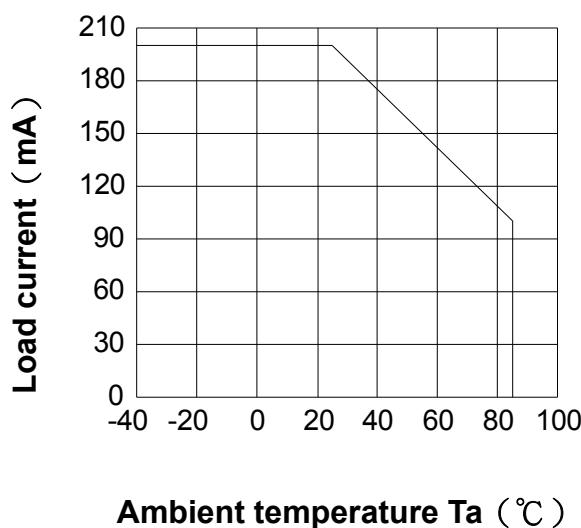


Ambient temperature Ta (°C)

On resistance vs. ambient temperature across terminals 7 and 8 pin

LED current : 0mA

Continuous load current : 200mA (DC)

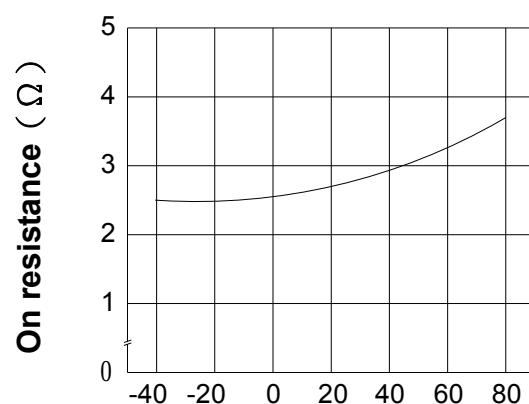

Ambient temperature Ta (°C)


Operate (OFF) time vs.

ambient temperature

Load voltage 60V (DC)

LED current : 5mA

Continuous load current : 200mA (DC)

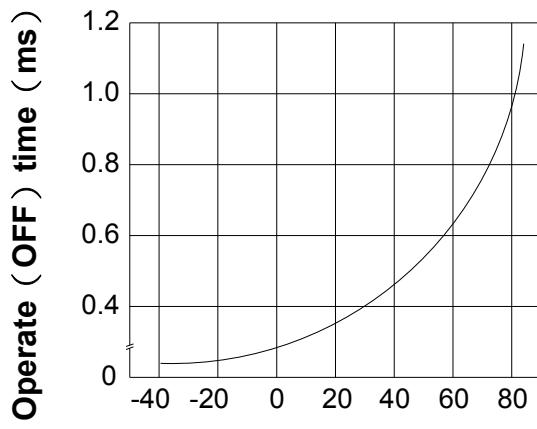

Ambient temperature Ta (°C)


Reverse (ON) time vs.

ambient temperature

Load voltage 60V (DC)

LED current : 5mA

Continuous load current : 200mA (DC)

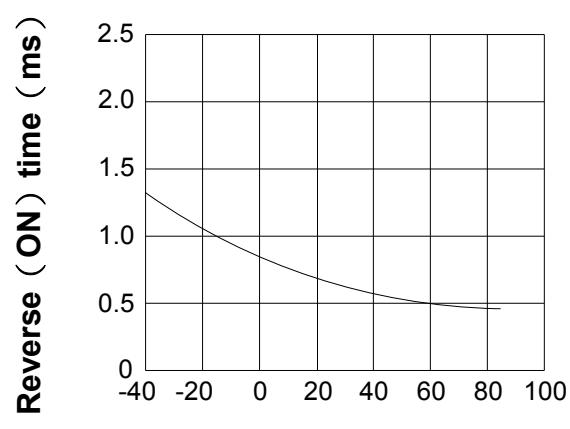


Ambient temperature Ta (°C)

PRODUCT SPECIFICATION


DATE : 02/22/2011

COSMO ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT KAQW612A	NO.61M22005	REV. 2
SHEET 7 OF 10			


LED Operate (OFF) current vs.
ambient temperature
Load Voltage : 60V (DC)
Continuous load current : 200mA (DC)

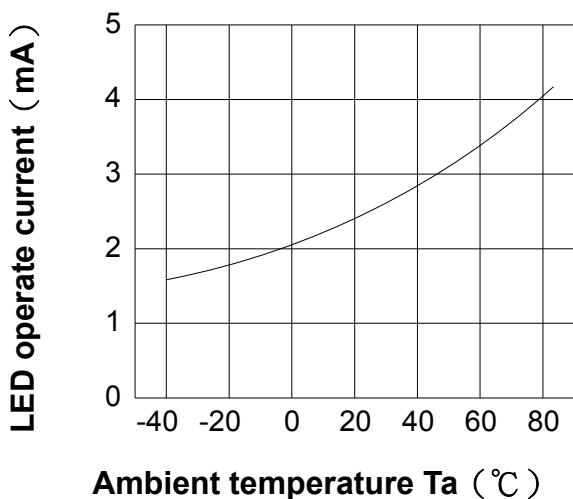


LED Reverse (ON) current vs.
ambient temperature
Load Voltage : 60V (DC)
Continuous load current : 200mA (DC)

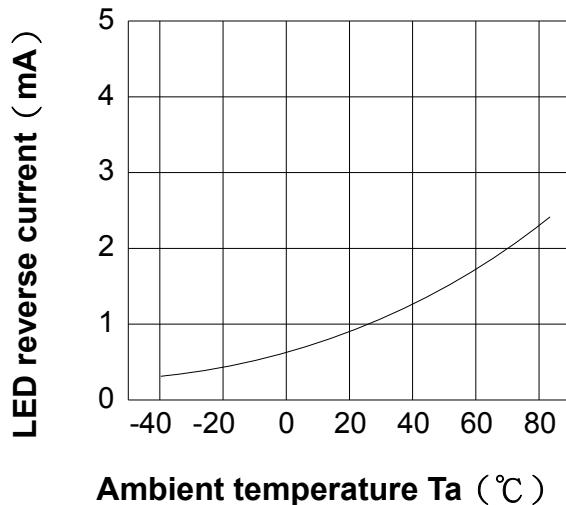

LED dropout voltage vs.
ambient temperature
LED current : 5 to 50mA

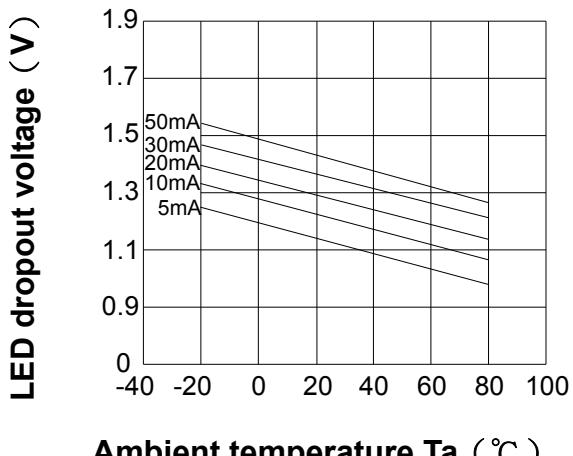

Voltage vs. current characteristics
of output at MOSFET portion
Measured portion : across terminals
7 and 8 pin
Ambient temperature : 25°C

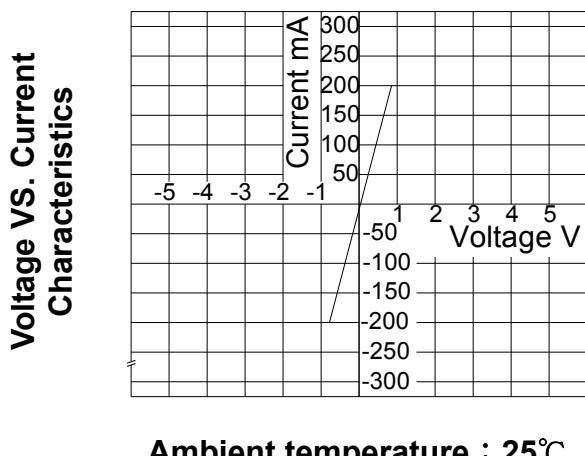

PRODUCT SPECIFICATION

DATE : 02/22/2011

COSMO ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT KAQW612A	NO.61M22005	REV. 2
SHEET 8 OF 10			


LED forward current vs. operate (OFF) time

Across terminals 7 and 8 pin

Load voltage : 60V (DC)

Continuous load current : 200mA (DC)


Ambient temperature : 25°C

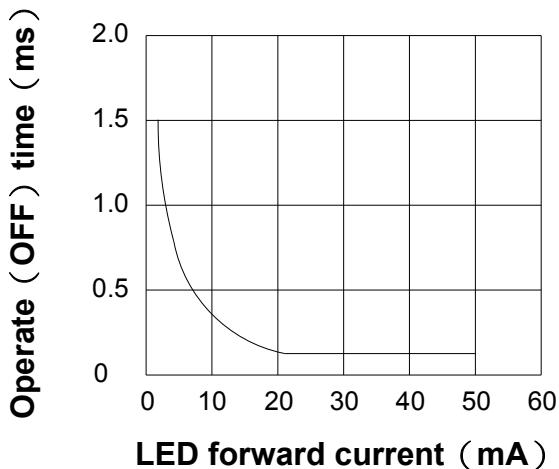

Off state leakage current

Across terminals 7 and 8 pin

Ambient temperature : 25°C

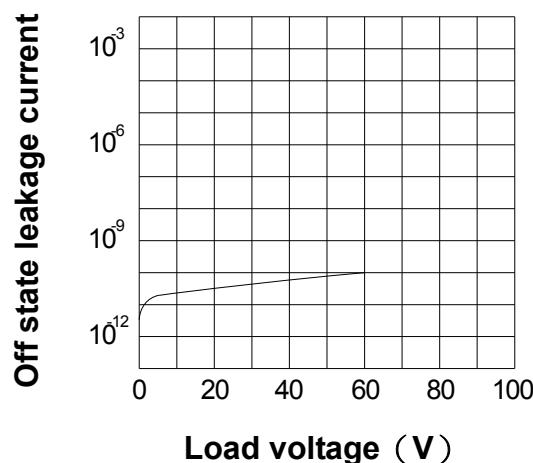


LED forward current vs. reverse (ON) time

Across terminals 7 and 8 pin

Load voltage : 60V (DC)

Continuous load current : 200mA (DC)

Ambient temperature : 25°C

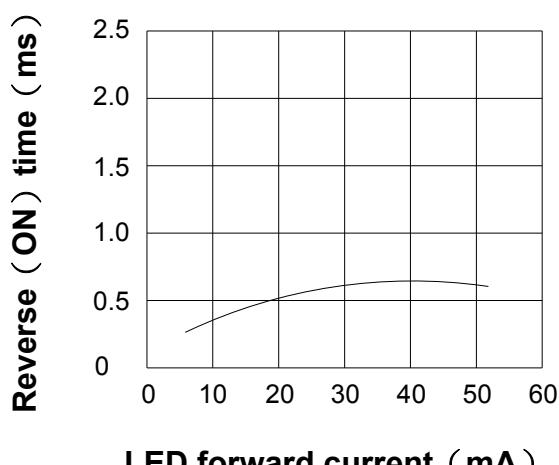


Applied voltage vs. output capacitance

Across terminals 7 and 8 pin

Frequency : 1MHz

Ambient temperature : 25°C

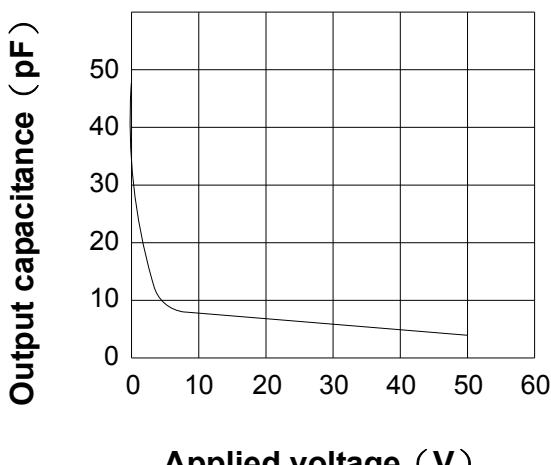

PRODUCT SPECIFICATION

DATE : 02/22/2011

COSMO
ELECTRONICS CORPORATION

SOLID STATE RELAY - MOSFET OUTPUT
KAQW612A

NO.61M22005
SHEET 9 OF 10


REV.
2

● USING METHODS

Examples of resistance value to control LED forward current (IF)


SSR-MOSFET OUTPUT

(IF=5mA)

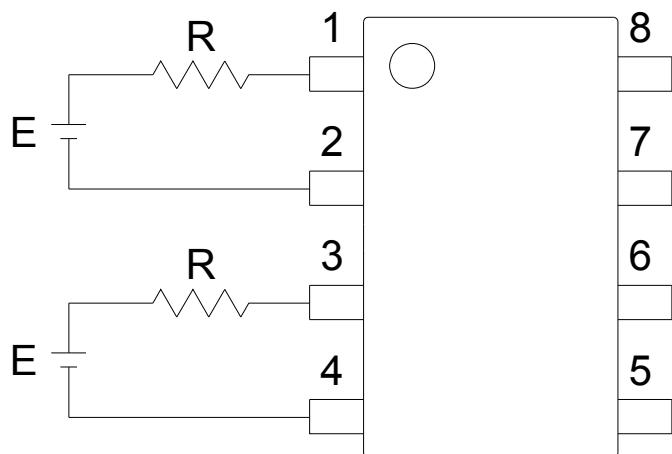

E	R
3.3V	Approx. 330 Ω
5V	Approx. 640 Ω
12V	Approx. 1.9K Ω
15V	Approx. 2.5K Ω
24V	Approx. 4.1K Ω

- (1) LED forward current must be more than 5mA , at E min.
- (2) LED forward current must be less than 50mA , at E max.

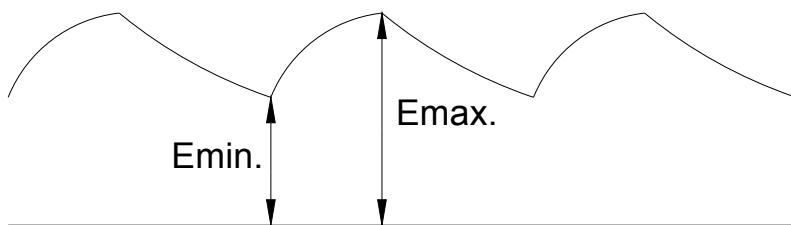



PRODUCT SPECIFICATION

DATE : 02/22/2011

COSMO ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT KAQW612A	NO.61M22005	REV. 2
		SHEET 10 OF 10	

● USING METHODS

Regulate the spike voltage generated on the inductive load as follows :

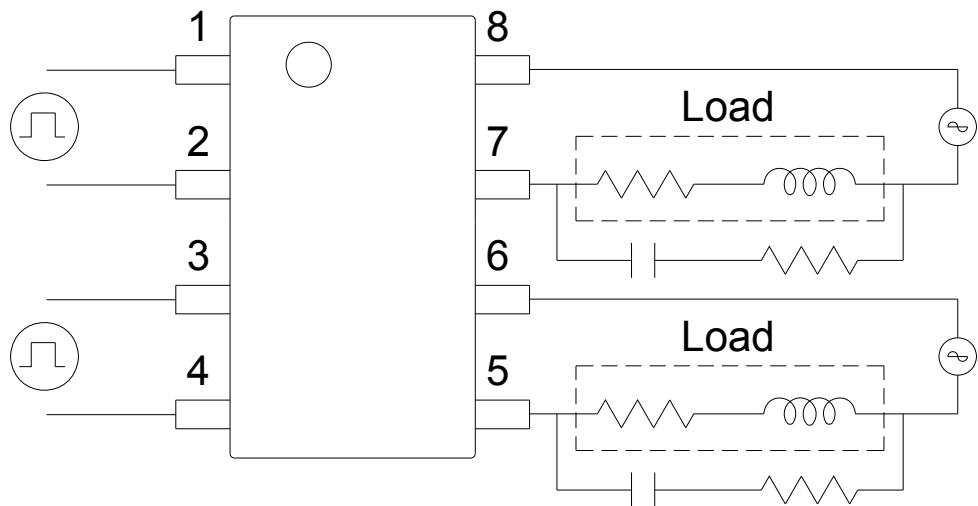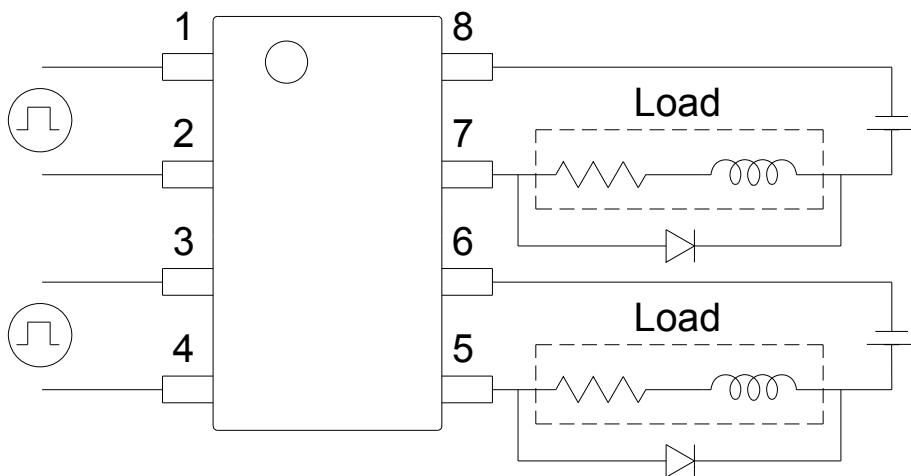

R-C Snubber