
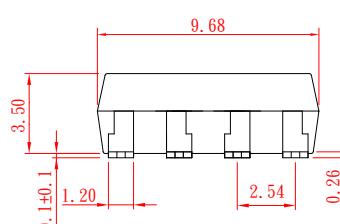
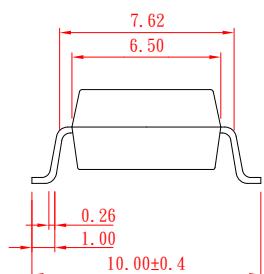
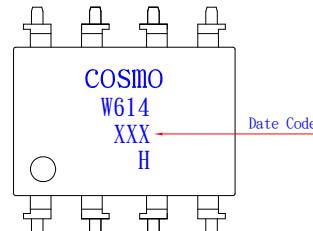


# PRODUCT SPECIFICATION

DATE : 02/22/2011


<b>cosmo</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQW614HA</b>	NO.61M22004	REV. 2
		SHEET 1 OF 10	

## ● OUTSIDE DIMENSION :




Unit : mm  
Tolerance :  $\pm 0.2\text{mm}$

## ● Operate / Reverse time ( N.C )

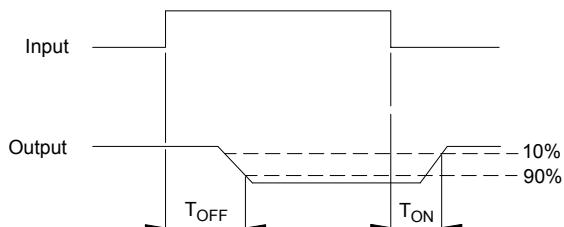

## ● Turn on / Turn off time ( N.O )

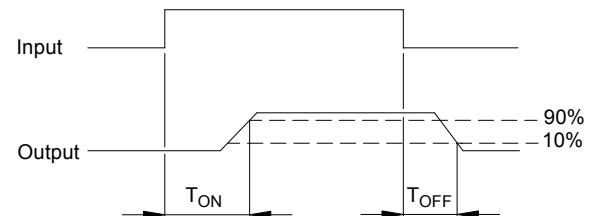

## ● Schematic and Wiring Diagrams

Schematic	Output Configuration	Load	Connection	Wiring Diagrams
<p>1a1b 1 FORM A/B 1 FORM C</p>	1a1b 1 FORM A/B 1 FORM C	AC/DC	-	<p>(1) Two independent 1 Form A &amp; 1 Form B use</p> <p>(2) 1 Form A 1 Form B use</p>

# PRODUCT SPECIFICATION

DATE : 02/22/2011

<b>COSMO</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQW614HA</b>	NO.61M22004	REV. 2
		SHEET 2 OF 10	

## ● Absolute Maximum Ratings

( Ta=25°C )

Emitter ( Input )	Detector ( Output )
Reverse Voltage ..... 5.0V	Output Breakdown Voltage ..... ± 400V
Continuous Forward Current ..... 50mA	Continuous Load Current ..... ± 130mA
Peak Forward Current ..... 1A	Power Dissipation ..... 500mW
Power Dissipation ..... 100mW	
Derate Linearly from 25°C ..... 1.3mW/°C	

## General Characteristics

Isolation Test Voltage ..... 5000VACrms	Storage Temperature Range ..... -40°C to +125°C
Isolation Resistance Viso=500V, Ta=25°C ..... $\geq 10^{10}\Omega$	Operating Temperature Range ... -40°C to +85°C
Total Power Dissipation ..... 550mW	Junction Temperature ..... 100°C
Derate Linearly from 25°C ..... 2.5mW/°C	Soldering Temperature , 2mm from case , 10 sec ..... 260°C

## ● Electro-optical Characteristics

( Ta=25°C )

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
<b>Emitter ( Input )</b>						
Forward Voltage	$V_F$	$I_F=10\text{mA}$		1.2	1.5	V
Operation Input Current	$I_{FON}$ ( N.O ) $I_{FOFF}$ ( N.C )	$V_L=\pm 20V, I_L=100\text{mA}$ ( N.O ) $V_L=\pm 20V, I_L \leq 5\mu\text{A}$ ( N.C ) $t=10\text{ms}$			5	mA
Recovery Input Current	$I_{FOFF}$ ( N.O ) $I_{FON}$ ( N.C )	$V_L=\pm 20V, I_L \leq 5\mu\text{A}$ ( N.O ) $V_L=\pm 20V, I_L=100\text{mA}$ ( N.C ) $t=10\text{ms}$	0.2			mA

Detector ( Output ) normally open						
Output Breakdown Voltage	$V_B$	$I_B=50\mu\text{A}$	400			V
Output Off-State Leakage	$I_{TOFF}$	$V_T=100V, I_F=0\text{mA}$		0.2	1	$\mu\text{A}$
I/O Capacitance	$C_{ISO}$	$I_F=0, f=1\text{MHz}$		6		pF
ON Resistance	$R_{ON}$	$I_L=100\text{mA}, I_F=10\text{mA}$		20	30	$\Omega$
Turn-On Time	$T_{ON}$	$I_F=10\text{mA}, V_L=\pm 20V$ $t=10\text{ms}, I_L=\pm 100\text{mA}$		0.3	1.0	ms
Turn-Off Time	$T_{OFF}$			0.7	1.5	ms

Detector ( Output ) normally close						
Output Breakdown Voltage	$V_B$	$I_B=50\mu\text{A}, I_F=10\text{mA}$	400			V
Output Off-State Leakage	$I_{TOFF}$	$V_T=100V, I_F=10\text{mA}$		0.2	2	$\mu\text{A}$
I/O Capacitance	$C_{ISO}$	$I_F=0, f=1\text{MHz}$		6		pF
ON Resistance	$R_{ON}$	$I_L=100\text{mA}, I_F=0\text{mA}$		25	50	$\Omega$
Operate ( OFF ) Time	$T_{OFF}$	$I_F=10\text{mA}, V_L=\pm 20V$ $t=10\text{ms}, I_L=\pm 100\text{mA}$		0.6	1.5	ms
Reverse ( ON ) Time	$T_{ON}$			0.3	1.0	ms

# PRODUCT SPECIFICATION

DATE : 02/22/2011


<b>cosmo</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQW614HA</b>	NO.61M22004	REV. 2
		SHEET 3 OF 10	

## ● Data Curve ( Normally Open Characteristics )

Load current vs. ambient temperature

Allowable ambient Temperature :

-40°C to +85°C

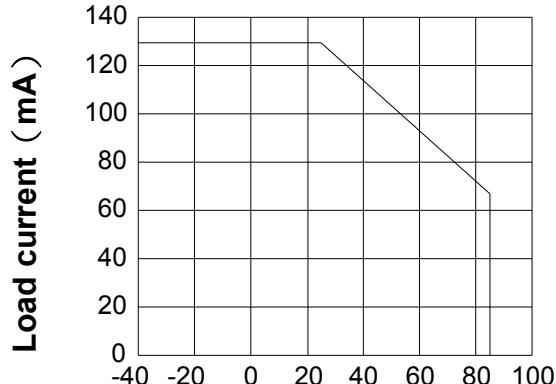


Ambient temperature Ta (°C)

On resistance vs. ambient temperature across terminals 5 and 6 pin

LED current : 5mA

Continuous load current : 130mA (DC)

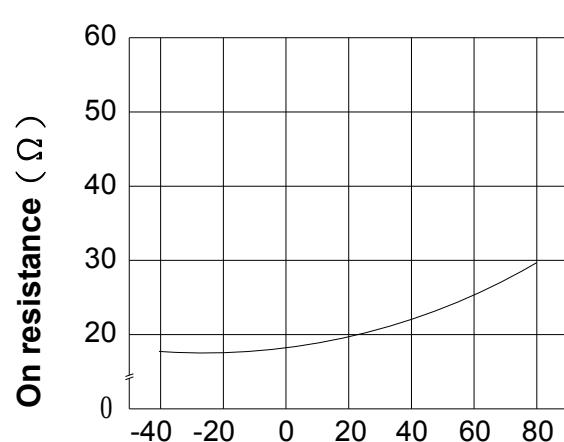


Ambient temperature Ta (°C)

Turn on time vs. ambient temperature

Load voltage 400V (DC)

LED current : 5mA

Continuous load current : 130mA (DC)

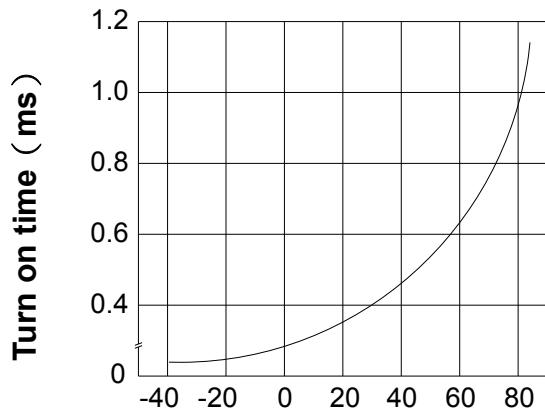


Ambient temperature Ta (°C)

Turn off time vs. ambient temperature

Load voltage 400V (DC)

LED current : 5mA

Continuous load current : 130mA (DC)

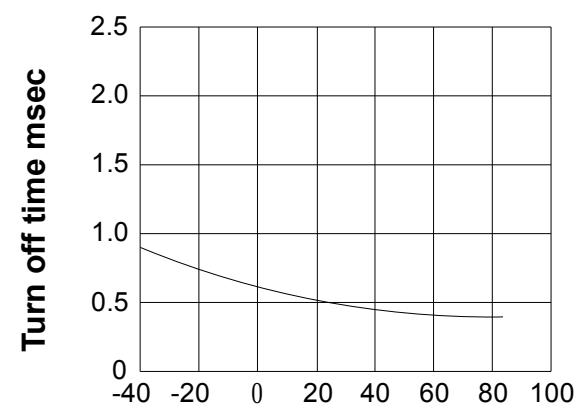


Ambient temperature Ta (°C)

# PRODUCT SPECIFICATION


DATE : 02/22/2011

<b>cosmo</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQW614HA</b>	NO.61M22004	REV. 2
SHEET 4 OF 10			


LED operate current vs.  
ambient temperature  
Load Voltage : 400V (DC)  
Continuous load current : 130mA (DC)

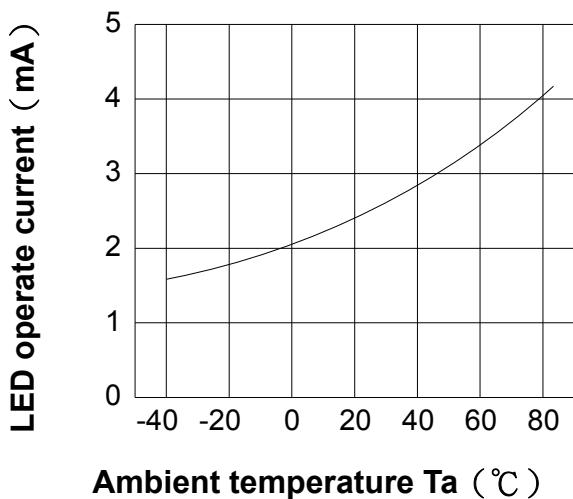


LED Turn Off current vs.  
ambient temperature  
Load Voltage : 400V (DC)  
Continuous load current : 130mA (DC)

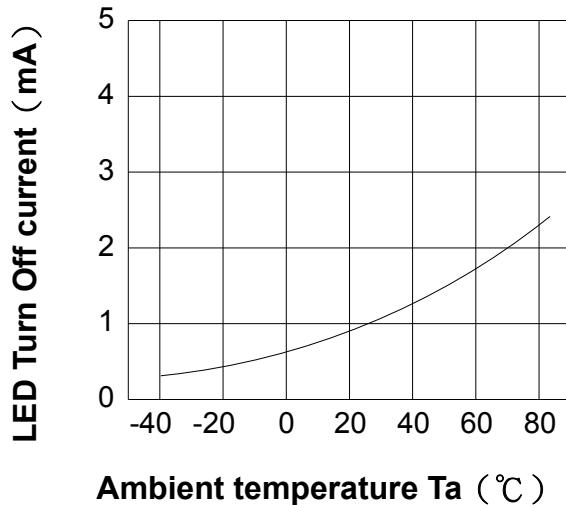

LED dropout voltage vs.  
ambient temperature  
LED current : 5 to 50mA

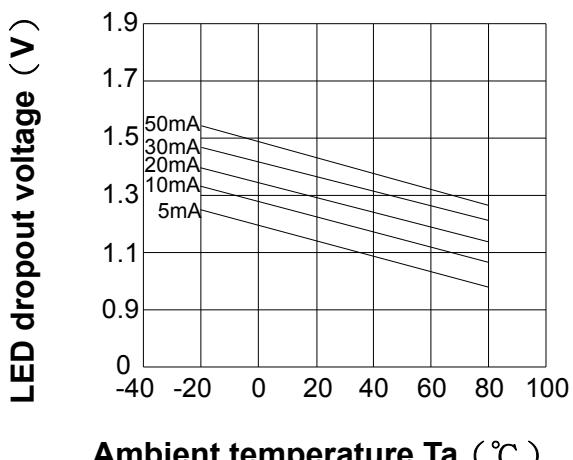

Voltage vs. current characteristics  
of output at MOSFET portion  
Measured portion : across terminals  
5 and 6 pin  
Ambient temperature : 25°C

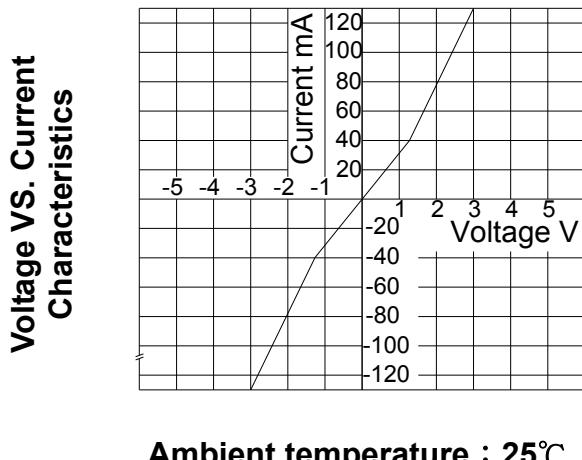

# PRODUCT SPECIFICATION

DATE : 02/22/2011

<b>cosmo</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQW614HA</b>	NO.61M22004	REV. 2
		SHEET 5 OF 10	


## LED forward current vs. turn on time

Across terminals 5 and 6 pin


Load voltage : 400V (DC)

Continuous load current : 130mA (DC)

Ambient temperature : 25°C

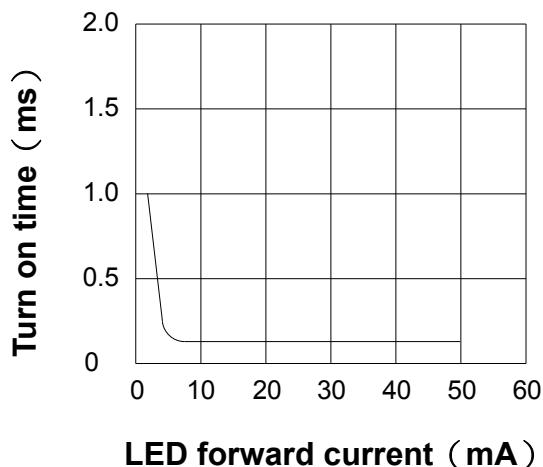

Off state leakage current  
Across terminals 5 and 6 pin  
Ambient temperature : 25°C

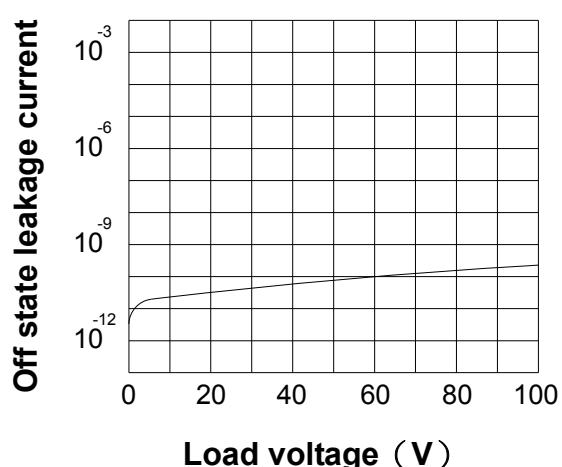


## LED forward current vs. turn off time

Across terminals 5 and 6 pin

Load voltage : 400V (DC)

Continuous load current : 130mA (DC)

Ambient temperature : 25°C

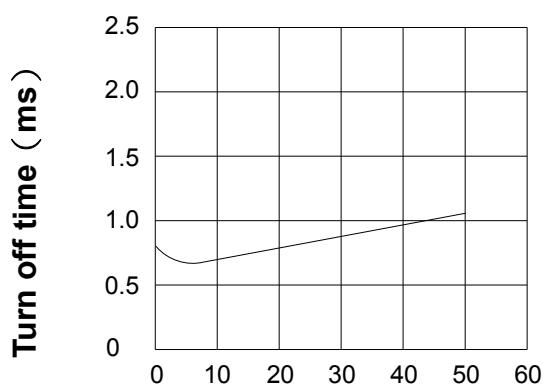


## Applied voltage vs. output capacitance

Across terminals 5 and 6 pin

Frequency : 1MHz

Ambient temperature : 25°C

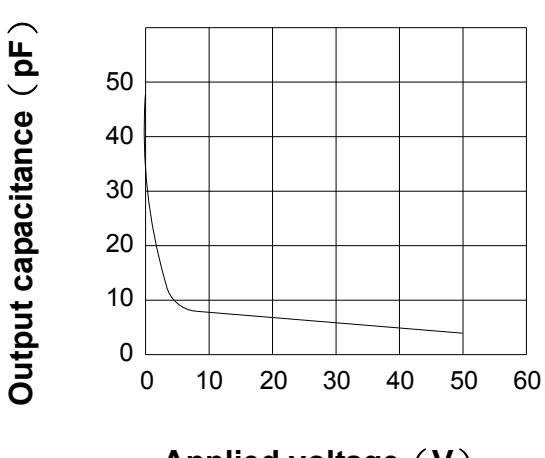

# PRODUCT SPECIFICATION

DATE : 02/22/2011

<b>cosmo</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQW614HA</b>	NO.61M22004	REV. 2
		SHEET 6 OF 10	

## ● Data Curve ( Normally Close Characteristics )

Load current vs. ambient temperature


Allowable ambient Temperature :

-40°C to +85°C


On resistance vs. ambient temperature across terminals 7 and 8 pin

LED current : 0mA

Continuous load current : 130mA ( DC )

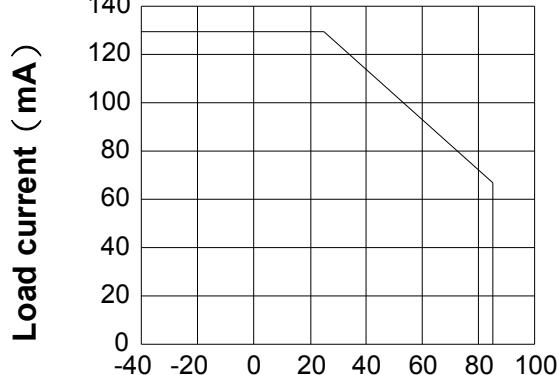

Ambient temperature Ta ( °C )

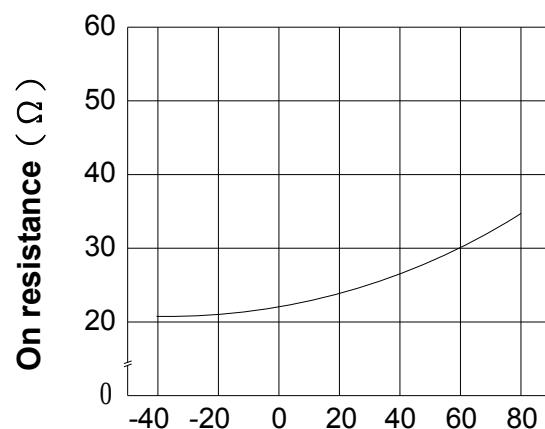

Ambient temperature Ta ( °C )

Operate ( OFF ) time vs.

ambient temperature

Load voltage 400V ( DC )

LED current : 5mA

Continuous load current : 130mA ( DC )


Reverse ( ON ) time vs.

ambient temperature


Load voltage 400V ( DC )

LED current : 5mA

Continuous load current : 130mA ( DC )

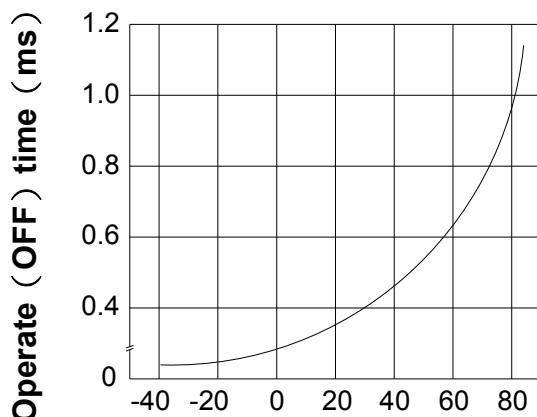

Ambient temperature Ta ( °C )

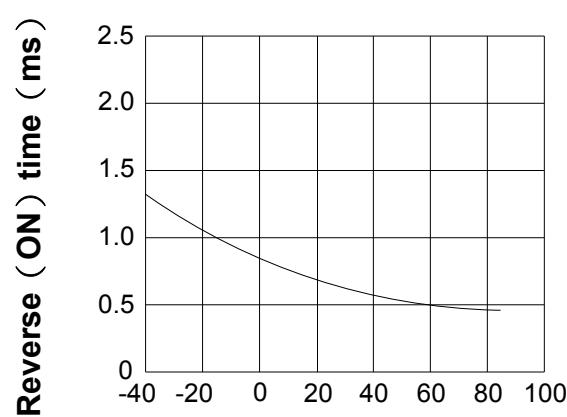


Ambient temperature Ta ( °C )

# PRODUCT SPECIFICATION


DATE : 02/22/2011

<b>COSMO</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQW614HA</b>	NO.61M22004	REV. 2
SHEET 7 OF 10			


LED Operate ( OFF ) current vs.  
ambient temperature  
Load Voltage : 400V ( DC )  
Continuous load current : 130mA ( DC )

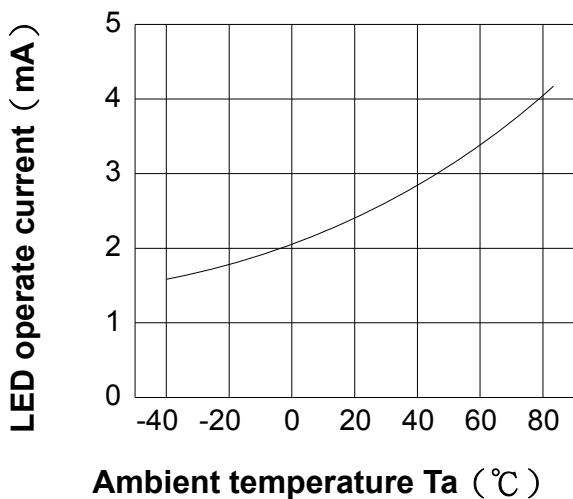


LED Reverse ( ON ) current vs.  
ambient temperature  
Load Voltage : 400V ( DC )  
Continuous load current : 130mA ( DC )

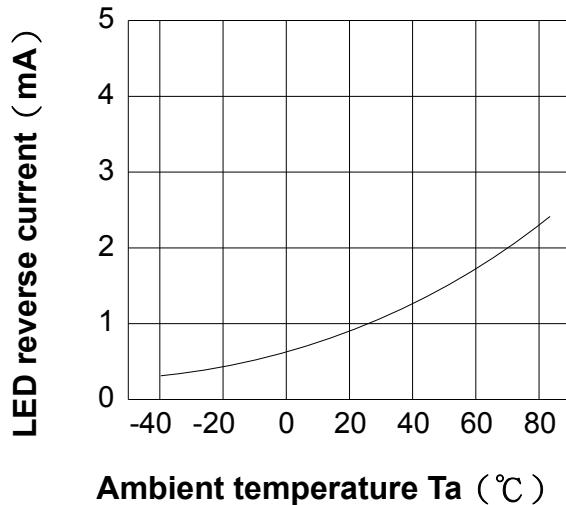

LED dropout voltage vs.  
ambient temperature  
LED current : 5 to 50mA

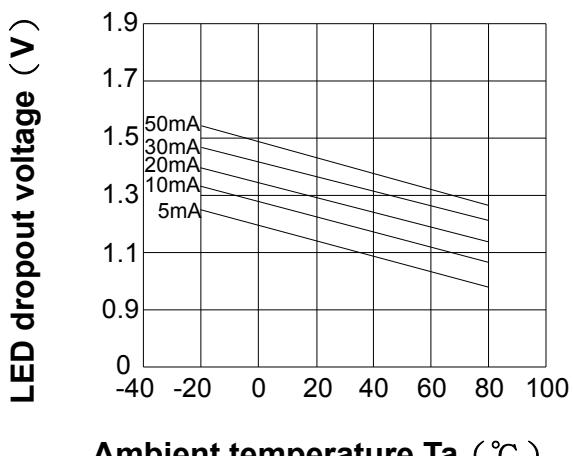

Voltage vs. current characteristics  
of output at MOSFET portion  
Measured portion : across terminals  
7 and 8 pin  
Ambient temperature : 25°C

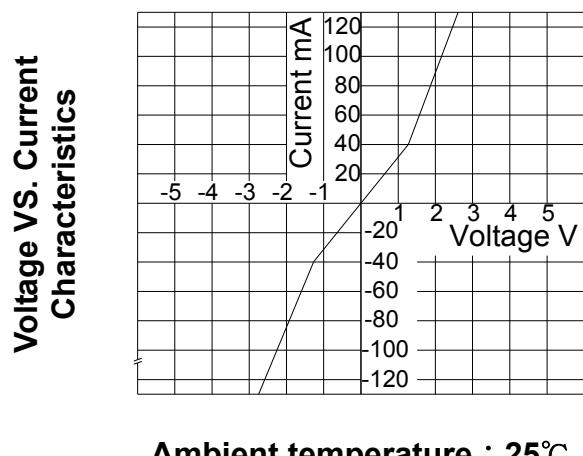

# PRODUCT SPECIFICATION

DATE : 02/22/2011

<b>cosmo</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQW614HA</b>	NO.61M22004	REV. 2
SHEET 8 OF 10			


## LED forward current vs. operate (OFF) time

Across terminals 7 and 8 pin


Load voltage : 400V (DC)

Continuous load current : 130mA (DC)

Ambient temperature : 25°C

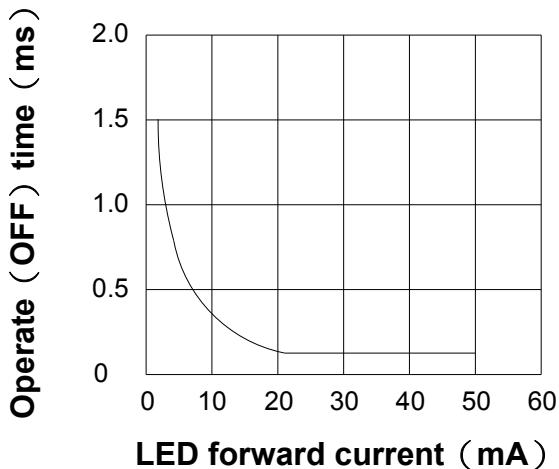

Off state leakage current  
Across terminals 7 and 8 pin  
Ambient temperature : 25°C

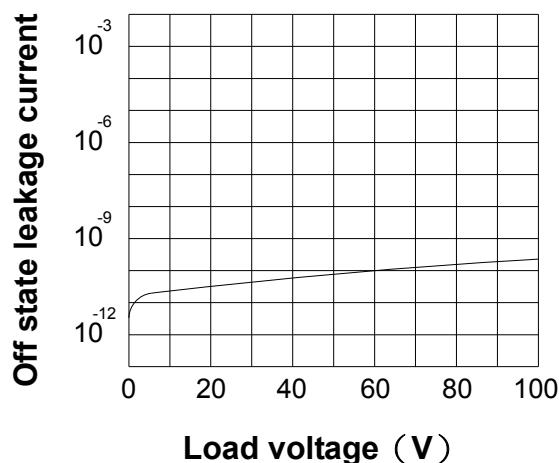


## LED forward current vs. reverse (ON) time

Across terminals 7 and 8 pin


Load voltage : 400V (DC)

Continuous load current : 130mA (DC)

Ambient temperature : 25°C

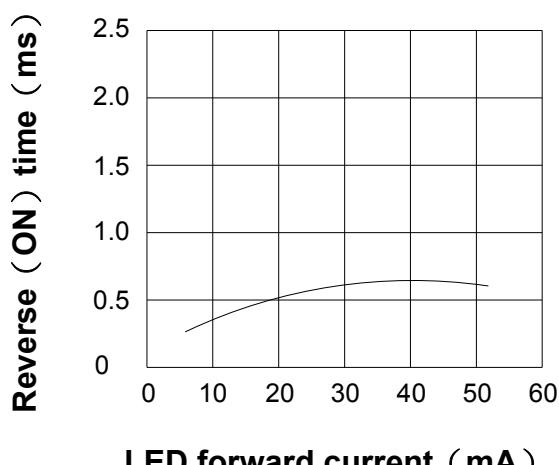

Applied voltage vs. output capacitance  
Across terminals 7 and 8 pin  
Frequency : 1MHz  
Ambient temperature : 25°C

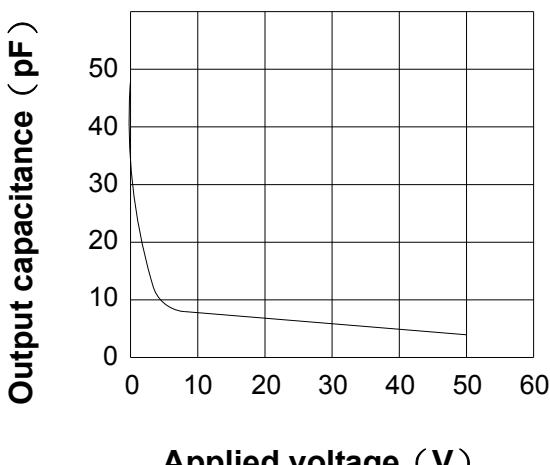

# PRODUCT SPECIFICATION

DATE : 02/22/2011


<b>cosmo</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQW614HA</b>	NO.61M22004	REV. 2
SHEET 9 OF 10			

## ● USING METHODS

Examples of resistance value to control LED forward current (IF)


SSR-MOSFET OUTPUT

( IF=5mA )

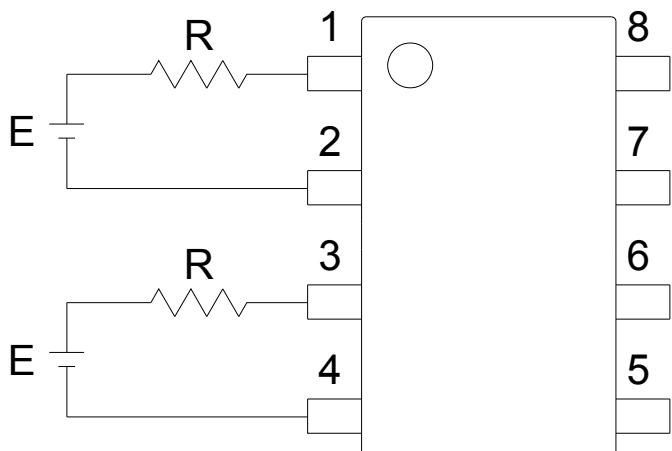

E	R
3.3V	Approx. 330 Ω
5V	Approx. 640 Ω
12V	Approx. 1.9K Ω
15V	Approx. 2.5K Ω
24V	Approx. 4.1K Ω

- (1) LED forward current must be more than 5mA , at E min.
- (2) LED forward current must be less than 50mA , at E max.

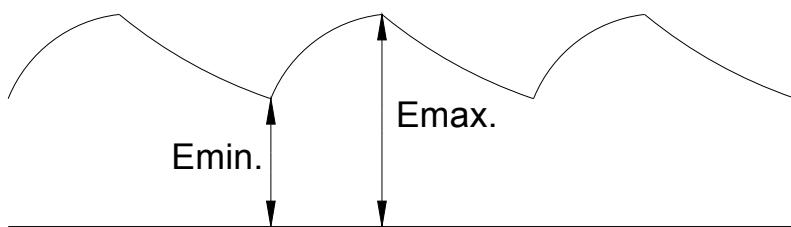

# PRODUCT SPECIFICATION

DATE : 02/22/2011

**cosmo**  
ELECTRONICS CORPORATION



SOLID STATE RELAY - MOSFET OUTPUT  
**KAQW614HA**

NO.61M22004  
SHEET 10 OF 10

REV.  
2

## ● USING METHODS

Regulate the spike voltage generated on the inductive load as follows :

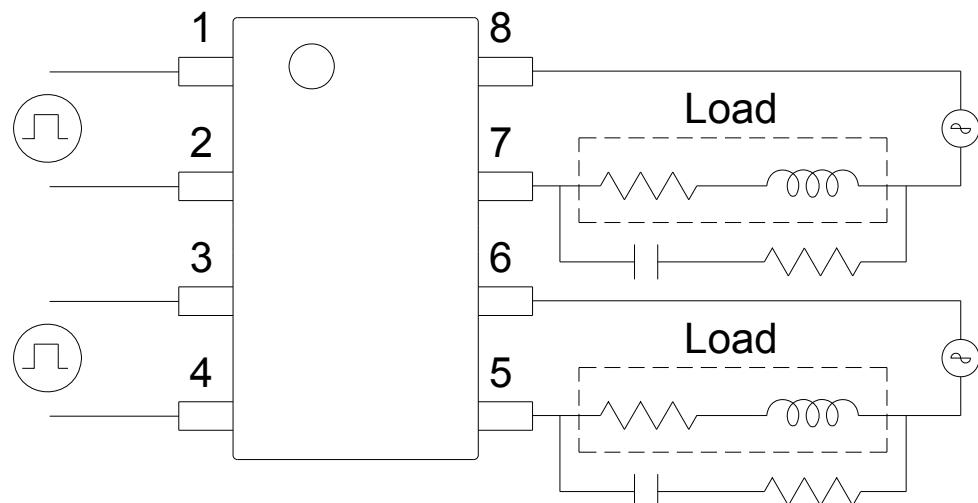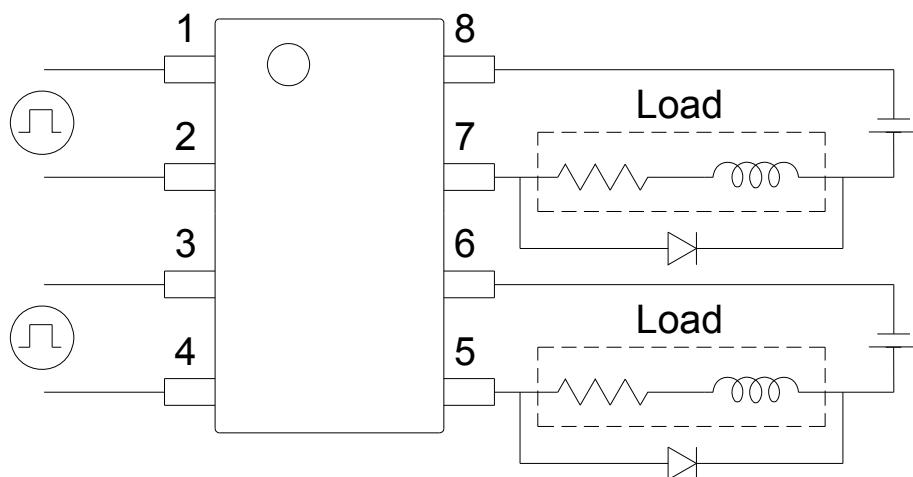

R-C Snubber