




## MULTIPLE STUD TERMINALS

### Vinyl Insulated Funnel Entry

- Insulation Support

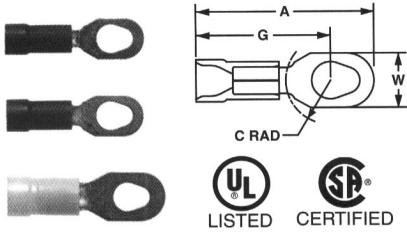


PANDUIT® Part Number	Wire Range	Color Code	Max. Ins.	Stud Size	Dimensions (In.)				Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.	Crimp Tools
					A	W	C	G					
<b>PV18-610R-C</b>	22-18 .03" Thick Stock	Red	.150	#6 #8 #10	1.00	.31	.25	.75	100	500	1000	6000	CT-100 CT-600‡ CT-1550‡ CT-1551‡
<b>PV14-610R-C</b>	16-14 .03" Thick Stock	Blue	.170	#6 #8 #10	1.00	.31	.25	.75	100	500	1000	6000	
<b>PV10-610R-L</b>	12-10 .04" Thick Stock	Yellow	.225	#6 #8 #10	1.17	.37	.31	.89	50	500	500	3000	
<b>PT18-4R-C</b> <b>PT18-6R-C</b> <b>PT18-8R-C</b> <b>PT18-10R-C</b> <b>PT18-14R-C</b>	22-18 .03 Stock	Red	.145	#4	.75	.25	.22	.63	100	500	—	—	CT-100 CT-600^ CT-1550^ CT-1551^
#6				.78	.25	.22	.63	100	500	—	—		
#8				.84	.31	.29	.69	100	500	—	—		
#10				.84	.31	.29	.69	100	500	—	—		
1/4"				1.05	.46	.40	.82	100	500	—	—		
<b>PT14-4R-C</b> <b>PT14-6R-C</b> <b>PT14-8R-C</b> <b>PT14-10R-C</b> <b>PT14-14R-C</b>	16-14 .03 Stock	Blue	.162	#4	.75	.25	.22	.63	100	500	—	—	
#6				.84	.31	.29	.68	100	500	—	—		
#8				.84	.31	.29	.68	100	500	—	—		
#10				.84	.31	.29	.68	100	500	—	—		
1/4"				1.05	.46	.40	.82	100	500	—	—		
<b>PT10-6R-L</b> <b>PT10-8R-L</b> <b>PT10-10R-L</b> <b>PT10-14R-L</b>	12-10 .04 Stock	Yellow	.225	#6	1.03	.37	.33	.84	50	500	—	—	
#8				1.03	.37	.33	.84	50	500	—	—		
#10				1.03	.37	.33	.84	50	500	—	—		
1/4"				1.18	.52	.42	.92	50	500	—	—		

## RING TERMINALS

### TEFZEL\* Insulated

- Insulation Grip Sleeve
- Butted Seam with Metal Sleeve
- For Nuclear Containment Areas and High Temperature (to 150°C) Applications
- Color Code: White with One Color Stripe

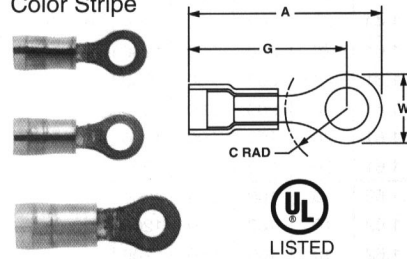


‡ UL and CSA approved tooling/product combinations.  
^UL approved tooling/product combinations.  
\* TEFZEL® is a registered trademark of E.I. du Pont de Nemours and Company.

Order the number of pieces required in multiples of standard package quantities.  
L = 50 pcs., C = 100 pcs., D = 500 pcs. and M = 1000 pcs.  
*Prime items appear in BOLD.*

## RING TERMINALS HEAVY DUTY

### Nylon Insulated

- Insulation Grip Sleeve
- Manufactured from stock 56% thicker than a standard #16-14 AWG terminal
- Designed for use in demanding applications such as construction and electric utilities

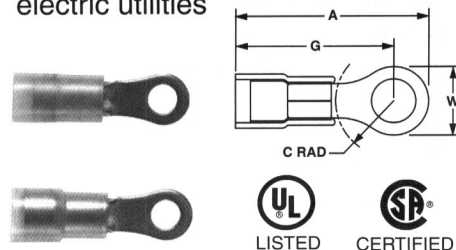

PANDUIT® Part Number	Wire Range	Color Code	Max. Ins.	Stud Size	Dimensions (In.)				Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.	Crimp Tools
					A	W	C	G					
<b>PN12-6HDR-L</b>	16-12 .05 Stock	Yellow	.225	#6	1.06	.31	.35	.91	50	500	500	3000	CT-1550‡ CT-1551‡
<b>PN12-8HDR-L</b>				#8	1.06	.31	.35	.90	50	500	500	3000	
<b>PN12-10HDR-L</b>				#10	1.09	.37	.33	.89	50	500	500	3000	
<b>PN12-14HDR-L</b>				1/4"	1.24	.52	.42	.98	50	500	500	3000	
<b>PN12-56HDR-L</b>				5/16"	1.24	.52	.42	.98	50	500	500	3000	
<b>PN12-38HDR-L</b>				3/8"	1.30	.58	.46	1.02	50	500	500	3000	

Order the number of pieces required in multiples of standard package quantities.  
L = 50 pcs. and D = 500 pcs.  
‡ UL and CSA approved tooling/product combinations.  
*Prime items appear in BOLD.*