

General Description

The UD2401 is the highest performance trench P-ch MOSFETs with extreme high cell density , which provide excellent RDSON and gate charge for most of the synchronous buck converter applications .

The UD2401 meet the RoHS and Green Product requirement , with full function reliability approved.

Features

- Advanced high cell density Trench technology
- Super Low Gate Charge
- Excellent CdV/dt effect decline
- Green Device Available

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	-20	V
V_{GS}	Gate-Source Voltage	± 12	V
$I_D @ T_C = 25^\circ C$	Continuous Drain Current, $V_{GS} @ -4.5V^1$	-18.4	A
$I_D @ T_C = 100^\circ C$	Continuous Drain Current, $V_{GS} @ -4.5V^1$	-11.6	A
$I_D @ T_A = 25^\circ C$	Continuous Drain Current, $V_{GS} @ -4.5V^1$	-5.2	A
$I_D @ T_A = 70^\circ C$	Continuous Drain Current, $V_{GS} @ -4.5V^1$	-4.2	A
I_{DM}	Pulsed Drain Current ²	-50	A
$P_D @ T_C = 25^\circ C$	Total Power Dissipation ³	25	W
$P_D @ T_A = 25^\circ C$	Total Power Dissipation ³	2	W
T_{STG}	Storage Temperature Range	-55 to 150	°C
T_J	Operating Junction Temperature Range	-55 to 150	°C


Product Summary

BV _{bss}	R _{Ds(ON)}	ID
-20V	52mΩ	-18.4A

Applications

- High Frequency Point-of-Load Synchronous Buck Converter for MB/NB/UMPC/VGA
- Networking DC-DC Power System
- Load Switch

TO252 Pin Configuration



Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-Ambient ¹	---	62	°C/W
$R_{\theta JC}$	Thermal Resistance Junction-Case ¹	---	5	°C/W

P-Ch 20V Fast Switching MOSFETs
Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0\text{V}$, $I_D=-250\mu\text{A}$	-20	---	---	V
$\Delta BV_{DSS}/\Delta T_J$	BV_{DSS} Temperature Coefficient	Reference to 25°C , $I_D=-1\text{mA}$	---	-0.014	---	$\text{V}/^\circ\text{C}$
$R_{DS(\text{ON})}$	Static Drain-Source On-Resistance ²	$V_{GS}=-4.5\text{V}$, $I_D=-15\text{A}$	---	42	52	$\text{m}\Omega$
		$V_{GS}=-2.5\text{V}$, $I_D=-10\text{A}$	---	67	85	
$V_{GS(\text{th})}$	Gate Threshold Voltage	$V_{GS}=V_{DS}$, $I_D=-250\mu\text{A}$	-0.5	-0.8	-1.2	V
$\Delta V_{GS(\text{th})}$	$V_{GS(\text{th})}$ Temperature Coefficient		---	3.95	---	$\text{mV}/^\circ\text{C}$
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=-16\text{V}$, $V_{GS}=0\text{V}$, $T_J=25^\circ\text{C}$	---	---	1	uA
		$V_{DS}=-16\text{V}$, $V_{GS}=0\text{V}$, $T_J=55^\circ\text{C}$	---	---	5	
I_{GSS}	Gate-Source Leakage Current	$V_{GS}=\pm 12\text{V}$, $V_{DS}=0\text{V}$	---	---	± 100	nA
g_{fs}	Forward Transconductance	$V_{DS}=-5\text{V}$, $I_D=-15\text{A}$	---	16.4	---	S
Q_g	Total Gate Charge (-4.5V)	$V_{DS}=-15\text{V}$, $V_{GS}=-4.5\text{V}$, $I_D=-15\text{A}$	---	11.1	15.5	nC
Q_{gs}	Gate-Source Charge		---	2.67	3.7	
Q_{gd}	Gate-Drain Charge		---	3.26	4.6	
$T_{d(on)}$	Turn-On Delay Time	$V_{DD}=-10\text{V}$, $V_{GS}=-4.5\text{V}$, $R_G=3.3\Omega$, $I_D=-15\text{A}$	---	5.2	10.4	ns
T_r	Rise Time		---	12.8	23	
$T_{d(off)}$	Turn-Off Delay Time		---	28.8	58	
T_f	Fall Time		---	16	32	
C_{iss}	Input Capacitance	$V_{DS}=-15\text{V}$, $V_{GS}=0\text{V}$, $f=1\text{MHz}$	---	857	1200	pF
C_{oss}	Output Capacitance		---	114	160	
C_{rss}	Reverse Transfer Capacitance		---	108	151	

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_s	Continuous Source Current ^{1,4}	$V_G=V_D=0\text{V}$, Force Current	---	---	-18.4	A
I_{SM}	Pulsed Source Current ^{2,4}		---	---	-50	A
V_{SD}	Diode Forward Voltage ²	$V_{GS}=0\text{V}$, $I_S=-1\text{A}$, $T_J=25^\circ\text{C}$	---	---	-1	V
t_{rr}	Reverse Recovery Time	$I_F=-15\text{A}$, $dI/dt=100\text{A}/\mu\text{s}$,	---	11.6	---	nS
Q_{rr}	Reverse Recovery Charge	$T_J=25^\circ\text{C}$	---	2.6	---	nC

Note :

- 1.The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.
- 2.The data tested by pulsed , pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$
- 3.The power dissipation is limited by 150°C junction temperature
- 4.The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.

Typical Characteristics

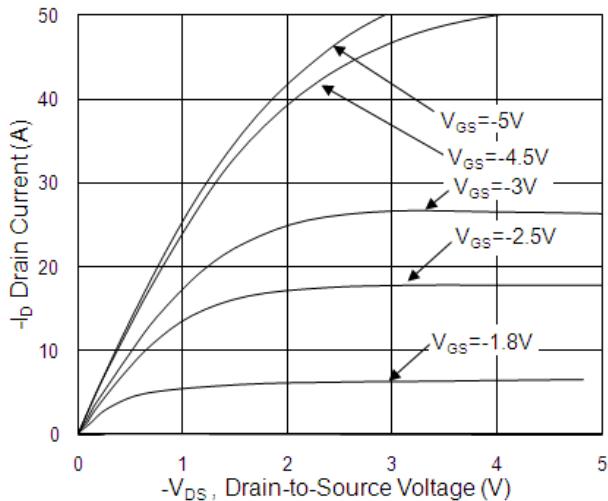


Fig.1 Typical Output Characteristics

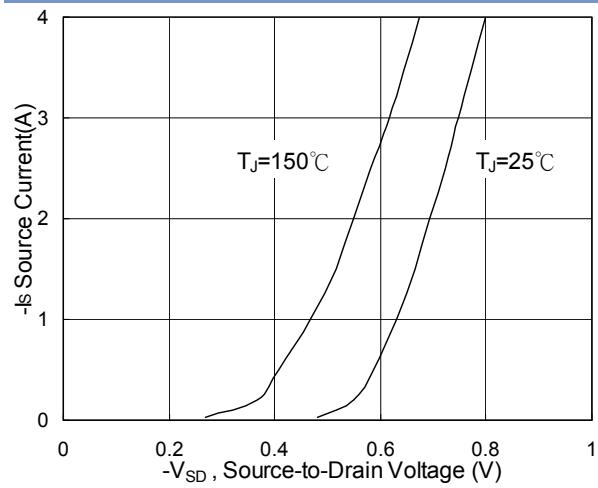


Fig.3 Forward Characteristics of Reverse

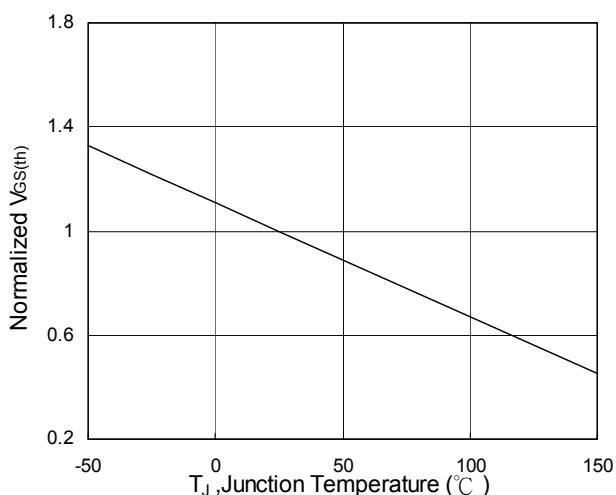


Fig.5 Normalized $V_{GS(\text{th})}$ vs. T_J

P-Ch 20V Fast Switching MOSFETs

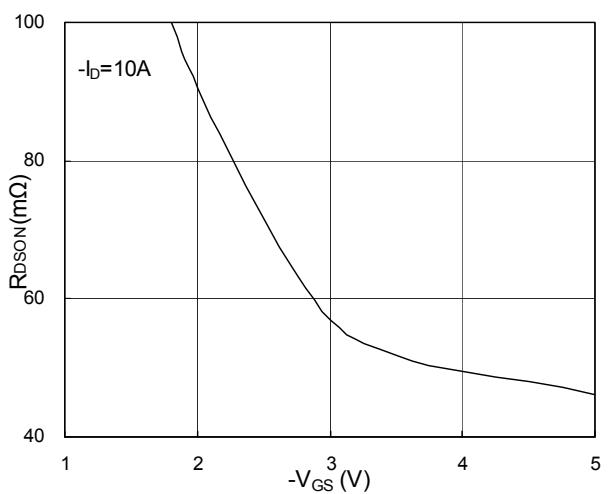


Fig.2 On-Resistance vs. G-S Voltage

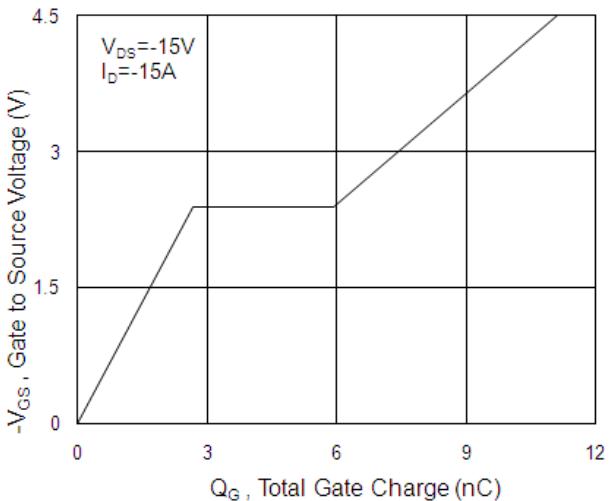


Fig.4 Gate-Charge Characteristics

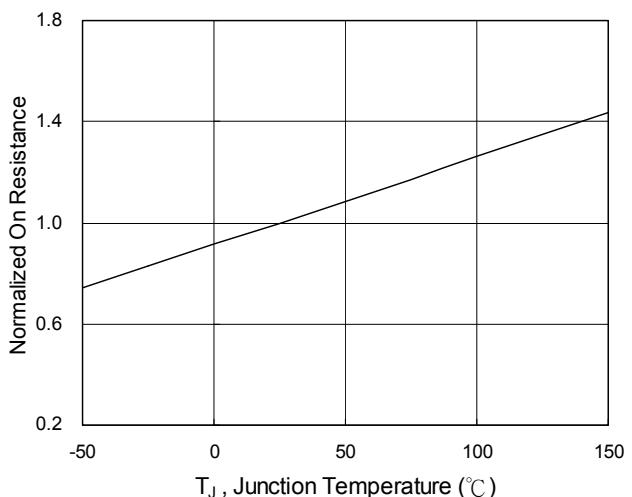
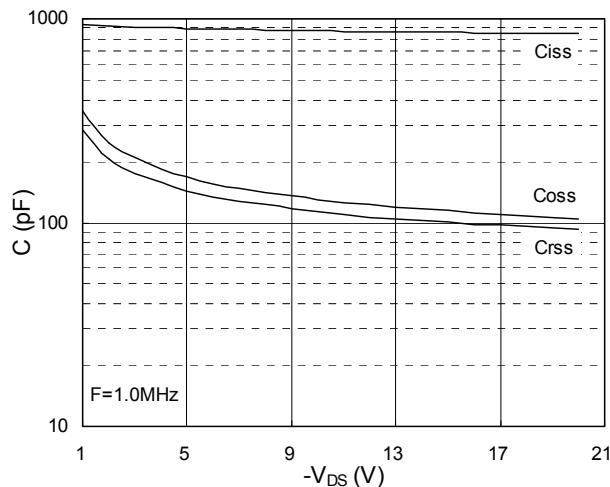
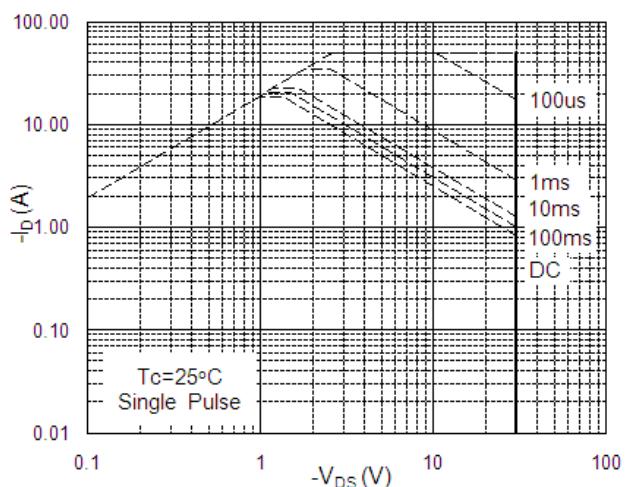
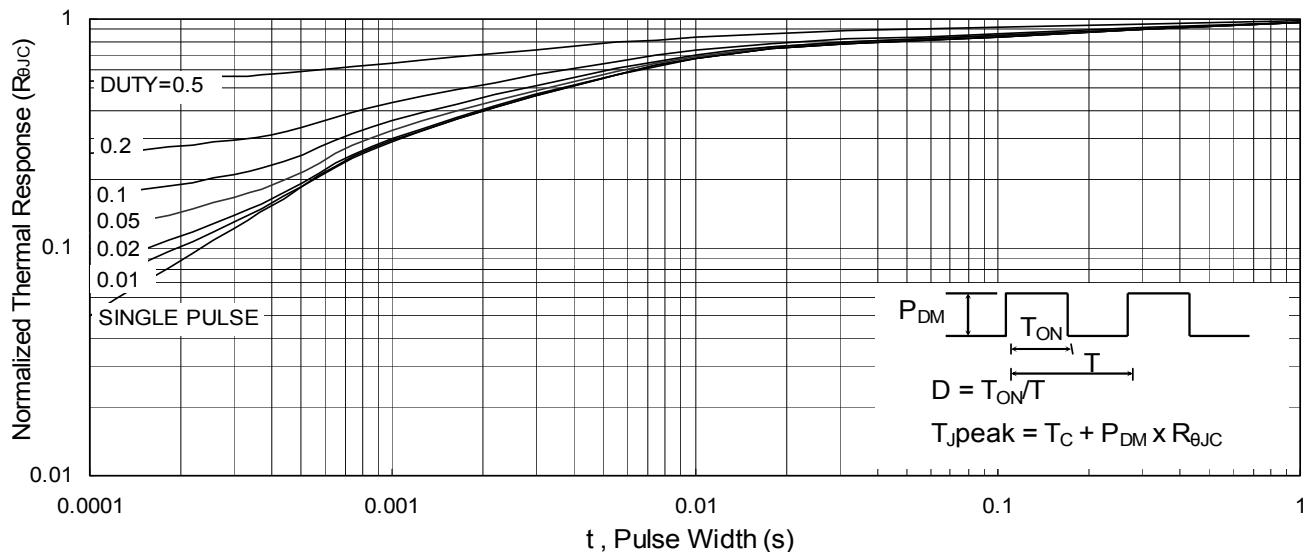
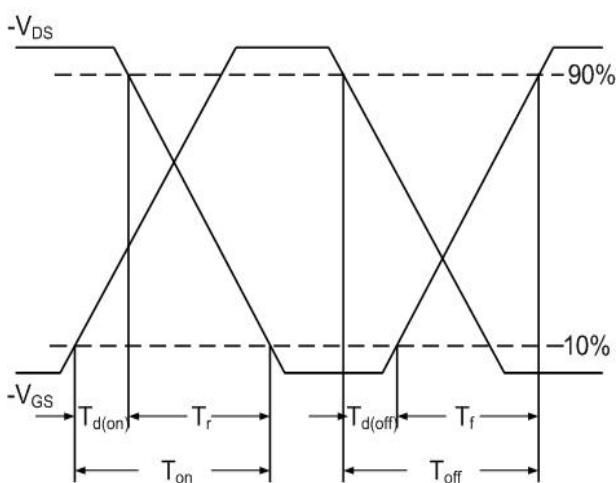
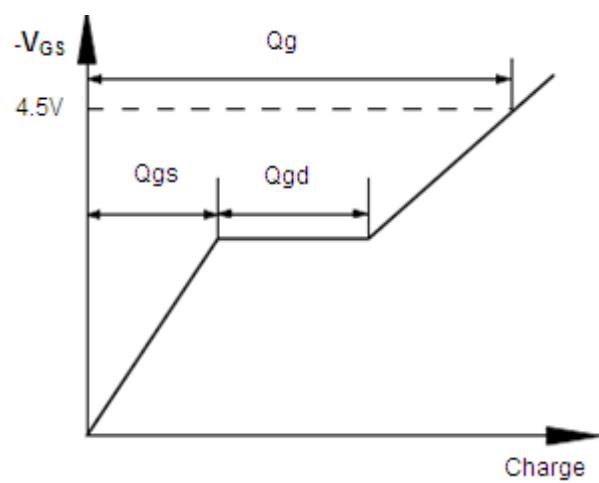


Fig.6 Normalized R_{DSON} vs. T_J

P-Ch 20V Fast Switching MOSFETs

Fig.7 Capacitance

Fig.8 Safe Operating Area

Fig.9 Normalized Maximum Transient Thermal Impedance

Fig.10 Switching Time Waveform

Fig.11 Gate Charge Waveform