

---

## Ultra Low Profile Notebook Keyboard (64Keys)

---

### FKB-7681 Series

#### ■ FEATURES

- 5.0mm in total height (including space key height), actually 4.7mm height and 1.5mm stroke
- Keys for Windows95®, Windows98®, Windows2000®, WindowsNT4.0®
- Excellent operation
  - Unique "Gear link" method offers comfortable key touch feeling combined with superior key-switch life.
  - 1.5mm keystroke, 50gf operating force, 20gf tactile response
  - Soft tactile feedback with a key pitch of only 12.8mm and a key size of 12.1mm.
- Various language versions are available through local laser based legend creation facility.
- High quality and reliability
- Laser printed keycaps meet environmental requirements.



- RoHS compliant since October 2005 production (serial number "UX00001" and thereafter)

First 2 digits of serial number consists of manufacturing year and month:

1st Digit: Manufacturing Year:

P=2000 / Q=2001 / R=2002 / S=2003 / T=2004 / U=2005 / V=2006 / W=2007 / X=2008 / Y=2009 / Z=2010

2nd Digit: Manufacturing Month:

1=January / 2=February / 3=March / 4=April / 5=May / 6=June / 7=July / 8=August / 9=September /

X=October / Y=November / Z=December

#### ■ MAIN APPLICATIONS

- Sub notebook type personal computer
- Personal digital assistants

# FKB-7681 Series

## ■ SPECIFICATION

Specification Item		Variants supported (80 pieces per box, 2560 per pallet)
Mechanical	Number of Keys	64 keys
	Key Switch type	Membrane switch
	Keytop	Rectangular cylindrical, step slope
	Operating Force	50gf. ± 25gf.
	Stroke	1.5mm±0.2m m
	Tactile	20gf. typ. soft
	Height	4.7mm (acatually 5.0mm including the space bar key)
	Size	190mm x 61.5m m
	Operating Life	2 M operations min.
Electrical	Interface	Matrix arrangement
	Contact Resistance	1K ohm max. at 5VDC
	Key Switch Bounce	10ms max.
Environment	Operating Temperature	0 to 40° C
	Storage Temperature	-20 to 60° C
	Humidity	90% RH max. at +40° C max. (inversely proportional change to 50% RH at 60° C)

# FKB-7681 Series


## ■ KEY MATRIX

Key Matrix with connections made from Right hand line to base. (No connects shown Light grey, based on characters on the example US international layout from previous page)

Here to Here ✓	X - 16	17	18	19	20	21	22
Y- 1	A00 (L-Ctrl)						
2				B00 (L-Shift)			
3	E00 (ESC)		D01 (Q)	E01 (1)	C00 (Caps)	C02 (S)	B03 (C)
4	B00` ( ` )		D00 (Tab)		B01 (Z)	C01 (A)	B02 (X)
5	A01 (L-Win)						
6	A02 (L-Alt)						
7		E04 (4)	D02 (W)	E03 (3)	A08 (AltGr)	C03 (D)	B04 (V)
8				B12 (R-Shift)			
9	E02 (2)	E05 (5)	D03 (E)	D05 (T)	A09 (Del)	C04 (F)	B05 (B)
10	E13 (BackSp)	A12 (←→)	D12 (I)	A11 (↓)	B11 (↑)	10 (←)	A05 (SpC)
11	E12 (=)	C12 (\)	D11 (l)	D13 (Enter)	C11 (')	B10 (/)	B09 (.)
12	E11 (-)	E08 (8)	D10 (P)	D08 (l)	C10 (:)	C07 (J)	B08 (,)
13	E10 (0)	E07 (7)	D09 (O)	D07 (U)	C09 (L)	C06 (H)	B07 (M)
14	E09 (9)	E06 (6)	D04 (R)	D06 (Y)	C08 (8)	C05 (G)	B06 (N)
15 - NC							

# FKB-7681 Series

## ■ DIMENSIONS

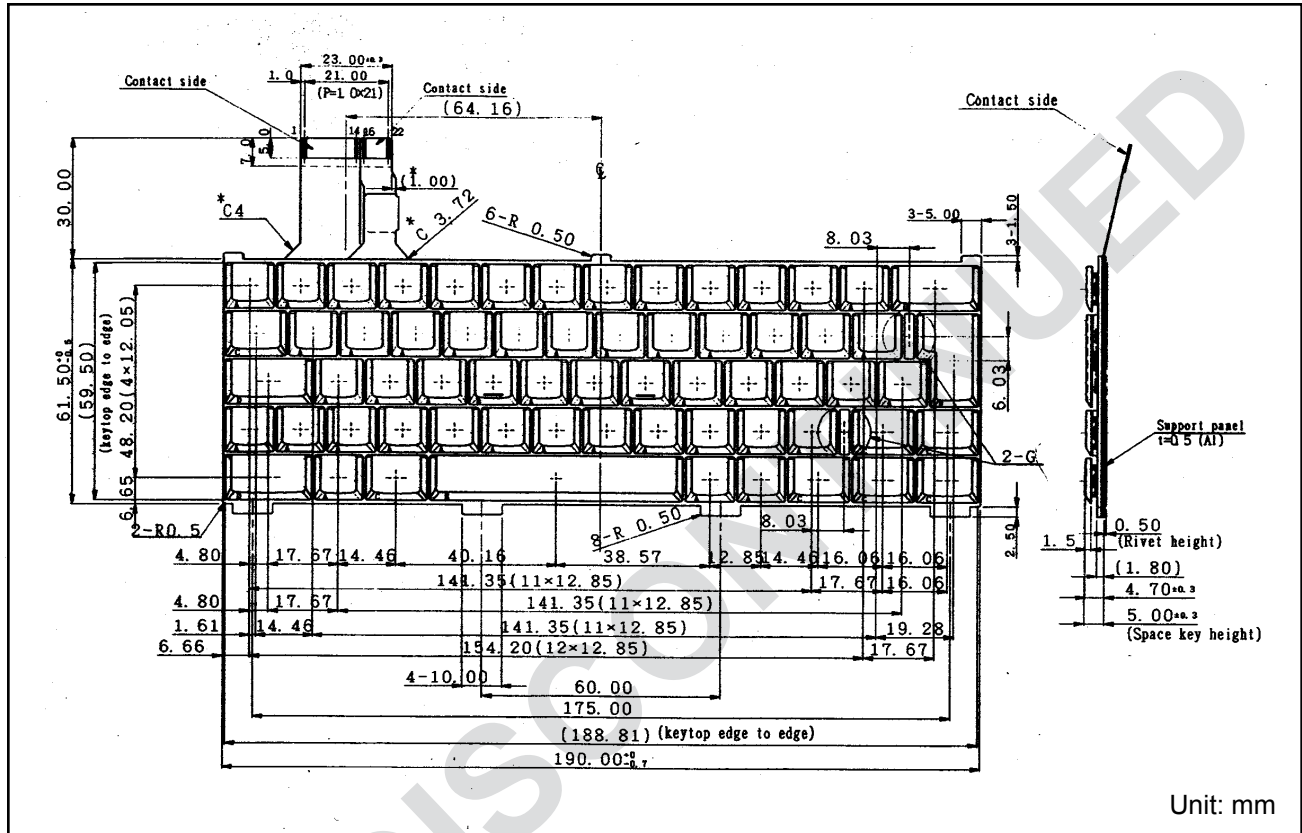

## Fujitsu Components International Headquarter Offices

### Japan

Fujitsu Component Limited  
 Gotanda-Chuo Building  
 3-5, Higashigotanda 2-chome, Shinagawa-ku  
 Tokyo 141, Japan  
 Tel: (81-3) 5449-7010  
 Fax: (81-3) 5449-2626  
 Email: [promothq@ft.ed.fujitsu.com](mailto:promothq@ft.ed.fujitsu.com)  
 Web: [www.fcl.fujitsu.com](http://www.fcl.fujitsu.com)

### North and South America

Fujitsu Components America, Inc.  
 250 E. Caribbean Drive  
 Sunnyvale, CA 94089 U.S.A.  
 Tel: (1-408) 745-4900  
 Fax: (1-408) 745-4970  
 Email: [components@us.fujitsu.com](mailto:components@us.fujitsu.com)  
 Web: <http://www.fujitsu.com/us/services/edevice/components/>

### Europe

Fujitsu Components Europe B.V.  
 Diamantlaan 25  
 2132 WV Hoofddorp  
 Netherlands  
 Tel: (31-23) 5560910  
 Fax: (31-23) 5560950  
 Email: [info@fceu.fujitsu.com](mailto:info@fceu.fujitsu.com)  
 Web: [emea.fujitsu.com/components/](http://emea.fujitsu.com/components/)

### Asia Pacific

Fujitsu Components Asia Ltd.  
 102E Pasir Panjang Road  
 #01-01 Citilink Warehouse Complex  
 Singapore 118529  
 Tel: (65) 6375-8560  
 Fax: (65) 6273-3021  
 Email: [fcal@fcal.fujitsu.com](mailto:fcal@fcal.fujitsu.com)  
 Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2007 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.  
 Rev. February 15, 2007.