


NOTES:

1. FOR USE WITH RG-58, 58A, 58C, 141 & 141A/C CABLE.
2. FOR CABLE TRIMMING USE KTJ-17 & KTD-77.
3. FOR FORMING USE CRIMP DIE SIZE 01.
4. FOR CABLING INSTRUCTIONS SEE CP-201A.

UNLESS OTHERWISE SPECIFIED:

- | | |
|--|---|
| <ol style="list-style-type: none"> 1. TOLERANCES: FRACTIONS ± .010 DECIMALS ± .004 ANGLES ± 0° 30' T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED THE SUM OF THEIR TOLERANCES. | <ol style="list-style-type: none"> 2. REMOVE ALL BURRS, BREAK SHARP EDGES .003 MAX. 3. NO FILLETS PERMITTED. 4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX. 5. ALL DIMENSIONS PRIOR TO PLATING. |
|--|---|

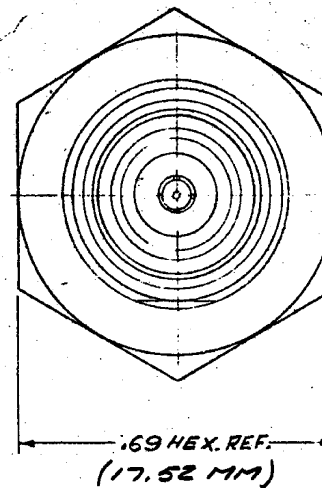

REVISIONS

ISSUE	CHANGES
1	CN 5093A 23 JUNE 67 HFE
2	CN 6325C 16 AUG 68 ANE
3	CN 11471A 10E 14 NOV 72
4	CN 12595A JL 15 AUG 73

KA-19-31

S-D

S-D

12	1	K-GRIP SLEEVE	N-59-29-2
11	1	BNC CONTACT F	1-544-12
10	1	INSULATOR	
9	1	HEX NUT	-492A-9
8	1	BUSHING	
7	1	LOCK WASHER	492A-12
6	1	K-GRIP	N-59-29-1
5	1	GASKET	704-6
4	1	GASKET	492A-10
3	1	GLAND	S-89-32-1
2	1	BODY	
1	1	CLAMP NUT	631-4
ITEM	REQ'D	DESCRIPTION	SW. NO.

REP:	
FINISH	
SPEC.	
MATL.	
SPEC.	
BULKHEAD JACK	
DRAWN JG.	DATE 12 JUN 67
APPR. PETEE	DATE 13 JUN 67
KINGS ELECTRONICS 40 MARBLEDALE ROAD TUCKAHOE, N. Y.	
KA-19-31	