


Common Mode Inductor

Parameter	Min.	Max.	Units
Inductance*	6.1		mH
DCR		0.75	Ω
Current		0.8	A _{RMS}
Leakage Inductance*		45	μ H
Interwinding capacitance		6	pF
SRF	350 kHz Typ.		



Rated Voltage 250 VAC
 Hipot (Isolation) 2000 VAC
 Insulation Resistance 100M Ω
 Temperature Rise 40°C Max.
 Operating Temperature Range -40°C to +80°C

*Inductance tested at 100mV_{RMS} and 100 kHz

Schematic Diagram
(Top View of part)

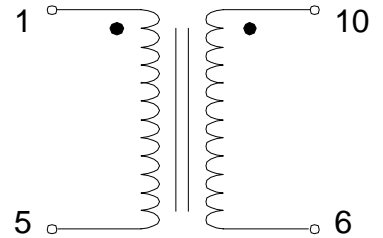


Physical Dimensions
inches (mm)

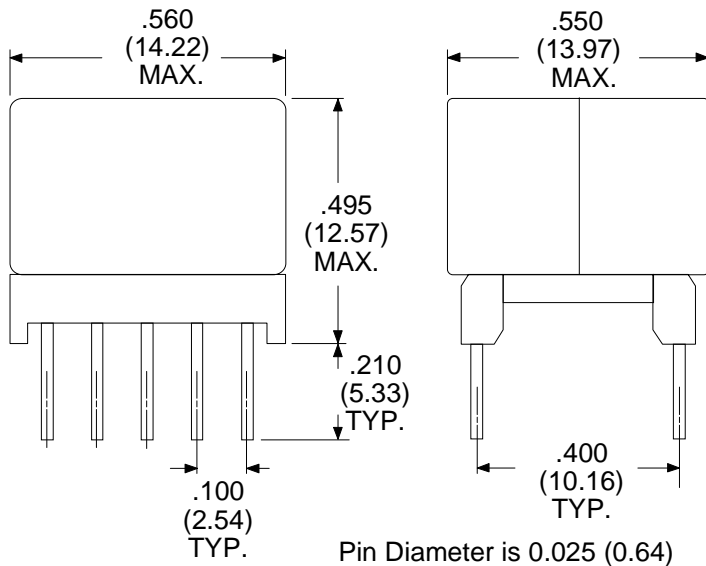

Foot Print

PIN POSITION GRID 0.100 (2.54)

● HOLES FOR BOBBIN PINS



RHOMBUS P/N: **L-536**

CUST P/N:

NAME:

DATE: **2/07/00**

SHEET: 1 OF 1