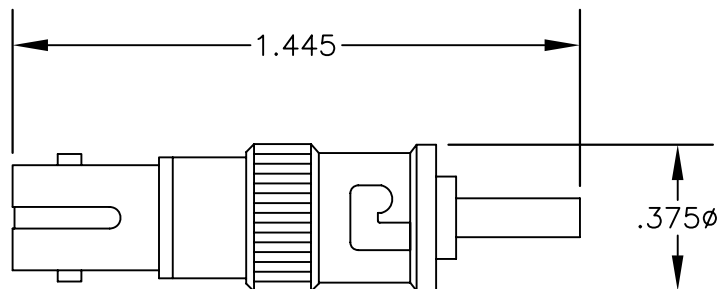


**MATERIALS**

<b>FERRULE</b>	<b>CERAMIC</b>
<b>SLEEVE</b>	<b>CERAMIC</b>
<b>HOUSING</b>	<b>METAL</b>

**SPECIFICATIONS**

Single Mode

PC Polish

Attenuation Value: 10dB  $\pm$ 10% Typical,  $\pm$ 15% Maximum

Operating Wavelength: 1300/1550 nm

Insertion Loss: &lt;0.3dB Typical, 1dB Maximum

Return Loss: 40 dB Minimum, &gt;50dB Typical

Operating Temperature: -40°C to +75°C

**PASTERNAK ENTERPRISES, INC.**P.O BOX 16759, IRVINE, CA 92623  
PHONE (949) 261-1920 FAX (949) 261-7451WEB ADDRESS: [www.pasternack.com](http://www.pasternack.com)  
E-MAIL ADDRESS: [sales@pasternack.com](mailto:sales@pasternack.com)**COAXIAL & FIBER OPTICS**

DWG TITLE

**PE700001-10**

DES. ST ATTENUATOR, SINGLE MODE

REV. B

**FSCM NO. 53919**

CAD FILE 050809

SCALE N/A

SIZE A

147

**NOTES:**

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES.