



1. Dimensions:

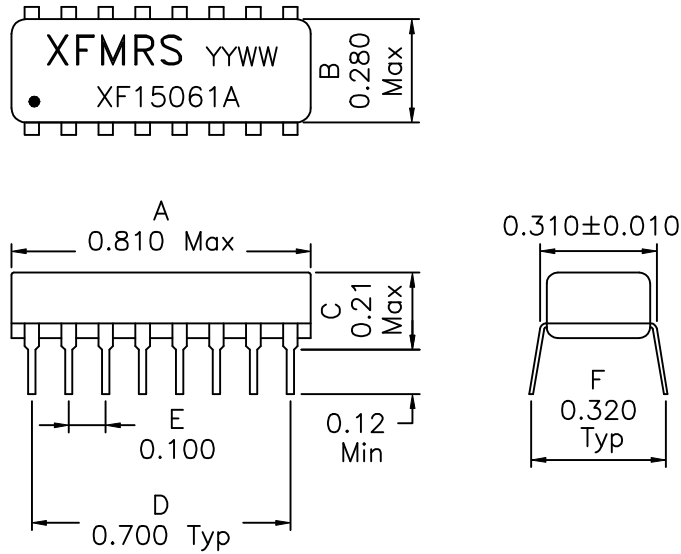

2. Schematic:

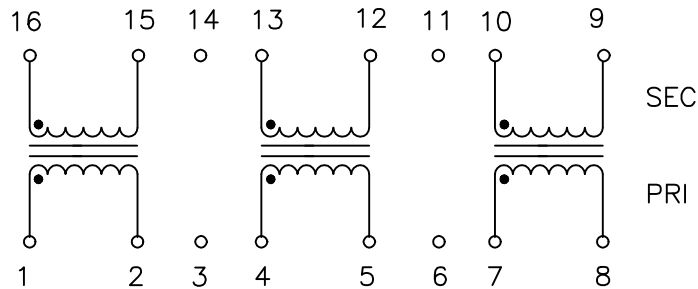

3. Electrical Specifications: @25°C

Isolation Voltage: 1500 Vrms (PRI to SEC)

Turns Ratio: 1:1 ±2% (PRI:SEC)

PRI OCL: 150uH ±20% @100KHz 50mV

Cw/w: 10pf Max. @100KHz 50mV (PRI/SEC)

PRI LL: 0.20uH Max. @100KHz 50mV (SEC Shorted)

DC Resistance: 0.25 Ohms Max.

ET Constant: 2.8 V-us Minimum

Rise Time: 3.0ns Maximum

DOC.REV B/1

XFMR5 Inc UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch SCALE 2.5:1 SHT 1 OF 1	Title: 10 BASE ISOLATION MAGNETICS	
	P/N: XF15061A	REV. B
	DWN. 廖玉坤	Sep-23-00
	CHK. 李清儿	Sep-23-00
APP. Joe Huff	Sep-23-00	