

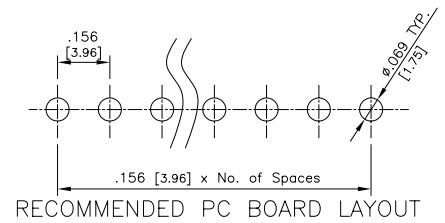


# Major League Electronics .156 cl Terminal Strip Header - Right Angle

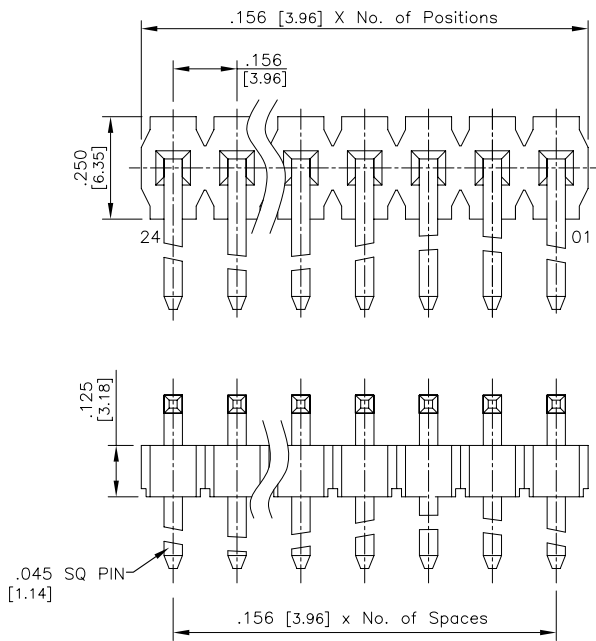

Tails may be clipped to achieve desired pin length

## Ordering Information

PC156HR  - S -  - T - LF

Pins Per Row  01 - 24  
 Row Specification S = Single Row  
 Lead Free

Plating Options	
T	Matte Tin All Over


Pin Options						
Post Length		Tail Length		R Dimension		
.144	3.66mm	.144	3.66mm	.113	2.87mm	02
.320	8.13mm	.175	4.45mm	.100	2.54mm	06
.423	10.75mm	.177	4.50mm	.246	6.30mm	10
.534	13.56mm	.156	3.96mm	.195	4.95mm	14

## Specifications

Current Rating: 7.9 Ampere  
 Insulation Resistance: 5000M $\Omega$  Min.  
 Dielectric Withstanding: 1500V AC/DC  
 Contact Resistance: 20 m $\Omega$  Max.  
 Operating Temperature: -55°C to + 105°C  
 Max. Process Temperature:  
 IR Reflow: 280°C up to 10 secs.  
 Wave: 250°C up to 10 secs.  
 Manual Solder: 380°C up to 5 secs.

## Materials

Contact Material: Brass  
 Insulator Material: LCP, UL94V-0  
 Plating: 120 $\mu$ " Matte Tin over 50 $\mu$ " (1,27) Ni



Mates with:  
 PC156S-XX-S-02  
 PC156S-XX-S-04

Products cut to specific sizes are uncancellable/nonreturnable

Parts are subject to change without notice

UNLESS OTHERWISE SPECIFIED  
 DIMENSIONS IN INCHES (MM)  
 TOLERANCES ARE:

NO PLACE DECIMALS  $\pm 0.35$   
 ONE PLACE DECIMALS  $\pm 0.30$   
 TWO PLACE DECIMALS  $\pm 0.25$   
 THREE PLACE DECIMALS  $\pm 0.12$

ANGLES  
 NO PLACE DECIMALS  $\pm 5.0'$   
 ONE PLACE DECIMALS  $\pm 3.5'$   
 TWO PLACE DECIMALS  $\pm 2.5'$   
 THREE PLACE DECIMALS  $\pm 1.5'$

PC156HR SERIES

.156cl Single Row - Right Angle  
 Thru Hole Terminal Strip Header

20 JUN 08

Scale  
 NTS



4235 Earnings Way, New Albany, Indiana, 47150, USA  
 1-800-782-3486 (USA/Canada/Mexico)  
 Tel: 812-944-7244  
 Fax: 812-944-7268  
 E-mail: mle@mlelectronics.com  
 Web: www.mlelectronics.com

Edition  
 1

Sheet  
 1/1