

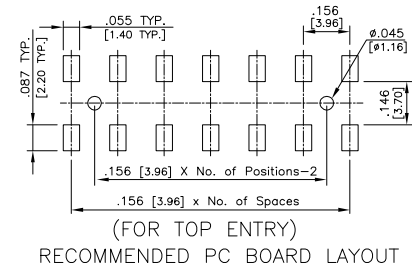
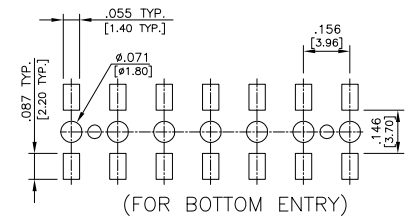


Major League Electronics .156 cl Surface Mount Socket Strip

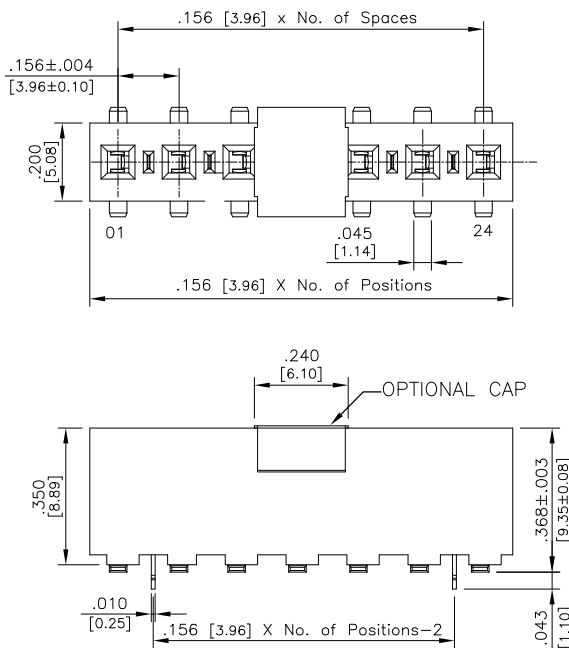

Ordering Information

PC156S XX - S - 04 - T - X - XX - X - LF

Pins Per Row
02 - 24

Row Specification
S = Single Row

Surface Mount
04

Plating Options	
Matte Tin All Over	T

Lead Free

Packing Information

TR-P = Tape and Reel with Pick and Place pad
TB-P = Tube with Pick and Place pad
TB-0 = Tube without Pick and Place pad
*If left blank, packaging at MLE's discretion
Pad may be metal, mylar or plastic*

Locking Clip


Leave blank if not needed
C = With

Specifications

Current Rating: 7.9 Ampere
Insulation Resistance: 5000MΩ Min.
Dielectric Withstanding: 1500V AC/DC
Contact Resistance: 30 mΩ Max.
Operating Temperature: -55°C to + 105°C
Max. Process Temperature:
IR Reflow: 280°C up to 10 secs.
Wave: 250°C up to 10 secs.
Manual Solder: 380°C up to 5 secs.

Materials

Contact Material: Phosphor Bronze
Insulator Material: LCP, UL94V-0
Plating: 100μ" Matte Tin over 50μ" (1.27) Ni

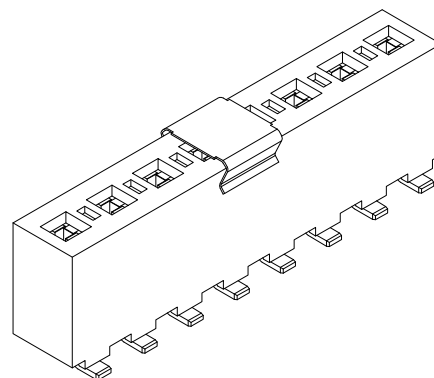

Mates with:
PC156H
PC156HR

Products cut to specific sizes are uncancellable/nonreturnable

Parts are subject to change without notice

UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES (MM)
TOLERANCES ARE:

NO PLACE DECIMALS ±0.30
ONE PLACE DECIMALS ±0.20
TWO PLACE DECIMALS ±0.15
THREE PLACE DECIMALS ±0.10

ANGLES

NO PLACE DECIMALS ±4.0°
ONE PLACE DECIMALS ±3.0°
TWO PLACE DECIMALS ±2.0°
THREE PLACE DECIMALS ±1.0°

PC156S-XX-S-04 SERIES

.156cl Single Row
Surface Mount Socket Strip

23 JUN 08

Scale
NTS



4235 Earnings Way, New Albany, Indiana, 47150, USA
1-800-782-3486 (USA/Canada/Mexico)
Tel: 812-944-7244
Fax: 812-944-7268
E-mail: mle@mlelectronics.com
Web: www.mlelectronics.com

Edition
1

Sheet
1/1