


2.00mm (.079") Pitch Board-In Connector Crimp Terminal

50034

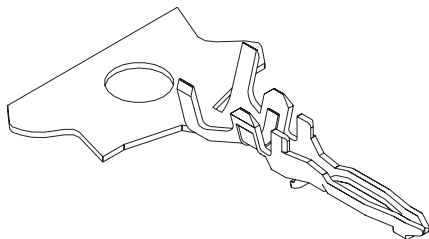

Order No.	Terminal	Lead-free
50034-8000	Reel	Yes
50034-8100	Bag	

Features and Benefits

- Locking tang secures terminal to housing

Reference Information

Packaging: Reel or bag

Use With: 51015

Designed In: Millimeters

Electrical

Voltage: 125V

Current:

AWG	26	28	30
	2.0A	1.5A	1.0A

Contact Resistance: 5 milliohms max.

Dielectric Withstanding Voltage: 500V AC/1 min.

Insulation Resistance: 1000 Megohms min.

Physical

Contact: Phosphor Bronze

Plating: Tin

Operating Temperature: -40 to +105°C

Wire Range: 26 to 30 AWG


Insulation Range: 1.40mm dia. max.

Strip Length: 1.40 to 1.90mm

www.molex.com/product/board_in.html

2.00mm (.079") Pitch Board-In Connector Housing

51015



Features and Benefits

- Sizes 2 to 15 circuits
- Low profile of 3.8mm
- Locking windows secure terminal to housing

Reference Information

Packaging: Bag

Use With: 50034

Designed In: Millimeters

Electrical

Voltage: 125V

Current:

AWG	26	28	30
	2.0A	1.5A	1.0A

Dielectric Withstanding Voltage: 500V AC

Insulation Resistance: 1000 Megohms min.

Physical

Housing: PBTP, UL 94V-0

Operating Temperature: -40 to +105°C

Circuits	Order No.
2	51015-0200
3	51015-0300
4	51015-0400
5	51015-0500
6	51015-0600
7	51015-0700
8	51015-0800

Circuits	Order No.
9	51015-0900
10	51015-1000
11	51015-1100
12	51015-1200
13	51015-1300
14	51015-1400
15	51015-1500