


DASH NO.	DESCRIPTION	MADE FROM
----------	-------------	-----------

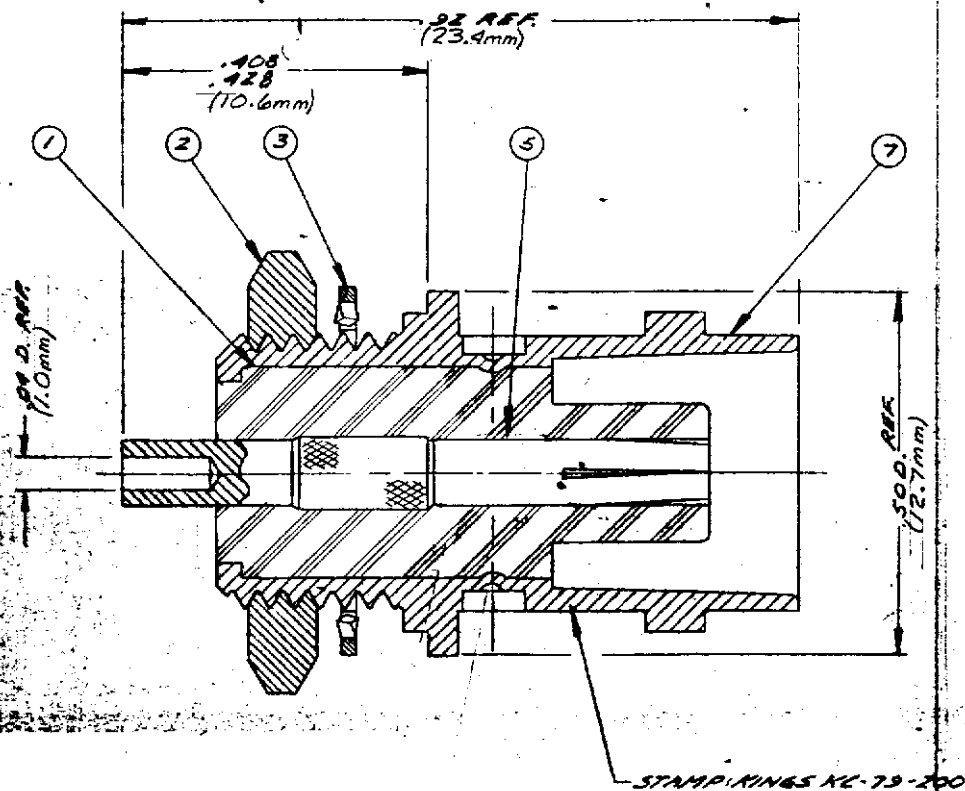


STAMP RINGS KC-79-200

NOTES:


2. FOR USE WITH .185 MAX. PANEL.

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 3 PLACE DECIMALS & .010 ANGLES & 9° 30'
2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.



MOUNTING HOLE

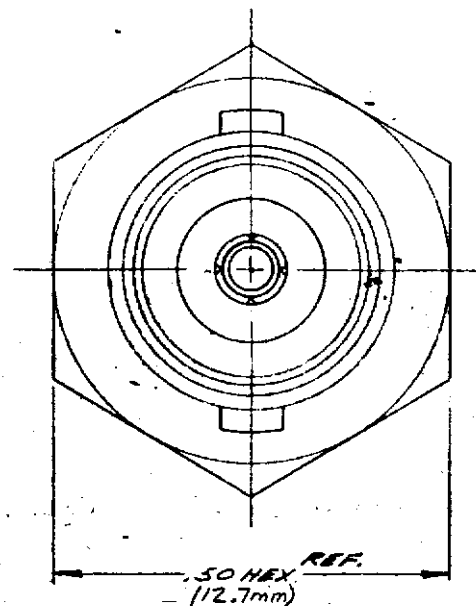

S-D

REVISIONS	
ISSUE	CHANGES
0	ER 14/75 HJB 3 FEB 75
1	CN 27676 C EAJ 24 MAR 86
2	CN 30287 C M.Z.B. 16 NOV. 88

S-D

USED ON:

REF: UNITED DETECTOR
8100-1023-2 C

FINISH

SPEC.

MATL.

SPEC.

BNC RECEPTACLE

DRAWN HJB DATE 3 FEB 75

APPD JCL DATE 3-4-75

KINGS ELECTRONICS
40 HAWTHORNE ROAD
TUCUMCUM, N. Y. 13797

KC-79-200 S-D

ITEM	QTY	DESCRIPTION	PART NO.
7	1	BODY	
5	1	BNC CONTACT P	
3	1	WASHER	C-71-02-7-M06
2	1	HEX NUT	706-4-M06
1	1	INSULATOR	