


MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.




CIRCUIT


NOTES:

MATERIALS:


- BUSHING - TIN PLATED STEEL
- LEAD - SOLDER PLATED COPPER
- NUT - TIN PLATED BRASS
- L"WASHER - TIN PLATED PHOSPHOR BRONZE
- MOUNTING TORQUE: 8 lb - ins. max
- SEAL TESTED PER MIL-STD-202 METHOD 112 CONDITION A.
- DCR - .01Ω max.
- MAX. SOLDER TEMPERATURE 500°F

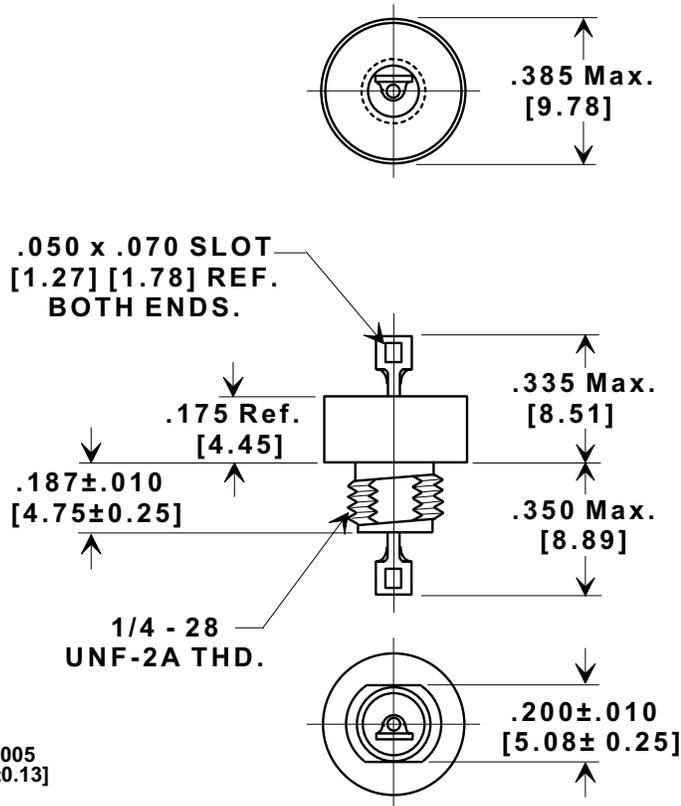

MOUNTING HARDWARE

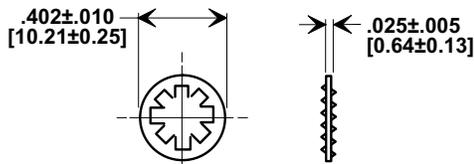

LOCK WASHER

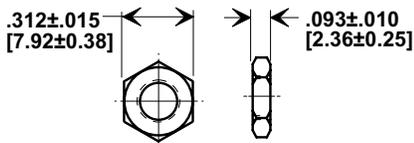

HEX NUT

MIN. CAP (UF)	WORKING VOLTAGE D.C.		CURRENT DC (AMPS).	MIN. NO LOAD INSERTION LOSS (dB) @ 25°C PER MIL-STD-220					
	85°C	125°C		30KHz	100KHz	300KHz	1MHz	10MHz	1GHz
1.0 ±10%	---	100	15	9	20	29	39	52	70

X-2015 Rev-0	REVISION RECORD	0
	Original Release	940603-3
	C.O.	

--TOLERANCES-- Unless Otherwise Specified	Title COAXIAL BROADBAND - "C" HERMETICALLY SEALED	
DECIMAL ±	Drawn E.C. 06-10-94	
ANGLES ±	Approved B.Mc. 06-10-94	
TUSONIX TUCSON, ARIZONA	A	4601-011