

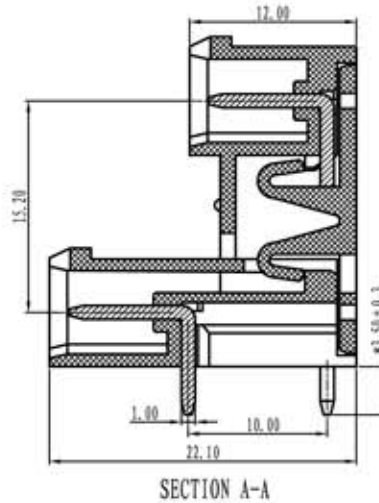


euro-block

product specification

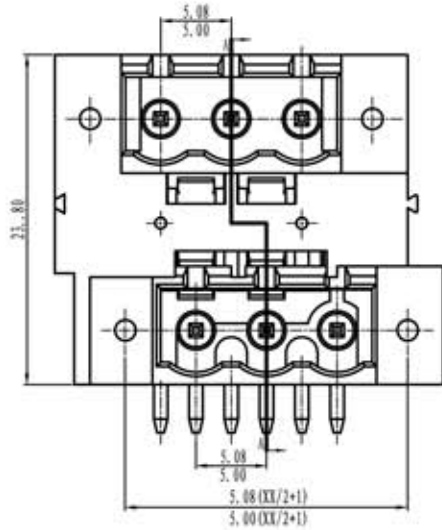

Electrical

Standard: UL-IEC
 Rated voltage: 300V-320V
 Rated current: 15A-20A
 Contact resistance: 20m Ω
 Insulation resistance: 500M Ω/DC500V
 Withstanding voltage: AC2000V/1Min

Mechanical

Temp.Range: -40°C~+105°C
 MAX soldering: +250°C for 5 sec

Dimensions

Pitch: 5.08mm-5.00mm
 Poles: 2p-xxp

Material

Housing: PA66, UL94V-0
 Pin header: Brass, Tin plated

Schema generale del codice di ordinazione / General description of ordering code



TOLERANCES EXCEPT AS NOTED

variable range	linear dimension				fillet	chamfer	short angle sid			≡	-	□	//	⊥		
	to 6	over 6 to 30	over 30 to 120	over 120 to 480	all to 0.2	to 6 to 0.5	to 10 to 1	to 10 to 30'	to 50 to 20'	to 120 to 10'	all to 0.5	to 5 to 0.025	to 30 to 0.06	to 120 to 0.12	to 0.4	
tolerance	±0.1	±0.2	±0.3	±0.5	±0.2	±0.5	±1	1'	30'	20'	10'	0.5	0.025	0.06	0.12	0.4

UNITS	mm	SIZE	A4	SCALE	FIRST ANGLE PROJECTION	
					NAME	CMD-HF