



This is a sample photo.

Order symbol		PC 100/100 HG
EI. number		EAN-code 6418074022059
Sweden		
Denmark		
Finland		3420313

Including

Enclosure cover with cover screws, body with mounting screws and gasket.


Product Properties

USA: UL Type 1,4, 4X, 6

EURO: IP 66/67 (EN60529); IK 08 (EN 50102)

MNX PC

In the corners of these the areas we have radius 2.0 mm in all sizes.
The higher/deeper the cover is, the smaller the recess in the cover.

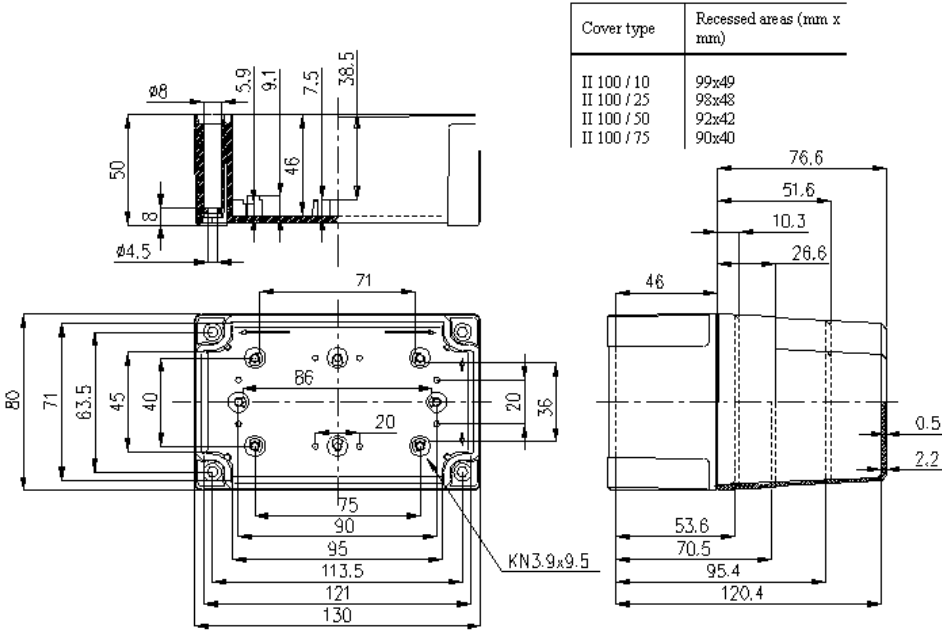

Cover type	Recessed areas (mm x mm)
II 100 / 10	99x49
II 100 / 25	98x48
II 100 / 50	92x42
II 100 / 75	90x40

Technical Information of Product Group

Standard colour:	RAL 7035	Temp. range-in cont. use:	Max. +80 °C
Flame resistance:	UL94-5V (UL 746 C 5)	Temp. range-of material:	- 40 °C - + 120 °C

Accessories

Sealing bushing	DP 14553
Cover screw head	MB 14552
Condensation water plug	MB 12189
Mounting screw	KN 3.9x9.5
Ventilation device	MB 10631
Inspection window	L 02
Cover screw	SS 14550L
Mounting plate	MIV 100
Swing door kit	HFP 130
DIN-Rail	MIV 10
DIN-Rail	MIV 5
DIN-Rail	MIN 10
DIN-Rail	MIN 5
Front plate	FP A 100/130
Hinge	TH A