


features


- PSO is made completely moisture preventive to be PSN that can be used under high moisture environment
- PN is a non-inductive type and can be used for high frequency
- PWW resistors, which are non-inductive wirewound resistors for high voltage with resistance wires wound on insulation pipes
- PAP resistors are non-inductive wirewound resistors with inductance less than PWW, can be used for pulse wave measurement, impulse generators, etc. and have the same dimensions as PWW resistors

dimensions and construction


PSN • PV



PN, PWW, PAP



PSO



Size Code	Dimensions (mm)			Weight (g)
	L	D±0.5	H (Nominal)	
PSN-0.5	50±2	17.5	10	20
PSN-1	100±2			30
PSN-2	200±2	24	15	85
PSN-3	300±2	33	20	250
PSN-4	400±3	45		600
PSN-5	500±3	62	25	800
PSN-6	1000±5			1350
PV-0.5	80±2	9.5	8	12
PV-1	150±2			
PV-2		17.5	10	45
PV-5	250±2	24	15	105
PV-8		33	20	220
PSO-0.5	55±5	28	10	120
PSO-1	105±5			150
PSO-2	205±5	38		370

Size Code	Dimensions (mm)			Weight (g)
	L	D±0.5	H (Nominal)	
PSO-3	320±5	46	20	760
PSO-4	420±5	65		1900
PSO-5	530±5	80	25	3500
PSO-6	1050±5		8	6200
PN-0.5	50±2	17	12	25
PN-1	100±2			55
PN-2	200±2			80
PN-3	300±2			100
PN-4	400±2	62	25	125
PWW-3, PAP-3	300±2			310 • 250
PWW-4, PAP-4	400±3			660 • 510
PWW-5, PAP-5	500±3			1330 • 960
PWW-6, PAP-6	1000±5			2700 • 1850

ordering information

PSN RoHS

PSN	0.5	CP	F	A	105	J
Product Code	Power Rating	Cap	RoHS	Holder	Nominal Resistance	Resistance Tolerance
	0.5 : 2W 1 : 5W 2 : 10W 3 : 25W 4 : 50W 5 : 125W 6 : 250W	C M MS CP		Nil: No Holder A B	3 digits	J : ±5% K : ±10% M : ±20%

PSO RoHS

PSO	0.5	C	F	105	J
Product Code	Power Rating	Cap	RoHS	Nominal Resistance	Resistance Tolerance
	0.5 : 1.5W 1 : 4W 2 : 8W 3 : 20W 4 : 40W 5 : 100W 6 : 200W	C		3 digits	J : ±5% K : ±10% M : ±20%

ordering information

PV RoHS

PV	0.5	CP	F	A	105	J
Product Code	Power Rating	Cap	RoHS	Holder	Nominal Resistance	Resistance Tolerance
	0.5 : 2W 1 : 4W 2 : 7W 5 : 12W 8 : 20W	C M CP		Nil: No Holder A B	3 digits	J : ±5% K : ±10% M : ±20%

PN RoHS

PN	0.5	CP	F	105	J
Product Code	Power Rating	Cap	RoHS	Nominal Resistance	Resistance Tolerance
	0.5 : 1.5W 1 : 3W 2 : 6W 3 : 9W 4 : 12W	C M CP		3 digits	J : ±5% K : ±10% M : ±20%

PWW, PAP RoHS


PWW	3	M	F	A	102	J
Product Code	Power Rating	Cap	RoHS	Holder	Nominal Resistance	Resistance Tolerance
PWW PAP	3 : 25W 4 : 50W 5 : 100W 6 : 200W	M		Nil: No Holder A B	3 digits	J : ±5% K : ±10% M : ±20%

applications and ratings


Part Designation	Power Rating (W)	Resistance Range (Ω) J: ±5% K: ±10% M: ±20% (E24)	T.C.R. (x10 ⁻⁶ /K)	Maximum Working Voltage	Impulse Withstand Voltage	Energy Rating 1 time/ 5 min.	Operating Temperature Range	Inductance (μH) Maximum
PSN-0.5	2	500~500M	±1500: +25°C/-15°C ±1000: +25°C/+85°C (R<1GΩ)	15kV	20kV	50J	-30°C~+125°C	—
PSN-1	5	1k~1G		30kV	40kV	125J		
PSN-2	10	2k~2G		60kV	80kV	400J		
PSN-3	25	3k~3G		90kV	120kV	1.8kJ		
PSN-4	50	4k~4G		120kV	160kV	4.0kJ		
PSN-5	125	5k~5G		150kV	200kV	9.0kJ		
PSN-6	250	6k~6G		300kV	400kV	20.0kJ		
PV-0.5	2	500~500M		24kV	32kV	45J		
PV-1	4	1k~1G		45kV	60kV	90J		
PV-2	7	1.5k~1.5G				270J		
PV-5	12	2.5k~2.5G		75kV	100kV	650J		
PV-8	20	2.5k~2.5G				950J		
PSO-0.5	1.5	500~500M	±3000 (R≥1GΩ)	15kV	20kV	40J	-15°C~+60°C	
PSO-1	4	1k~1G		30kV	40kV	100J		
PSO-2	8	2k~2G		60kV	80kV	320J		
PSO-3	20	3k~3G		90kV	120kV	1.5kJ		
PSO-4	40	4k~4G		120kV	160kV	3.2kJ		
PSO-5	100	5k~5G		150kV	200kV	7.2kJ		
PSO-6	200	6k~6G		300kV	400kV	16.0kJ		
PN-0.5	1.5	50~500k		—	20kV	35J		
PN-1	3	100~1M		—	40kV	70J		
PN-2	6	200~2M		—	80kV	130J		
PN-3	9	300~3M		—	120kV	200J		
PN-4	12	400~4M		—	160kV	270J		
PWW-3	25	10~800	±200	—	120kV	2kJ~5kJ	-30°C~+125°C	20
PAP-3		10~400				4kJ~12kJ		3
PWW-4	50	15~1500			160kV	7kJ~20kJ		35
PAP-4		10~800				14kJ~40kJ		6
PWW-5	100	25~2500			200kV	1kJ~2kJ		70
PAP-5		15~1000				1.5kJ~4kJ		12
PWW-6	200	50~5000				3.5kJ~10kJ		150
PAP-6		25~2000				7kJ~25kJ		25

environmental applications

Derating Curve

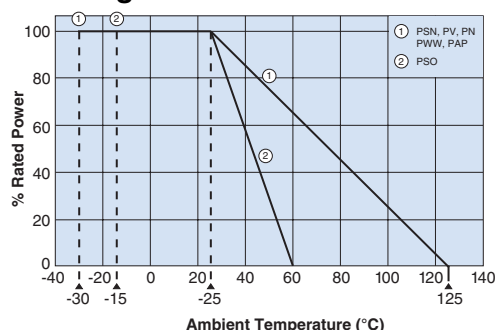

Holder Dimensions (mm)

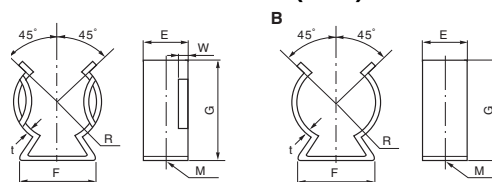






Type	R	E	F	G	M	t	W
PSN-0.5, PSN-1, PV-2	8.5	11	16	24	ø4.2	0.8	1.5±0.5
PSN-2, PV-5	11.5	15	18	32		1.0	1.5±1.0
PSN-3, PV-8	16	18	24	40		1.5	2.0±1.0
PSN-4	22	20	36	59	ø6.5	1.5	
PSN-5, PSN-6	30	25	46	74		1.5	

(PWW, PAP: Please contact factory for details)

Performance Characteristics

Parameter	Requirements $\Delta R\pm\%$	Test Method
Resistance	Within specified tolerance	25°C
T.C.R.	Within specified T.C.R.	R<1GΩ: PSN: $\pm 1500 : +25^\circ\text{C}/-15^\circ\text{C}$ PSN: $\pm 1000 : +25^\circ\text{C}/+85^\circ\text{C}$ R≥1GΩ: PSN: $\pm 3000 : +25^\circ\text{C}/-15^\circ\text{C}, +25^\circ\text{C}/+85^\circ\text{C}$
Rapid Change of Temperature	5%	-30°C (30 minutes)/+85°C (30 minutes) 5 cycles Except for PSN
Voltage Characteristics	3%	Rated voltage or max. working voltage, whichever is lower and 1/10 of its voltage
Moisture Resistance	5% : R<100MΩ 10% : R≥100MΩ	40°C, 90%~95%RH, 250 hours
Endurance at 25°C	5% : R<100MΩ 10% : R≥100MΩ	25°C, 500 hours 25°C, 500 hours, Continuous load

Cap Dimensions (mm)

Cap Shape																
Type	D	d	D	M	K	A	D	M	K	A	d	ℓ	D	M	ℓ ₁	ℓ ₂
PSN-05;PSN-1;PV-2	17.5	7	17.5	3	2	7	—	—	—	—	1.0	90	—	—	—	—
PSN-2;PV-5	24	12	24	4	2	10	—	—	—	—	1.2	120	—	—	—	—
PSN-3;PV-8,PWW-3;PAP-3	33	14	33	5	4	14	—	—	—	—	—	—	—	—	—	—
PSN-4;PWW-4;PAP-4	—	—	45	6	4	16	45	8	4	16	—	—	—	—	—	—
PSN-5,6;PWW-5,6;PAP-5,6	—	—	62	8	7	26	62	10	7	37	—	—	—	—	—	—
PV-0.5;PV-1	9.5	Without hole	—	—	—	—	—	—	—	—	0.9	90	—	—	—	—
PN-0.5	17	Without hole	—	—	—	—	—	—	—	—	1.0	90	—	—	—	—
PN-1	—	—	17	4	—	—	—	—	—	—	1.0	90	—	—	—	—
PN-2-PN-4	—	—	17	4	—	—	—	—	—	—	1.2	120	—	—	—	—
PSO-05,1	—	—	—	—	—	—	—	—	—	—	—	—	28	4	8	—
PSO-2	—	—	—	—	—	—	—	—	—	—	—	—	38	6	10	—
PSO-3	—	—	—	—	—	—	—	—	—	—	—	—	46	8	—	15
PSO-4	—	—	—	—	—	—	—	—	—	—	—	—	65	10	—	20
PSO-5,6	—	—	—	—	—	—	—	—	—	—	—	—	80	12	—	25