

**MXH SERIES**

**105°C Ultra Miniaturized, Snap-in Terminal Type**

**◆FEATURES**

- Load Life : 105°C 2000 hours.
- Smaller size than MXG series.
- RoHS compliance.



**◆SPECIFICATIONS**

Items	Characteristics						
Category Temperature Range	-25~+105°C						
Rated Voltage Range	400, 420, 450V.DC						
Capacitance Tolerance	±20% (20°C, 120Hz)						
Leakage Current(MAX)	$I=3\sqrt{CV}$ (After 5 minutes application of rated voltage) $I=(\mu A)$ Leakage Current $C=(\mu F)$ Rated Capacitance $V=(V)$ Rated Voltage						
(tanδ) Dissipation Factor(MAX)	<table border="1"> <tr> <td>Rated Voltage</td> <td>400~450</td> <td>(20°C, 120Hz)</td> </tr> <tr> <td>tanδ</td> <td>0.20</td> <td></td> </tr> </table>	Rated Voltage	400~450	(20°C, 120Hz)	tanδ	0.20	
Rated Voltage	400~450	(20°C, 120Hz)					
tanδ	0.20						
Endurance	After applying rated voltage with rated ripple current for 2000 hours at 105°C, the capacitors shall meet the following requirements. <table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±20% of the initial value.</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the specified value.</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> </table>	Capacitance Change	Within ±20% of the initial value.	Dissipation Factor	Not more than 200% of the specified value.	Leakage Current	Not more than the specified value.
Capacitance Change	Within ±20% of the initial value.						
Dissipation Factor	Not more than 200% of the specified value.						
Leakage Current	Not more than the specified value.						
Low Temperature Stability Impedance Ration(MAX)	<table border="1"> <tr> <td>Rated Voltage</td> <td>400~450</td> <td>(120Hz)</td> </tr> <tr> <td>Z(-25°C) / Z(20°C)</td> <td>8</td> <td></td> </tr> </table>	Rated Voltage	400~450	(120Hz)	Z(-25°C) / Z(20°C)	8	
Rated Voltage	400~450	(120Hz)					
Z(-25°C) / Z(20°C)	8						

**◆MULTIPLIER FOR RIPPLE CURRENT**

Frequency Coefficient

(Hz) Frequency	60(50)	120	500	1k	10k≤
Coefficient	0.80	1.00	1.20	1.25	1.40

**◆PART NUMBER**


□□□ / **MXH** / □□□□□ / **M** / □□□ / **SN** / **DXL**  
 Rated Voltage      Series      Rated Capacitance      Capacitance Tolerance      Option      Terminal Code      Case Size

**◆OPTION**

	Code
PET Sleeve without plate	EFC

**◆DIMENSIONS**

(mm)

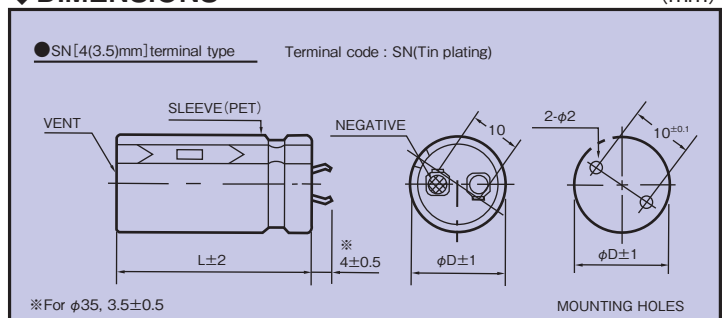

**◆ STANDARD SIZE**

Cap ( $\mu$ F)	wV		400							
	$\phi$ D		$\phi$ 22	$\phi$ 25		$\phi$ 30		$\phi$ 35		
120			22×25	0.75						
150			22×30	0.88						
180			22×30	0.95	25×25	0.95				
220			22×35	1.10	25×30	1.10				
270			22×40	1.22	25×35	1.22	30×25	1.22		
330			22×50	1.44	25×40	1.44	30×30	1.44	35×25	1.44
390					25×45	1.55	30×35	1.55	35×30	1.55
470					25×50	1.68	30×40	1.68	35×30	1.68
560							30×45	1.90	35×35	1.90
680							30×50	2.12	35×40	2.12
820									35×45	2.30

Cap ( $\mu$ F)	wV		420							
	$\phi$ D		$\phi$ 22	$\phi$ 25		$\phi$ 30		$\phi$ 35		
100			22×25	0.66						
120			22×30	0.81						
150			22×30	0.84	25×25	0.84				
180			22×35	0.91	25×30	0.91				
220			22×40	1.05	25×30	1.05	30×25	1.05		
270			22×50	1.25	25×35	1.25	30×30	1.25	35×25	1.25
330					25×45	1.42	30×35	1.42	35×30	1.42
390					25×50	1.61	30×40	1.61	35×30	1.61
470							30×45	1.86	35×35	1.86
560							30×50	2.10	35×40	2.10
680									35×45	2.20

Cap ( $\mu$ F)	wV		450							
	$\phi$ D		$\phi$ 22	$\phi$ 25		$\phi$ 30		$\phi$ 35		
100			22×25	0.69						
120			22×30	0.72	25×25	0.72				
150			22×35	0.79	25×30	0.79				
180			22×40	0.87	25×30	0.87	30×25	0.87		
220			22×45	1.05	25×35	1.05	30×30	1.05		
270			22×50	1.23	25×40	1.23	30×30	1.23	35×25	1.23
330					25×50	1.38	30×35	1.38	35×30	1.38
390							30×40	1.61	35×35	1.61
470							30×45	1.78	35×40	1.78
560									35×45	1.99
680									35×50	2.10

↑  
Ripple Current (A r.m.s./120Hz, 105°C)

↑  
Case Size  $\phi$ D×L(mm)