


DASH NO. M CODE MADE FROM

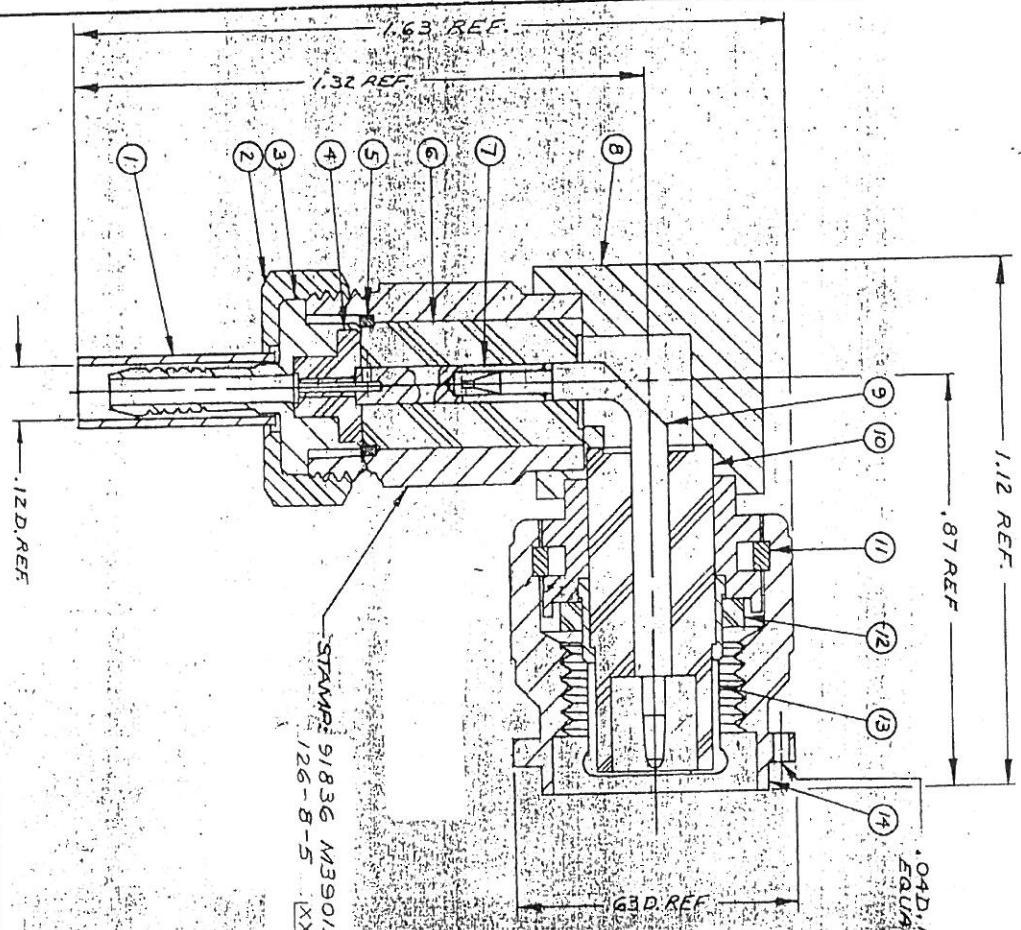

UNLESS OTHERWISE SPECIFIED:  
 1. TOLERANCES: FRACTIONS & PLACE DECIMALS & .000  
 3 PLACE DECIMALS \* ONLY OF ANY 2 DIAMETERS MAY  
 1.1, 1.4, 1.6, 1.8, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0, 10.0, 12.0, 15.0, 20.0, 25.0, 30.0, 40.0, 50.0, 60.0, 80.0, 100.0  
 NOT EXCEED THE SUM OF THEIR TOLERANCES.

2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.  
 3. NO FILLETS PERMITTED.  
 4. SURFACE ROUGHNESS 63 MICRONS INCHES RMS MAX.  
 5. ALL DIMENSIONS PRIOR TO PLATING.  
 6. ALL PLATING IN ACCORDANCE WITH MIL 10004.

STAMP: 91836 M39012/30-0022  
 126-8-5 XX XX

DATE CODE

1. FOR USE WITH MIL/IT-9 RG 174 AND  
 MIL/TT-3 - RG 316 CABLES.  
 2. FOR CABLE TRIMMING USE KITJ-1116 &  
 KITD-145.  
 3. FOR CABLE TRIMMING USE DIE SIZE 11.

0.04 D REF. 3 HOLES  
 EQUALLY SPACED

(SHT 1 OF 2)

M39012/30-0022

REV	CHANGES	DATE
0	ER 26172	SD 4 JUNE 84
1	CN 32302 A	LNW 20 JUN 90

REVISIONS

SD

SCALE: 4:1

APPROX. SURFACE AREA: \_\_\_\_\_

USED ON: \_\_\_\_\_

REF: \_\_\_\_\_

TNG ANGLE PLUG

DRAWN: SD DATE: 4 JUNE

APP: JMW DATE: 5 JUN

**EKINGS**  
 TECHNICAL CO., INC.

M39012/30-0022

(SHT 1 OF 2)

M39012/30-0022  
(SHEET 2 OF 2)

REVISIONS

REV. NO.	DATE	DESCRIPTION
0	JUNE 84	SD 1
1	JUN 84	CN 32302 A
2	JUN 90	LNM 20 JUN 90

ITEM	REQ'D	DESCRIPTION	PART NO.
1	1	K-GRIP SLEEVE	A-19-147-1-MC7
2	1	HEX NUT	
3	1	K-GRIP	
4	1	INSULATOR	
5	1	RETAINING RING	
6	1	INSULATOR	
7	1	TNC CONTACT	1-3175-3M9D
8	1	BODY ASS'Y	
9	1	TNC ANGLE CONTACT M-M	
10	1	INSULATOR	
11	1	C-RING	
12	1	GASKET	
13	1	OUTER CONTACT	
14	1	COUPLING NUT	
15	1	SOLDER PREFORM	
16	1	CABLING INSTRUCTIONS	3-189-2M88

PARTS LIST

FINISH SPEC. KER 10004

DRAWN SD DATE 1 JUNE 84  
 APPR. M/W DATE 5 JUN 84  
**BEKINGS**  
 ELECTRONICS CO., INC.  
 NORWALK, NEW YORK 10661  
 M39012/30-0022  
 (SHEET 2 OF 2)

SD

126-8-5