

**SCHOTTKY RECTIFIER**

**10 Amp**

**Major Ratings and Characteristics**

Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform	10	A
$I_{FRM}$ @ $T_C = 135^\circ\text{C}$	20	A
$V_{RRM}$	35/45	V
$I_{FSM}$ @ $t_p = 5 \mu\text{s}$ sine	1060	A
$V_F$ @ 10Apk, $T_J = 125^\circ\text{C}$	0.57	V
$T_J$ range	-65 to 150	$^\circ\text{C}$

**Description/Features**

This Schottky rectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 150° C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 150°C  $T_J$  operation
- TO-220 and D<sup>2</sup>Pak packages
- Low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

**Case Styles**

MBR10.. Series



TO-220AC

MBRB10.. Series



D<sup>2</sup>PAK

### Voltage Ratings

Part number	MBR1035/MBRB1035	MBR1045/MBRB1045
$V_R$ Max. DC Reverse Voltage (V)	35	45
$V_{RWM}$ Max. Working Peak Reverse Voltage (V)		

### Absolute Maximum Ratings

Parameters	Values	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current	10	A	@ $T_C = 135^\circ\text{C}$ , (Rated $V_R$ )
$I_{FRM}$ Peak Repetitive Forward Current	20	A	Rated $V_R$ , square wave, 20kHz $T_C = 135^\circ\text{C}$
$I_{FSM}$ Non Repetitive Peak Surge Current	1060	A	5 $\mu\text{s}$ Sine or 3 $\mu\text{s}$ Rect. pulse Following any rated load condition and with rated $V_{RRM}$ applied
	150		
$I_{RRM}$ Peak Repetitive Reverse Surge Current	1.0	A	2.0 $\mu\text{sec}$ 1.0 KHz

### Electrical Specifications

Parameters	Values	Units	Conditions
$V_{FM}$ Max. Forward Voltage Drop (1)	0.84	V	@ 20A $T_J = 25^\circ\text{C}$
	0.57	V	@ 10A $T_J = 125^\circ\text{C}$
	0.72	V	@ 20A $T_J = 125^\circ\text{C}$
$I_{RM}$ Max. Instantaneous Reverse Current (1)	0.1	mA	$T_J = 25^\circ\text{C}$ Rated DC voltage
	15	mA	$T_J = 125^\circ\text{C}$
$V_{F(TO)}$ Threshold Voltage	0.354	V	$T_J = T_J \text{ max.}$
$r_t$ Forward Slope Resistance	17.6	m $\Omega$	
$C_T$ Max. Junction Capacitance	600	pF	$V_R = 5V_{DC}$ , (test signal range 100Khz to 1Mhz) $25^\circ\text{C}$
$L_S$ Typical Series Inductance	8.0	nH	Measured from top of terminal to mounting plane
dv/dt Max. Voltage Rate of Change (Rated $V_R$ )	1000	V/ $\mu\text{s}$	

(1) Pulse Width < 300 $\mu\text{s}$ , Duty Cycle <2%

### Thermal-Mechanical Specifications

Parameters	Values	Units	Conditions
$T_J$ Max. Junction Temperature Range	-65 to 150	$^\circ\text{C}$	
$T_{stg}$ Max. Storage Temperature Range	-65 to 175	$^\circ\text{C}$	
$R_{thJC}$ Max. Thermal Resistance Junction to Case	2.0	$^\circ\text{C}/\text{W}$	DC operation
$R_{thCS}$ Typical Thermal Resistance Case to Heatsink	0.50	$^\circ\text{C}/\text{W}$	Mounting surface, smooth and greased Only for TO-220
wt Approximate Weight	2(0.07)	g(oz.)	
T Mounting Torque	Min. 6(5)	Kg-cm (lbf-in)	
	Max. 12(10)		

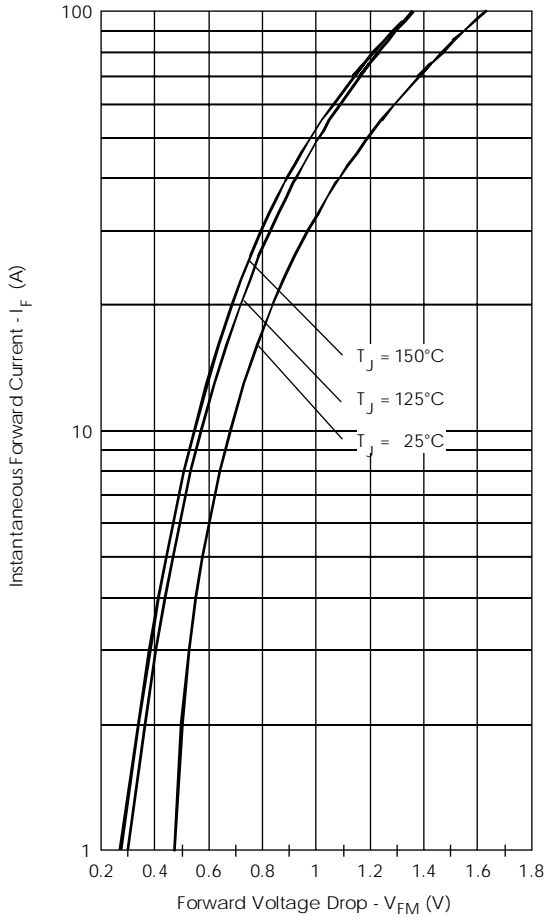


Fig. 1 - Max. Forward Voltage Drop Characteristics

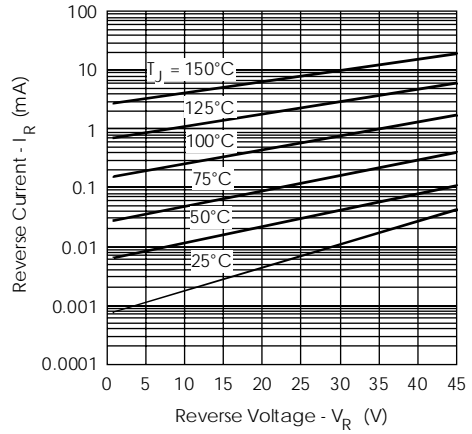


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage

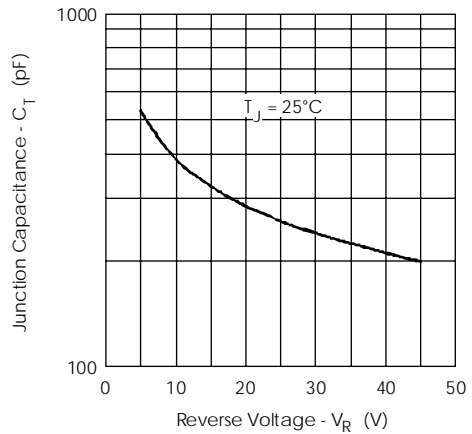


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

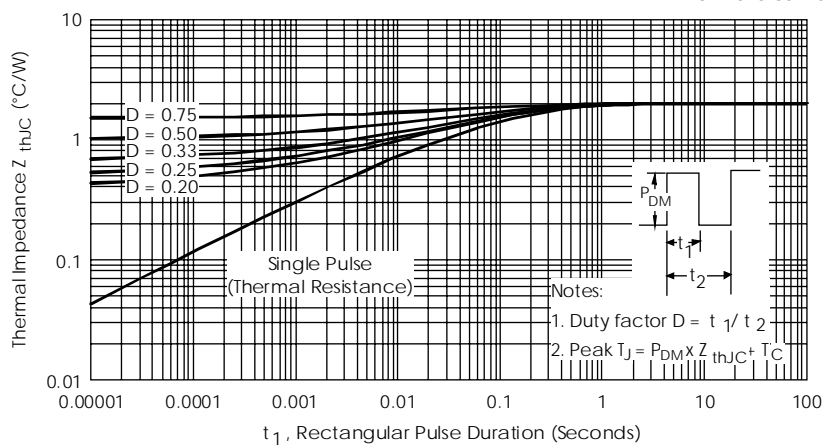


Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics

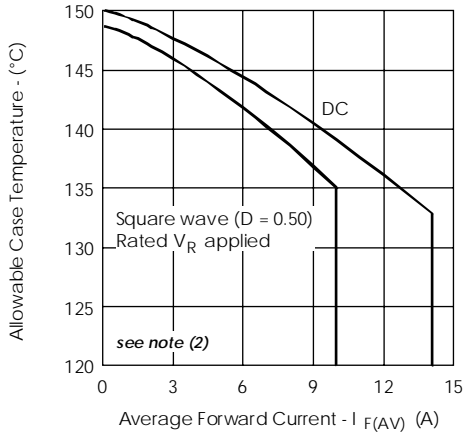


Fig.5- Max. Allowable Case Temperature Vs. Average Forward Current

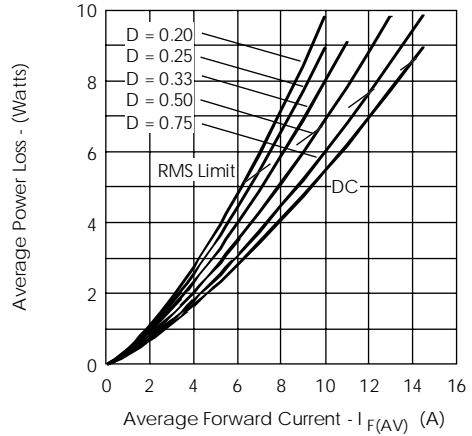


Fig.6- Forward Power Loss Characteristics

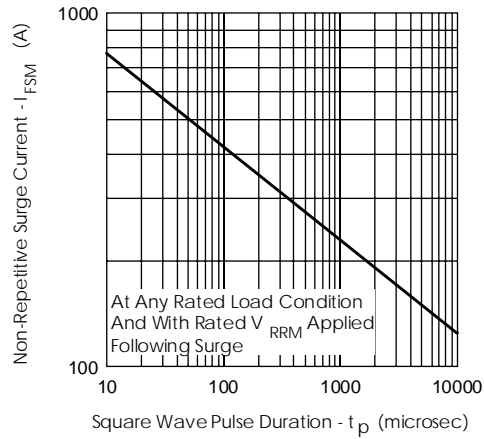


Fig.7- Max. Non-Repetitive Surge Current

(2) Formula used:  $T_c = T_j - (P_d + P_{d_{REV}}) \times R_{thJC}$ ;

$P_d$  = Forward Power Loss =  $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$  (see Fig. 6);

$P_{d_{REV}}$  = Inverse Power Loss =  $V_{R1} \times I_{R1} (1 - D)$ ;  $I_{R1} @ V_{R1}$  = rated  $V_R$

Ordering Information Table


**Device Code**

MBR	B	10	45
①	②	③	④


- 1** - Essential Part Number
- 2** - B = Surface Mount  
None = TO-220
- 3** - Current Rating
- 4** - Voltage code: Code =  $V_{RRM}$ 

35	= 35V
45	= 45V


Outline Table

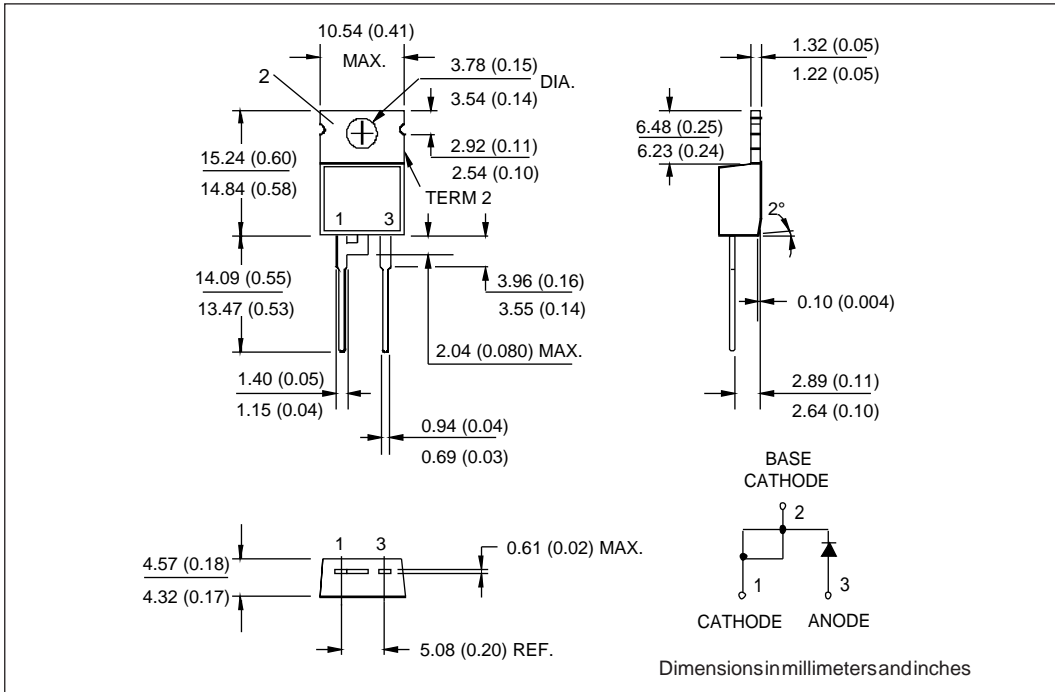

Outline Table

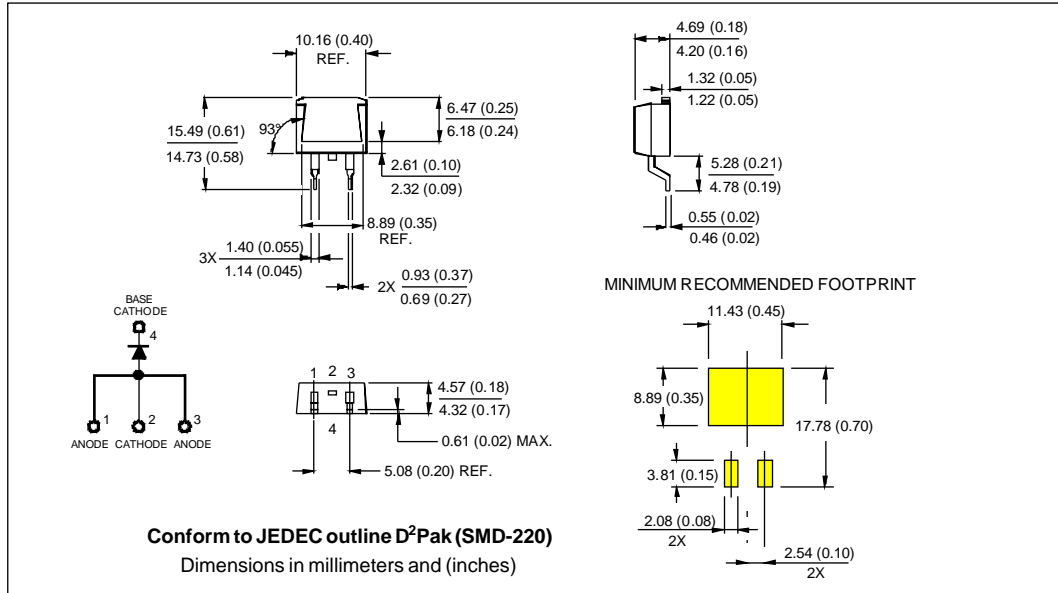

Tape & Reel Information

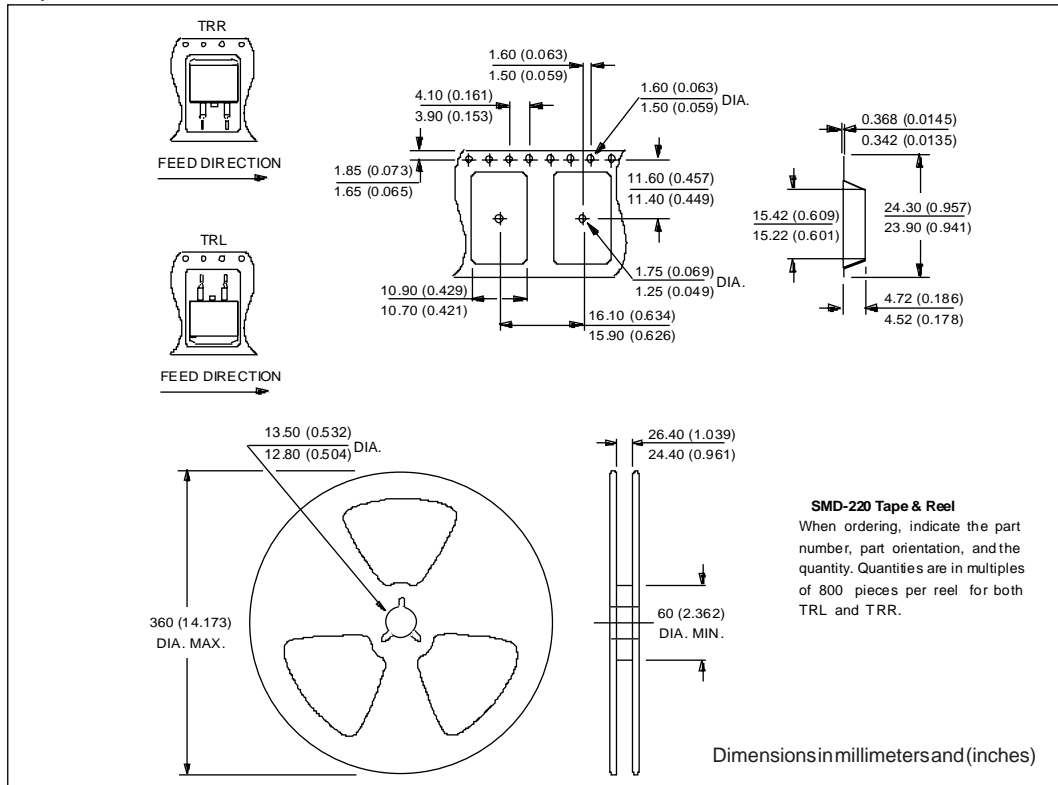

**WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245 U.S.A. Tel: (310) 322 3331. Fax: (310) 322 3332.  
**EUROPEAN HEADQUARTERS:** Hurst Green, Oxted, Surrey RH8 9BB, U.K. Tel: ++ 44 1883 732020. Fax: ++ 44 1883 733408.  
**IR CANADA:** 15 Lincoln Court, Brampton, Markham, Ontario L6T3Z2. Tel: (905) 453 2200. Fax: (905) 475 8801.  
**IR GERMANY:** Saalburgstrasse 157, 61350 Bad Homburg. Tel: ++ 49 6172 96590. Fax: ++ 49 6172 965933.  
**IR ITALY:** Via Liguria 49, 10071 Borgaro, Torino. Tel: ++ 39 11 4510111. Fax: ++ 39 11 4510220.  
**IR FAR EAST:** K&H Bldg., 2F, 30-4 Nishi-Ikebukuro 3-Chome, Toshima-Ku, Tokyo, Japan 171. Tel: 81 3 3983 0086.  
**IR SOUTHEAST ASIA:** 1 Kim Seng Promenade, Great World City West Tower, 13-11, Singapore 237994. Tel: ++ 65 838 4630.  
**IR TAIWAN:** 16 Fl. Suite D.207, Sec. 2, Tun Haw South Road, Taipei, 10673, Taiwan. Tel: 886 2 2377 9936.

<http://www.irf.com>

Fax-On-Demand: +44 1883 733420

Data and specifications subject to change without notice.