

# 2.54mm PITCH CENTER SINGLE PIN WAFER BREAKABLE S/T DIP TYPE




## 254201MS Series

Mates With SUYIN 254330,254250,254401 Series

### Specifications:

- 2~40 Circuits
- Insulator Material : P.B.T UL94V-0
- Operating Type Range : -40°C To +105°C
- Terminal Material : Brass
- Platings : Gold Or Tin Plated
- Max. Current Rating : 1.5A
- Max. Voltage Rating : 250V AC
- Dielectric Strength : 500V AC For 60 Seconds

2.54  
mm

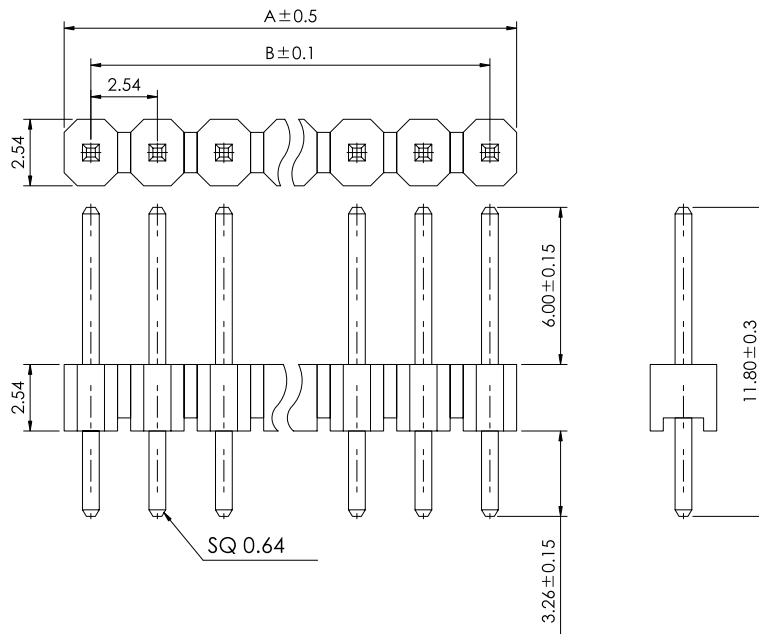

## Order Information


254201MS□□□□30Z□  
1 2 3 4 5

1. 'S': Straight DIP Type
2. No. of Pins
3. Plating
4. Color 'Z': Black
5. Package

'O': Slim Box Without CAP

Reference Page 11

## Recommended P.C.B. Layout

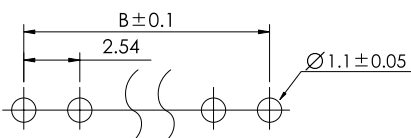

## Dimension Information

SUYIN P/NO.	DIM.A	DIM.B	SUYIN P/NO.	DIM.A	DIM.B
254201MS002□□30ZO	5.08	2.54	254201MS022□□30ZO	55.88	53.34
254201MS003□□30ZO	7.62	5.08	254201MS023□□30ZO	58.42	55.42
254201MS004□□30ZO	10.16	7.62	254201MS024□□30ZO	60.96	58.42
254201MS005□□30ZO	12.70	10.16	254201MS025□□30ZO	63.50	60.96
254201MS006□□30ZO	15.24	12.70	254201MS026□□30ZO	66.04	63.50
254201MS007□□30ZO	17.78	15.24	254201MS027□□30ZO	68.58	66.04
254201MS008□□30ZO	20.32	17.78	254201MS028□□30ZO	71.12	68.58
254201MS009□□30ZO	22.86	20.32	254201MS029□□30ZO	73.66	71.12
254201MS010□□30ZO	25.40	22.86	254201MS030□□30ZO	76.20	73.66
254201MS011□□30ZO	27.94	25.40	254201MS031□□30ZO	78.74	76.20
254201MS012□□30ZO	30.48	27.94	254201MS032□□30ZO	81.28	78.74
254201MS013□□30ZO	33.02	30.48	254201MS033□□30ZO	83.82	81.28
254201MS014□□30ZO	35.56	33.02	254201MS034□□30ZO	86.36	83.82
254201MS015□□30ZO	38.10	35.56	254201MS035□□30ZO	88.90	86.36
254201MS016□□30ZO	40.64	38.10	254201MS036□□30ZO	91.44	88.90
254201MS017□□30ZO	43.18	40.64	254201MS037□□30ZO	93.98	91.44
254201MS018□□30ZO	45.72	43.18	254201MS038□□30ZO	96.52	93.98
254201MS019□□30ZO	48.26	45.72	254201MS039□□30ZO	99.06	96.52
254201MS020□□30ZO	50.80	48.26	254201MS040□□30ZO	101.60	99.06
254201MS021□□30ZO	53.34	50.80			