



Micro Commercial Components



Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

FRB2504

25 Amp Surface Mount Fast Recovery Rectifier

Features

- Lead Free Finish/RoHS Compliant(Note 1)("P" Suffix designates Compliant. See ordering information)
- High Current($I_{F(AV)}=25A$)
- Low V_F for Forward Conduction Losses
- Glass Passivated Junction
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Marking:FRB2504

MAXIMUM RATINGS

Rating	Symbol	Value	Units
Peak Repetitive Reverse Voltage	V_{RRM}	400	V
Working Peak Reverse Voltage	V_{RRM}	400	V
DC Blocking Voltage	V_{DC}	400	V
Average Rectified Forward Current($T_C=100^\circ C$)	$I_{F(AV)}$	25	A
Non-Repetitive Peak Forward Surge Current	I_{FSM}	280	A
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-50 to 150	$^\circ C$


THERMAL CHARACTERISTICS

Rating	Symbol	Value	Units
Thermal Resistance Junction To Case	R_{thJC}	1	$^\circ C/watt$

ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ C$ unless otherwise noted)


Parameter	Symbol	Conditions	Typical	Max	Units
Forward voltage(Note 1)	V_F	$I_F=25A$	1.17	1.3	V
		$I_F=50A$	1.35	1.5	
Reverse Leakage Current	I_R	$V_R=400V$	--	10	μA
Reverse Recovery Time	T_{rr}	$I_F=0.5A, I_R=1.0A$ $I_{RR}=0.25A$	110	250	ns

Note: 1. High Temperature Solder Exemptions Applied, see EU Directive Annex 7.

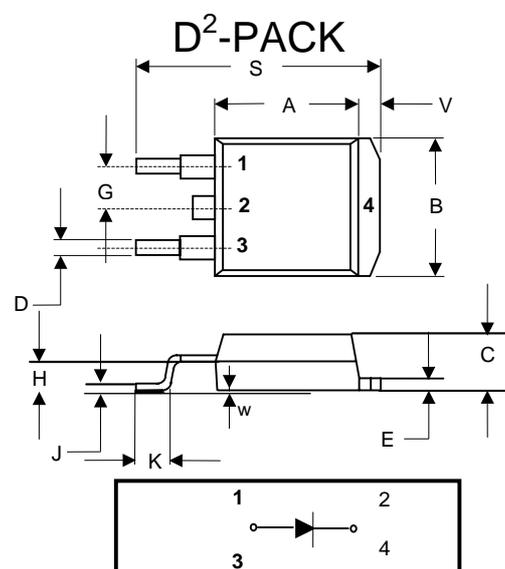

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.320	.359	8.13	9.14	
B	.380	.411	9.65	10.45	
C	.160	.190	4.06	4.83	
D	.020	.035	0.51	0.89	
E	.045	.055	1.14	1.40	
G	.095	.105	2.41	2.67	
H	.096	.120	2.43	3.03	
J	.014	.021	0.35	0.53	
K	.090	.110	2.29	2.79	
S	.575	.625	14.60	15.80	
V	.045	.055	1.14	1.40	
W	0	.006	0	0.15	

SUGGESTED SOLDER PAD LAYOUT



TYPICAL CHARACTERISTICS (T = 25°C unless otherwise noted)

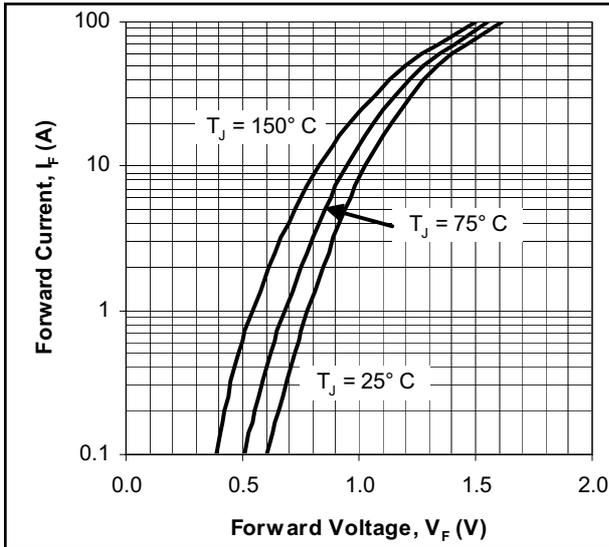


Figure 1. Typical Forward Characteristics

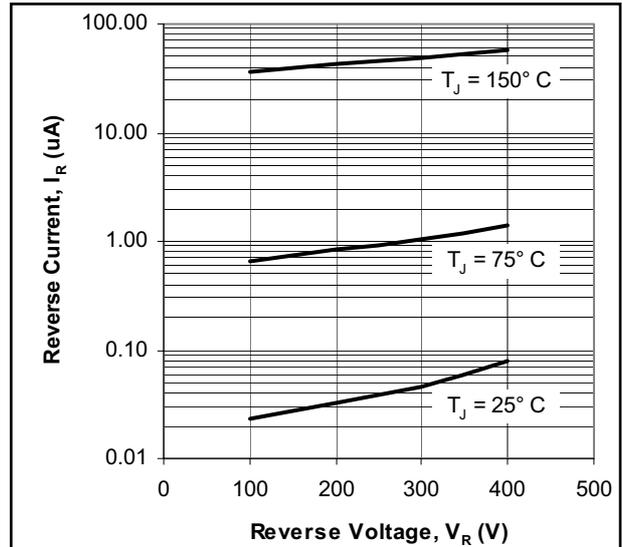


Figure 2. Typical Reverse Characteristics

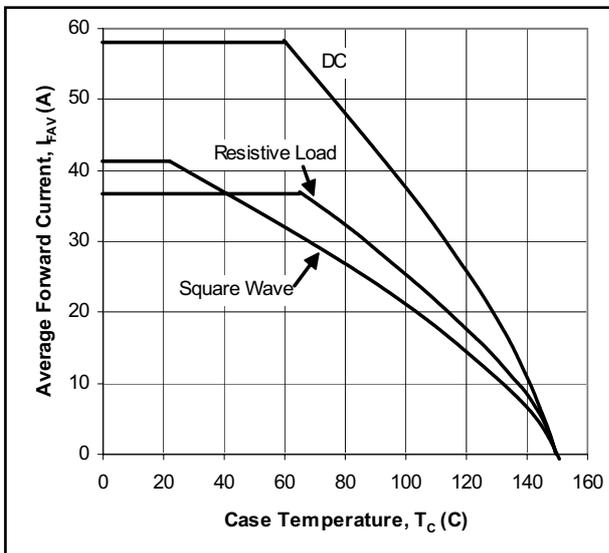


Figure 3. Current Derating Curves


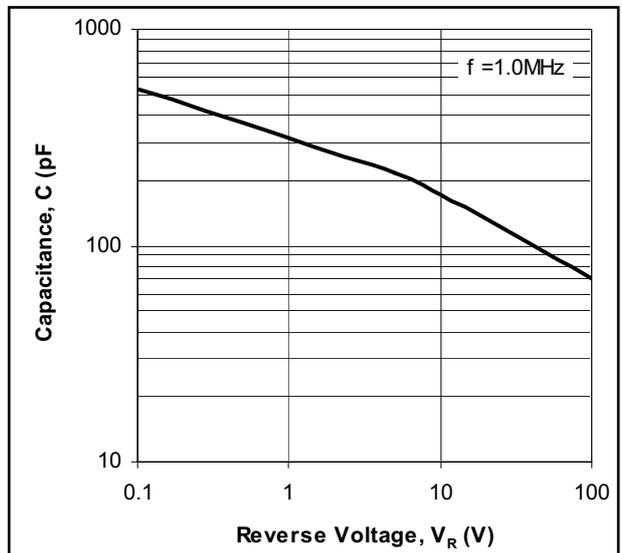


Figure 4. Typical Capacitance

Part Orientation In Tape



20 Empty Pockets For Leader Tape
Ordering with pn#: FRB2504-TP

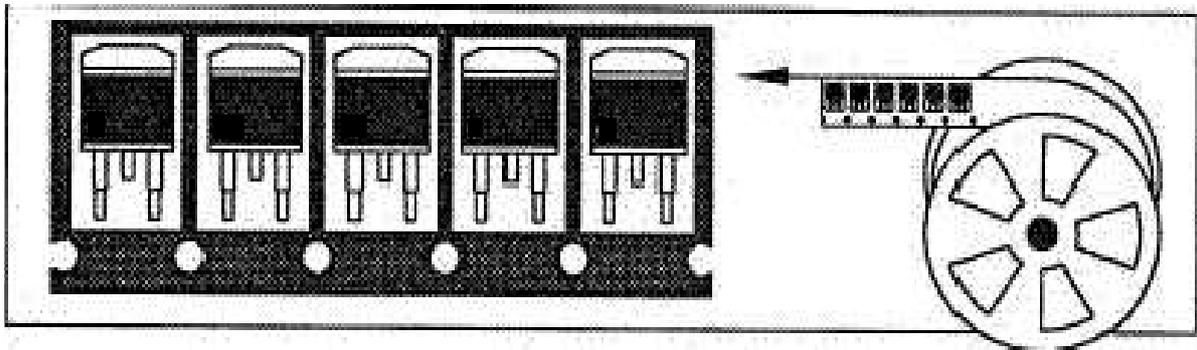

Micro Commercial Components

Ordering Information :

Device	Packing
Part Number-TP	Tape&Reel: 800pcs/Reel

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

*****LIFE SUPPORT*****

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

*****CUSTOMER AWARENESS*****

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

www.mccsemi.com