

SM320B thru SM3100B

Schottky Barrier Rectifiers

Reverse Voltage 20 to100V Forward Current 3.0A

FEATURES

- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- * Low power loss, high efficiency
- * For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- * Guardring for over voltage protection
- * High temperature soldering guaranteed: 260°C/10 seconds at terminals



Mechanical Data

Case: JEDEC DO-214AA / SMB
molded plastic over glass die

Terminals: Plated axial leads, solderable per
MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.098 g

Handling Precaution: None

We declare that the material of product compliance
with ROHS requirements

Electrical Characteristic

1. Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	symbol	SM320B	SM330B	SM340B	SM350B	SM360B	SM380B	SM3100B	Unit
device marking code		SM320B	SM330B	SM340B	SM350B	SM360B	SM380B	SM3100B	
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	80	100	V
Maximum RMS voltage	V _{RSM}	14	21	28	35	42	56	70	V
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	80	100	V
Maximum average forward rectified current 0.375" (9.5mm) lead length (See fig. 1)	I _{F(AV)}	3.0							A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	80							A
Typical thermal resistance (Note 1)	R _{θJA}	50							°C/W
Operating junction and storage temperature range	T _J , T _{STG}	−40 to +150							°C

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	symbol	SM320B	SM330B	SM340B	SM350B	SM360B	SM380B	SM3100B	Unit
Maximum instantaneous forward voltage at 3.0A	V _F	0.50		0.70		0.85		V	
Maximum DC reverse current TA = 25°C at rated DC blocking voltage TA = 100°C	I _R	0.5		10.0				mA	
Typical junction capacitance at 4.0V, 1MHz	C _J	110							PF

NOTES:

- Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

SM320B thru SM3100B

2.Ratings and Characteristic Curves (TA = 25°C unless otherwise noted)

Fig. 1 - Forward Current Derating Curve

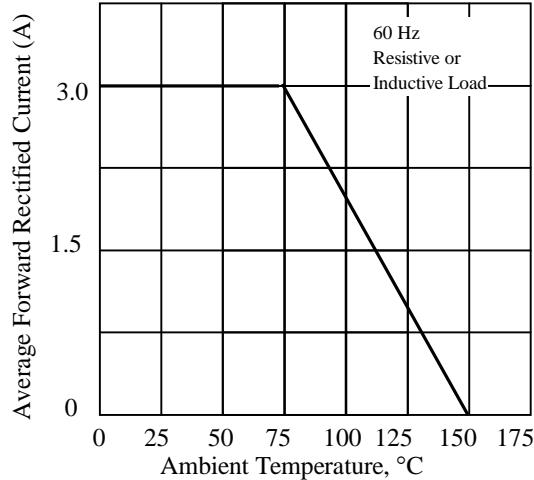


Fig. 2 - Maximum Non-repetitive Peak

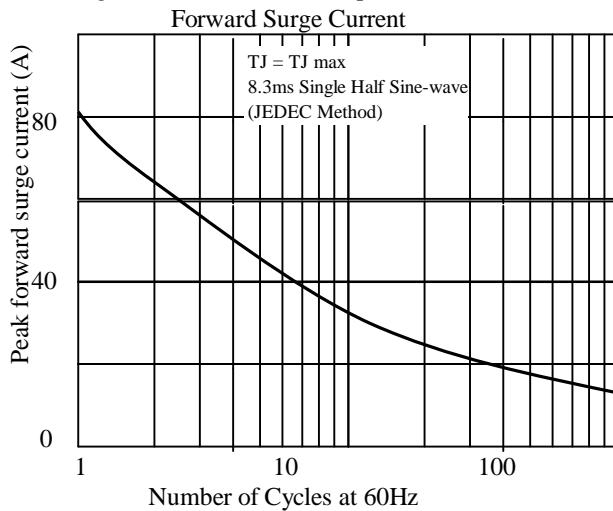


Fig. 3. - Typical Instantaneous Forward Characteristics

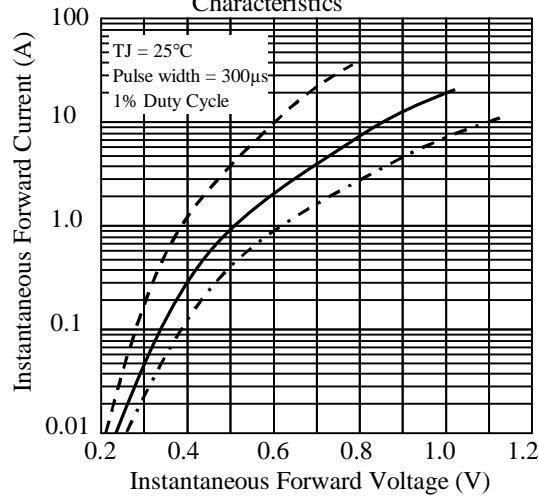


Fig. 4. - Typical Reverse Characteristics

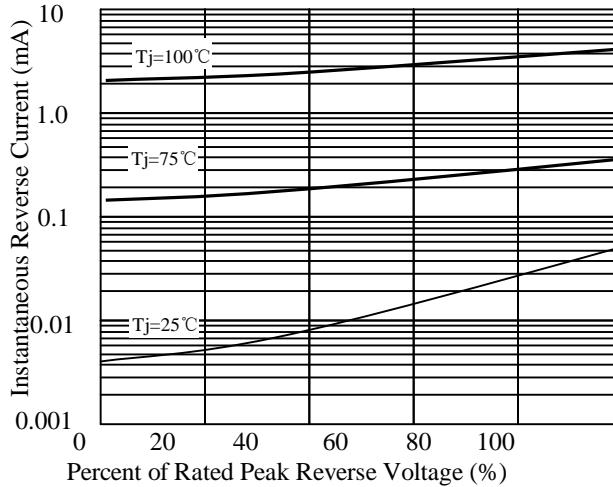


Fig 5. - typical transient thermal impedance


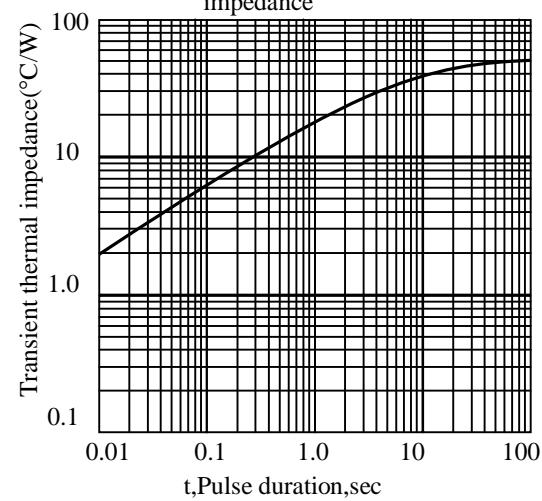



Fig 6. - Typical Junction Capacitance

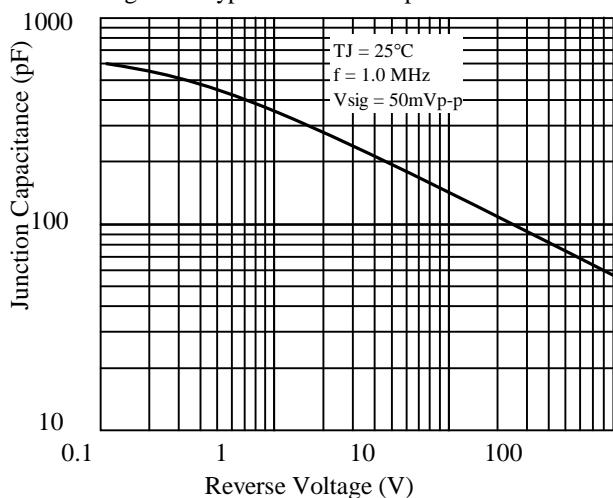

SM320B thru SM3100B

3. dimension:


Package outline

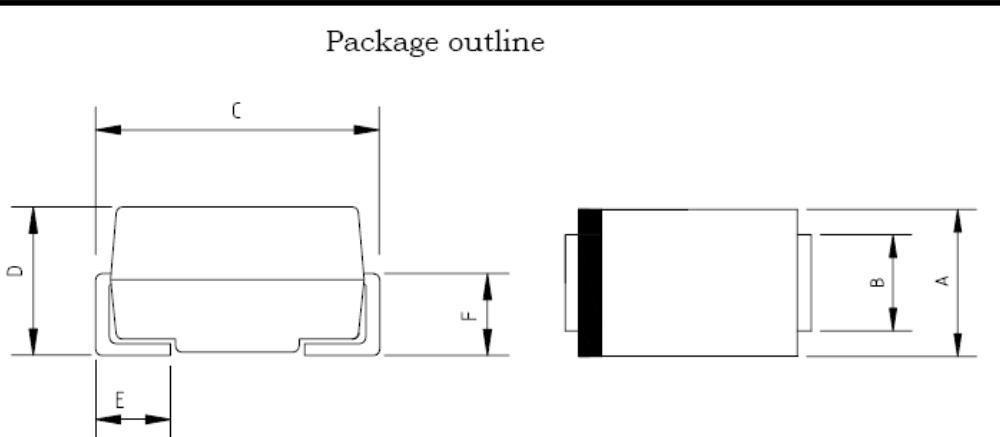

Dimensions				Note: DO-214AA molded plastic case The marking band indicates the cathode
	inches	mm		
	Min.	Max.	Min.	Max.
A	0.10	0.155	3.30	3.94
B	0.077	0.083	1.97	2.11
C	0.205	0.220	5.21	5.59
D	0.084	0.096	2.13	2.44
E	0.030	0.060	0.76	1.52
F				

Mounting Pad Layout

---SMB

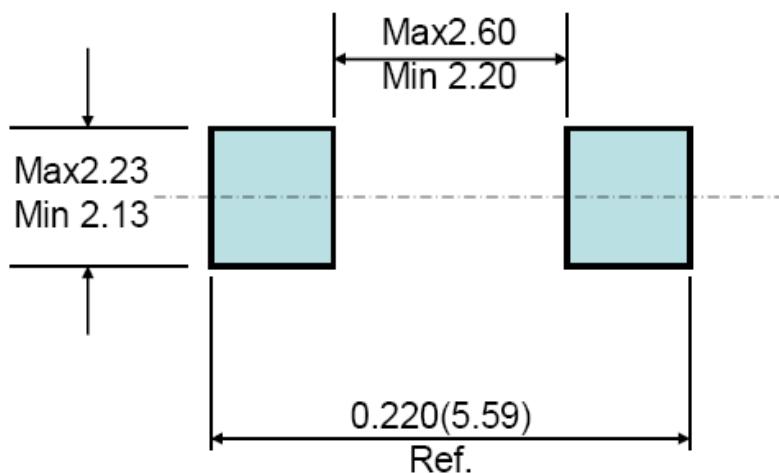



乐山无线电股份有限公司
Leshan Radio Company, Ltd

SM320B thru SM3100B

4. Update Record

版次	更新记录	更新作者	更新日期
1	第一版	周杰	2011-4-9