

Performance and Material Specifications

MATERIALS AND FINISHES

Shell	Steel, Tin Plated
Insulator	Glass Filled Thermoplastic, UL 94V-0
Pin Contacts	Copper Alloy, Plated Gold over Nickel
Socket Contacts	Phosphor Bronze, Plated Gold over Nickel

MECHANICAL FEATURES

Coupling	Friction and lock accessories
Polarization	Keystone-shaped shells
Termination	Printed circuit

PERFORMANCE SPECIFICATIONS


Temperature Range	55°C to 105°C
Current Rating	5 Amps
Dielectric Withstanding Voltage	1000V AC (for 1 min.)
Insulation Resistance	15 mΩ min. (at 500V DC)
Contact Resistance	15 mΩ max. (mated)

Dimensions/Part Numbers – Stamped Contacts

With or without integral board standoff
PCB Thickness up to .092 (2.34)



PCB Hole Patterns – Pages 14-15

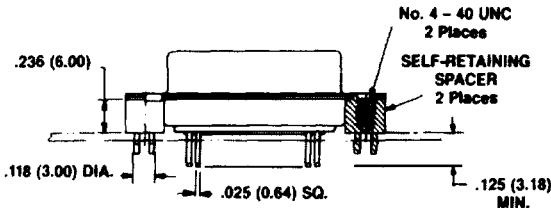


NOTE: Section of side view and the engaging face view are designed to show configurations of both pin and socket.

Number of Contacts (Shell Size)		Part Number	
		With Standoff	Without Standoff
9 (E)	Plug	ADEZ9POL2	ADE9POL2
	Rec.	ADEZ9SOL2	ADE9SOL2
15 (A)	Plug	ADAZ15POL2	ADA15POL2
	Rec.	ADAZ15SOL2	ADA15SOL2
25 (B)	Plug	ADBZ25POL2	ADB25POL2
	Rec.	ADBZ25SOL2	ADB25SOL2
37 (C)	Plug	ADCZ37POL2	ADC37POL2
	Rec.	ADCZ37SOL2	ADC37SOL2
50 (D)	Plug	ADDZ50POL2	ADD50POL2
	Rec.	ADDZ50SOL2	ADD50SOL2


Consult factory for High Density Straight PC.

Dimensions/Part Numbers – Machined Contacts

Straight PC Tail, Receptacles (Includes Socket Contacts)
With .120 (3.15) Through-Mounting Holes.
Compatible With Straight PCB Combo D'.
PCB Thickness up to .125 (3.18)

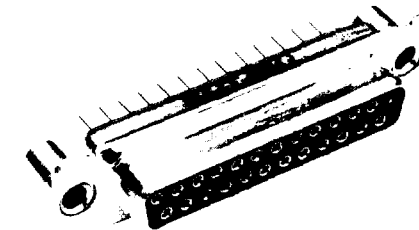

Printed Circuit Applications



NOTE: All connectors come with .300 (7.62) standoffs attached.

Compliant Boardlock:	Gold Over Nickel		30/± in. Gold	
	No	Yes	No	Yes
Layout				
DE-9S	DEMV9SNA197	DEMZ9SNA197	DEMV9SNK126	DEMZ9SNK126
DE-9P	DEMV9PNK87	DEMZ9PNK87	DEMV9PNK127	DEMZ9PNK127
DA-15S	DAMV15SNA197	DAMZ15SNA197	DAMV15SNK126	DAMZ15SNK126
DA-15P	DAMV15PNK87	DAMZ15PNK87	DAMV15PNK127	DAMZ15PNK127
DB-25S	DBMV25SNA197	DBMZ25SNA197	DBMV25SNK126	DBMZ25SNK126
DB-25P	DBMV25PNK87	DBMZ25PNK87	DBMV25PNK127	DBMZ25PNK127
DC-37S	DCMV37SNA197	DCMZ37SNA197	DCMV37SNK126	DCMZ37SNK126
DC-37P	DCMV37PNK87	DCMZ37PNK87	DCMV37PNK127	DCMZ37PNK127
DD-50S	DDMV50SNA197	DDMZ50SNA197	DDMV50SNK126	DDMZ50SNK126
DD-50P	DDMV50PNK87	DDMZ50PNK87	DDMV50PNK127	DDMZ50PNK127

Performance Specifications – Page 11

For Tin Plated Contacts, Add – A220

Highlighted part numbers indicate standard product; usually available with shorter lead times.