

.100" PITCH FLEXSTRIP® INSERT MOLDED HEADER



LR49571 E60980

PHYSICAL PROPERTIES

INSULATION MATERIAL:

Socket – Glass reinforced thermoplastic, rated UL 94V-0

Jumper – Nomex, Polyester, Teflon, Kapton

Locking – Nylon

HOUSING (LOCKING) COLOR:

Socket – blue, Jumper – black

ELECTRICAL PROPERTIES

CONTACT PLATING: Tin plating


CURRENT RATING: 2 amps per conductor

ENVIRONMENTAL PROPERTIES

TEMPERATURE RATING: Nomex* 105°C
Polyester 105°C
Teflon* 125°C
Kapton* 150°C

MATING CONNECTOR

See page 166

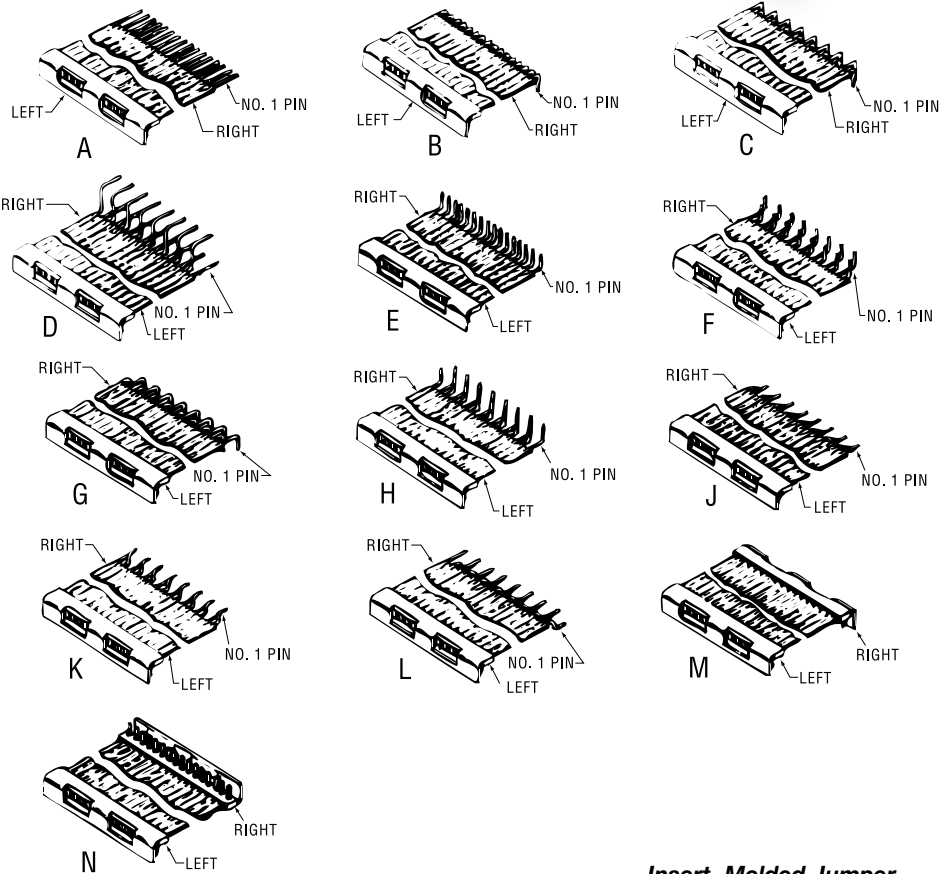

NO. OF POSITIONS	DIMENSIONS	
	A	B
8	21.8	17.78
9	24.4	20.32
10	26.9	22.86
14	37.1	33.02
16	42.2	38.1
18	45.7	43.18
20	52.3	48.26
22	57.4	53.34
24	62.5	58.42

