

1.5 WATTS UNREGULATED DC/DC CONVERTERS

PWR13XX



FEATURES

- HIGH ISOLATION - 4000V RATING
- 8000V ISOLATION TEST VOLTAGE
- BARRIER 100% PRODUCTION TESTED
- LOW BARRIER CAPACITANCE - 10PF
- LOW LEAKAGE CURRENT - 2 μ A MAX
- 24-PIN DIP PACKAGE
- INTERNAL FILTERING

APPLICATIONS

- BIOMEDICAL DATA ACQUISITION
- INDUSTRIAL PROCESS CONTROL
- ANALYTICAL MEASUREMENTS
- GROUND LOOP ELIMINATION
- INTRINSIC SAFETY SYSTEMS

DESCRIPTION

The PWR13XX Series offers a broad line of low-cost, high-isolation voltage, unregulated, single and dual output DC/DC converters in a 24-pin DIP package. These small converters offer a 4000V isolation rating in a 1.25" x 0.8" package area.

The dielectric withstand characteristics of each converter is tested in production to ensure barrier integrity. During the development of the PWR13XX Series extensive testing was done to verify that subjecting the barrier to as many as ten barrier tests will not destroy the barrier.

The PWR13XX Series uses advanced circuit design and packaging technology to realize superior reliability and performance. A 220kHz driven push-pull oscillator is used to ensure stable frequency and non-saturating operation of the input stage. This means there are no high peak voltages or currents like other design topologies, which

can reduce unit reliability. Reliability is further enhanced by the use of MOSPOWER transistors. These rugged devices permit higher frequency operation with less complicated drive circuitry than is possible with bipolar power transistors. Reduced parts count adds to the reliability of the PWR13XX Series.

The high efficiency of the PWR13XX Series means less internal power dissipation. With less heat to dissipate, the PWR13XX Series can operate over a wider ambient temperature range with no degradation of reliable operation.

The PWR13XX Series offers the user low cost without sacrificing reliability. The use of surface mounted devices and manufacturing technologies make it possible to offer premium performance and low cost. Testing of the PWR13XX isolation barrier is performed per the methods set forth by UL544, VDE750, CSA 22.2 and IEC 601-1.

Internet: <http://www.cdpowerelectronics.com>

Power Electronics Division, United States
3400 E Britannia Drive, Tucson, Arizona 85706
Phone: 520.295.4100 Fax: 520.770.9369

Power Electronics Division, Europe
C&D Technologies (Power Electronics) Ltd.
132 Shannon Industrial Estate, Shannon, Co. Clare, Ireland
Tel: +353.61.474.133 Fax: +353.61.474.141

ELECTRICAL SPECIFICATIONS

Specifications typical at $T_A = +25^{\circ}\text{C}$, nominal input voltage, rated output current unless otherwise noted.

MODEL	NOMINAL INPUT VOLTAGE (Vdc)	RATED OUTPUT VOLTAGE (Vdc)	RATED OUTPUT CURRENT (mA)	INPUT CURRENT		REFLECTED RIPPLE CURRENT (mAp-p)
				NO LOAD (mA)	RATED LOAD (mA)	
PWR1300	5	5	300	50	400	30
PWR1301	5	12	125	50	400	30
PWR1302	5	15	100	50	400	30
PWR1303	5	± 5	± 150	50	400	30
PWR1304	5	± 12	± 63	50	400	30
PWR1305	5	± 15	± 50	50	400	30
PWR1306	12	5	300	30	167	25
PWR1307	12	12	125	30	167	25
PWR1308	12	15	100	30	167	25
PWR1309	12	± 5	± 150	30	167	25
PWR1310	12	± 12	± 63	30	167	25
PWR1311	12	± 15	± 50	30	167	25
PWR1312	15	5	300	30	133	20
PWR1313	15	12	125	30	133	20
PWR1314	15	15	100	30	133	20
PWR1315	15	± 5	± 150	30	133	20
PWR1316	15	± 12	± 63	30	133	20
PWR1317	15	± 15	± 50	30	133	20

COMMON SPECIFICATIONS

Specifications typical at $T_A = +25^{\circ}\text{C}$, rated input voltage, rated output current unless otherwise noted.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
INPUT Voltage Range		4.5 10.8 13.5	5 12 15	5.5 13.2 16.5	V _{DC} V _{DC} V _{DC}
ISOLATION Rated Voltage Test Voltage Resistance Capacitance Leakage Current	60 Hz, 60 Seconds V _{ISO} = 240VAC, 60Hz	4,000 8,000	10 10 1	2	V _{DC} V _{pk} G Ω pF μ Arms
OUTPUT Rated Power Voltage Setpoint Accuracy Ripple & Noise	Rated Load, Nominal V _{in} BW = DC to 10MHz BW = 10Hz to 2MHz		1.5 40 10	± 5	Watts % mVp-p mVrms
REGULATION Line Regulation Load Regulation	High Line to Low Line See Performance Curves		1.5		%/%
GENERAL Efficiency Switching Frequency Package Weight MTTF per MIL-HDBK-217, Rev. E Ground Benign Fixed Ground Naval Sheltered Airborne Uninhabited Fighter	Circuit Stress Method T _A = +25°C T _A = +85°C T _A = +35°C T _A = +35°C T _A = +35°C		75 220 12 2,000,000 90,000 540,000 300,000 55,000		% kHz g Hr Hr Hr Hr Hr
TEMPERATURE Specification Operation Storage		-40 -55 -55	+25	+85 +100 +110	°C °C °C

ABSOLUTE MAXIMUM RATINGS

Output Short-Circuit Duration	5 seconds
Internal Power Dissipation	750mW
Lead Temperature (soldering, 10 seconds max)	+300°C

ORDERING INFORMATION

	PWR	13XX	A	/H
Device Family				
PWR indicates DC/DC converter				
Model Number				
Selected from Table of Electrical Characteristics				
Package				
Screening Option				

MECHANICAL

TOPVIEW

SIDEVIEW

BOTTOMVIEW

PIN CONNECTIONS

PIN	SINGLE MODELS	DUAL MODELS
1	+V _{IN}	+V _{IN}
2	+V _{IN}	+V _{IN}
11	+V _{OUT}	+V _{OUT}
12	+V _{OUT}	+V _{OUT}
13	-V _{OUT}	Common
14	-V _{OUT}	Common
15	No Pin	-V _{OUT}
23	-V _{IN}	-V _{IN}
24	-V _{IN}	-V _{IN}

Notes:

All dimensions are in inches (millimeters).

GRID: 0.100 inches (2.54 millimeters)

* Common pins not present on single output models.







PIN PLACEMENT TOLERANCE: ±0.015"

Marked with: specific model ordered, date code, job code.

MATERIAL: Units are encapsulated in a low thermal resistance molding compound which has excellent chemical resistance, wide operating temperature range, and good electrical properties under high humidity environments. The encapsulant and outer shell of the unit have UL94V-0 ratings. Lead material is brass with a solder plated surface to allow ease of solderability.

TYPICAL PERFORMANCE CURVES

Specifications at $T_A = +25^\circ\text{C}$, nominal input voltage, rated output current

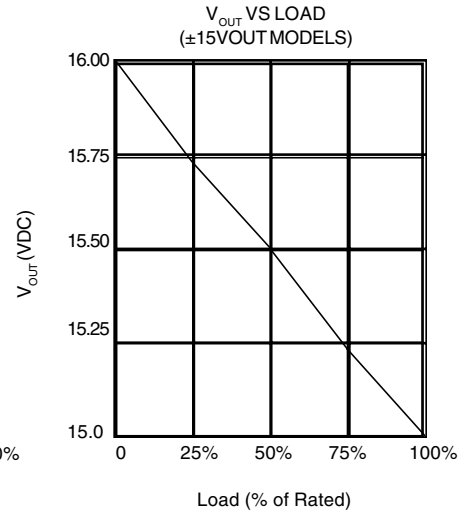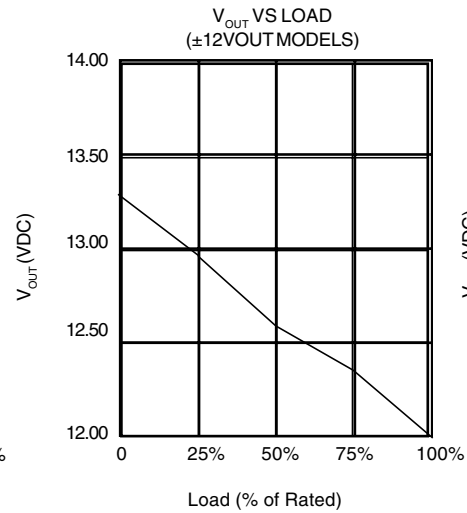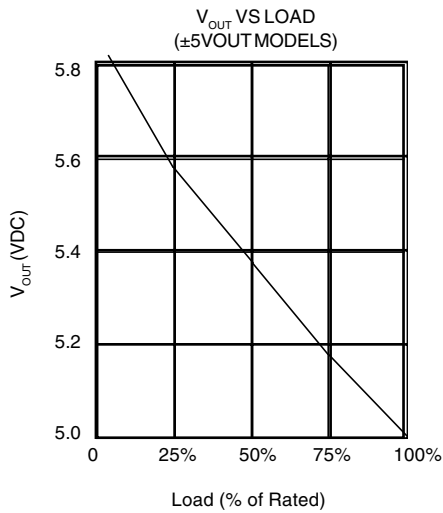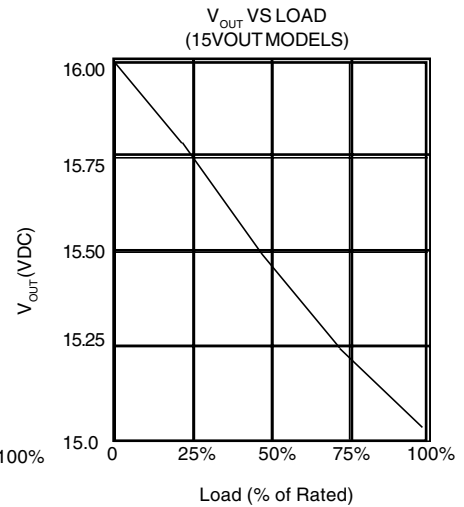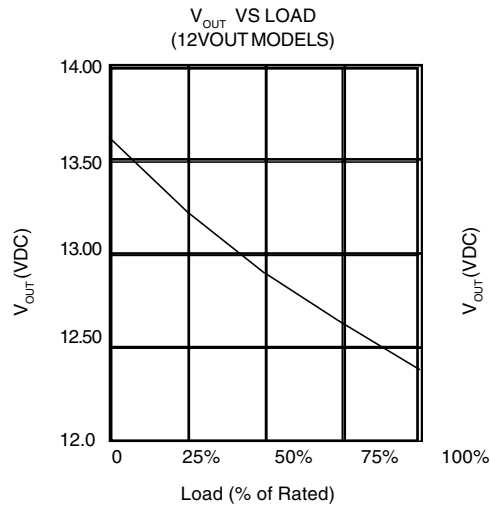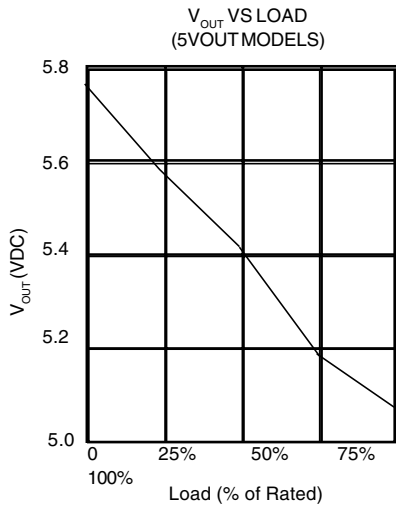

The information provided herein is believed to be reliable; however, C&D TECHNOLOGIES assumes no responsibility for inaccuracies or omissions. C&D TECHNOLOGIES assumes no responsibility for the use of this information, and all use of such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. C&D TECHNOLOGIES does not authorize or warrant any C&D TECHNOLOGIES product for use in life support devices/systems or in aircraft control applications.

Model No.	Rated Input		SC	Output			OC	SP	EP	FC	GC
-----------	-------------	--	----	--------	--	--	----	----	----	----	----

V	Hz	Max V	Max A	Max VA
---	----	-------	-------	--------

PWR1300A	5	DC	3	5	0.3	1.5	3	950	—	0	—
PWR1301A	5	DC	3	12	0.125	1.5	3	950	—	0	—
PWR1302A	5	DC	3	15	0.1	1.5	3	950	—	0	—
PWR1303A	5	DC	3	+/-5	0.15	1.5	3	950	—	0	—
PWR1304A	5	DC	3	+/-12	0.063	1.5	3	950	—	0	—
PWR1305A	5	DC	3	+/-15	0.05	1.5	3	950	—	0	—
PWR1306A	12	DC	3	5	0.3	1.5	3	950	—	0	—
PWR1307A	12	DC	3	12	0.125	1.5	3	950	—	0	—
PWR1308A	12	DC	3	15	0.1	1.5	3	950	—	0	—
PWR1309A	12	DC	3	+/-5	0.15	1.5	3	950	—	0	—
PWR1310A	12	DC	3	+/-12	0.063	1.5	3	950	—	0	—
PWR1311A	12	DC	3	+/-15	0.05	1.5	3	950	—	0	—
PWR1312A	15	DC	3	5	0.3	1.5	3	950	—	0	—
PWR1313A	15	DC	3	12	0.125	1.5	3	950	—	0	—
PWR1314A	15	DC	3	15	0.1	1.5	3	950	—	0	—
PWR1315A	15	DC	3	+/-5	0.15	1.5	3	950	—	0	—
PWR1316A	15	DC	3	+/-12	0.063	1.5	3	950	—	0	—
PWR1317A	15	DC	3	+/-15	0.05	1.5	3	950	—	0	—

Isolated extra low voltage (ELV)*

3 = Isolated safety extra low voltage (SELV)*