





path no. e:\edms\cq\1000\10002226\10002226c1a

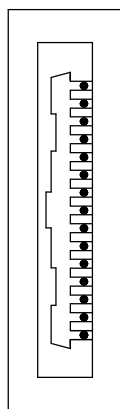

TOLERANCES

L<2000	±30mm
2000<L<5000	±50mm
L>5000	±100mm

mat'l. code				tolerances unless otherwise specified				CUSTOMER		 ELECTRONICS www.fciconnect.com	
litr	ecn no	dr	date	linear	.X ±.3		projection 	title PCMCIA CABLE ASSEMBLY DB9P MALE TO PCMCIA 15P	product family CABLE ASS'Y	code NAN	
A	N20065	SHENW	03/06/02		.XX ±.13						
					.XXX ±.051						
				angles	0° ±2°		 mm scale ---	sheet 1 of 2			
				dr	WJ SHEN	03/06/02					
				enrg	CHENG M	03/06/02					
				chr	CHENG M	03/06/02	A4	10002226			
				appd	CHENG M	03/06/02					
sheet index	revision	A	A								
	sheet	1	2								



PRODUCT NO.
10002226-CVWXP

7	OVERMOLD	PVC, BLACK	AR
6	SCREW MOLD	PVC, BLACK	AR
5	PRE MOLD	PE	AR
4	SCREW	STEEL, #4-40	2PCS
3	D-SUB 9P	MALE	1PC
2	PCMCIA 15P		1PC
1	CABLE		AR
NO.	DESCRIPTION	MATERIAL	Q'TY

WIRING LIST

DB9P/M	COLOR	PCMCIA 15P
2	RED	5
3	GREEN	6
5	BLACK	8
SHELL	DRAIN	SHELL

NOTE:

1. PART NO. DESCRIPTION:

10002226-C VWX P

OVERMOLDING COVER AND
CABLE COLOR OPTION:

B: BLACK

PCMCIA CONN. PLATED
OPTION:

A: 3u" GOLD

B: 15u" GOLD





C: 30u" GOLD

VWX LENGTH SPECIFICATION:

V: LENGTH IN METERS

W: LENGTH IN 1/10 METERS

X: LENGTH IN 1/100 METERS

mat'l. code				tolerances unless otherwise specified		CUSTOMER		 ELECTRONICS	
litr	ecn no	dr	date	linear	.X ±.3	projection 	title PCMCIA CABLE ASSEMBLY DB9P MALE TO PCMCIA 15P		www.fciconnect.com
A					.XX ±.13				
					.XXX ±.051				
				angles	0° ±2'		product family CABLE ASS'Y	code NAN	
				dr	WJ SHEN 03/06/02				
				enrg	CHENG M 03/06/02				
				chr	CHENG M 03/06/02	scale ---	A 4	10002226	sheet 2 of -
				appd	CHENG M 03/06/02				
sheet index		revision sheet							