



Component plugs


Switching relay modules



Current pulse switching module AC current flow monitoring module Surge suppression modules

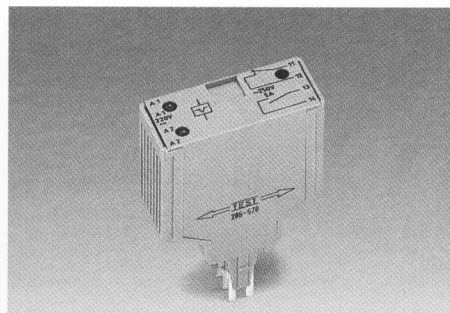


Optocoupler and Temperature control modules

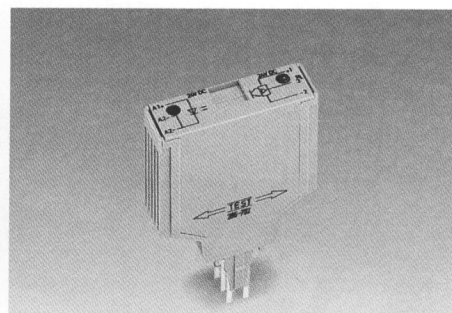

Item-No.	Pack.-unit pcs	Item-No.	Pack.-unit pcs	Item-No.	Pack.-unit pcs
	286-364 25 24 V DC, 1 make contact Module width 10 mm/0.394 in		Current pulse switch. module, 286-570 230 V AC 10 286-571 24 V DC 10 1 break, 1 make contact Module width 20 mm/0.787 in		Optocoupler module Inp. 24 V DC, Outp. 24 V DC / 500 mA 286-752 15 Module width 15 mm/0.591 in
	286-304 15 24 V DC, 1 changeover contact Module width 15 mm/0.591 in		286-508 15 230 V AC/DC, 1 changeover contact Module width 15 mm/0.591 in		Optocoupler module Inp. 24 V DC, Outp. 24 V DC / 4 A 286-723 15 Module width 15 mm/0.591 in
	286-312 10 24 V DC, 2 changeover contacts Module width 20 mm/0.787 in		286-661 10 24 V AC current flow monitoring module min. starting current: 80 mA, max. current: 6 A Module width 20 mm/0.787 in		Optocoupler module Inp. 24 V DC, Outp. 230 V AC / 50 mA-1A 286-734 15 Module width 15 mm/0.591 in
	286-516 10 230 V AC, 2 changeover contacts Module width 20 mm/0.787 in		286-842 10 Surge suppression module 230 V DC $\pm 10\%$ Module width 25 mm/0.984 in		Temperature control modules, with error output (4-20 mA) for broken wire, Thermocouple J: 0-750 °C 286-867 10 Thermocouple K: 0-1000 °C 286-868 10 Module width 20 mm/0.787 in
	286-336 10 24 V DC, 2 break contacts and 2 make contacts Module width 25 mm/0.984 in		286-835 15 Surge suppression module operating voltage 230 V AC Module width 15 mm/0.591 in complete with terminal block		Temperature transducer, for PT 100 and PT 1000 type RTD elements -30 °C up to +150 °C (P 100) 286-862/150-030 10 0 °C up to + 300 °C (P 100) 286-862/000-300 10 0 °C up to + 100 °C (PT 1000) 286-875 10 Module. width 20 mm/0.787 in
	286-375 24 V DC 5 286-578 110/120 V AC 5 286-579 230 V AC 5 4 changeover contacts Module width 35 mm/1.378 in				

Accessories

2-conductor terminal blocks for module width



10 mm	280-618
15 mm	280-619
20 mm	280-638
25 mm	280-639

4-conductor terminal blocks for module width



10 mm	280-608
15 mm	280-609
20 mm	280-628
25 mm	280-629
35 mm	280-636