






3P AC INLET RECEPTACLE




MODEL NO	NEW	2AC-016	SERIES
	OLD	AC-016	SERIES

ORDERING CODE: 2AC-016 40





PANEL CUT OUT DIM.
(THICKNESS SEE TABLE)



Insulation Resistance: 100MΩ Min.
Dielectric Strength: 2000V Min.
Operating Temperature: 65°C
15A 250V: UL,CSA.
10A 250V: VDE,SEMKO,NEMKO,DEMKO,FIMKO.

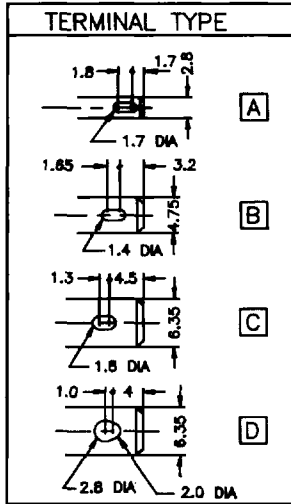


PART NUMBER	PANEL THICKNESS	DIM "A"
30	3.0	3.33
25	2.5	2.79
23	2.3	2.44
20	2.0	2.23
18	1.8	1.95
15	1.5	1.7
13	1.3	1.4
10	1.0	1.14
08	0.8	0.99

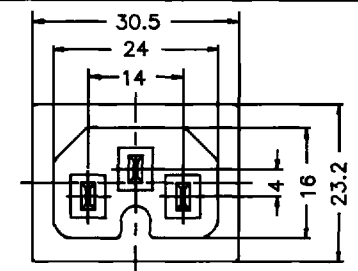


MODEL NO	NEW	2AC-017	SERIES
	OLD	AC-017	SERIES

ORDERING CODE: 2AC-017 40

PANEL CUT OUT DIM.
(THICKNESS SEE TABLE)



Insulation Resistance: 100MΩ Min.
Dielectric Strength: 2000V Min.
Operating Temperature: 120°C
15A 250V: UL,CSA.
10A 250V: VDE,SEMKO,NEMKO,DEMKO,FIMKO.

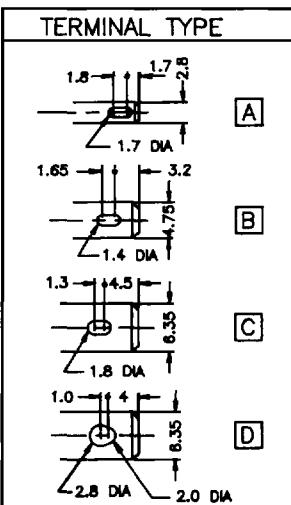

PART NUMBER	PANEL THICKNESS	DIM "A"
30	3.0	3.33
25	2.5	2.79
23	2.3	2.44
20	2.0	2.23
18	1.8	1.95
15	1.5	1.7
13	1.3	1.4
10	1.0	1.14
08	0.8	0.99