
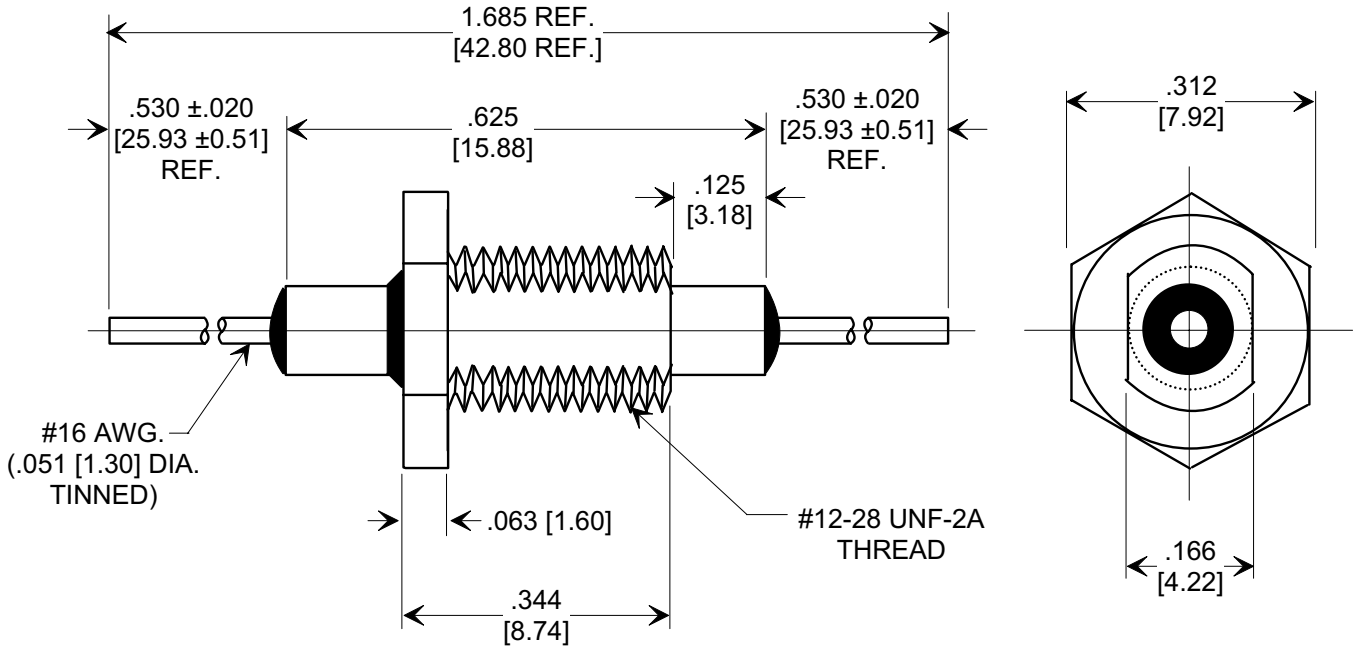


MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.



MAXIMUM TIGHTENING TORQUE - 8 IN. LBS.

NOTE:
 1. SUPPLIED WITH HEX NUT
 AND LOCK WASHER.

TUSONIX PART NUMBER	321-022-X5E0-102M
CAP. VALUE	1000 pF
CAP. TOL.	± 20 %
TEMP. COEFFICIENT	X5E
VOLT. RATING	500 VDC
OPERATING TEMP. RANGE	-55 TO +85°C

X-2015 Rev-0 REVISION RECORD Original Release C.O. 3934 RDN TO COMP FMT. S.M. 06-27-00 20000627-2-01	0	--TOLERANCES-- Unless Otherwise Specified DECIMAL ± .015 ANGLES ±	Title FEED-THRU CERAMIC CAPACITOR	
	1		Drawn S.M. 06-27-00 Scale 4 X	
	Approved T.C 06-27-00			
	TUSONIX TUCSON, ARIZONA		A	321-022-X5E0-102M