

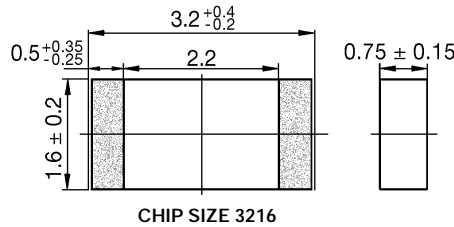


Chip Fuse
Fast-Acting

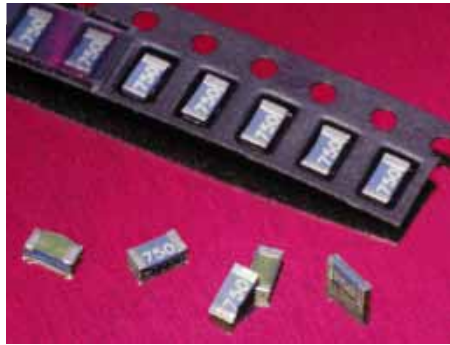


UL 248-14, 63V

- **FaxBack Document # 321:**
- **Approvals:**
cULus Recognized: File No. E 67006
- **Packaging:**
00: Blister Tape (3000 pcs. per Reel)
- **Soldering Conditions:**
235°C, 2 sec. (Wave and Reflow)
- **Soldering Heat Resistance:**
260°C, 10 sec. (IEC 68-2-58)
- **Recommended Solder Glue:**
Grace Amicon 125 F
- **Material:**
Housing:¹ Ceramic substrate,
Glass encapsulated
Terminals: Tinned, metallized
- **Vibration Resistance:**
24 cycles each 15 min. (EN 60068-6)
10 - 60Hz at 0.75mm amplitude
60 - 2000Hz at 10g acceleration

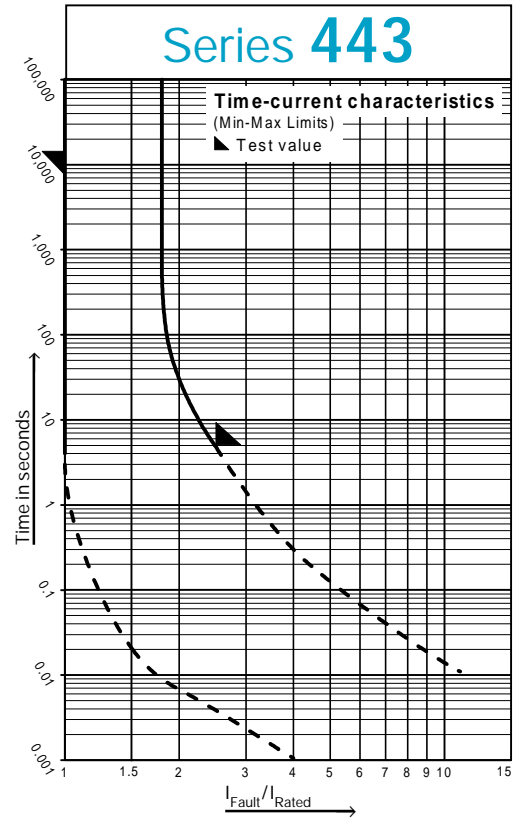


Note: Contact WICKMANN for individual I-t curves

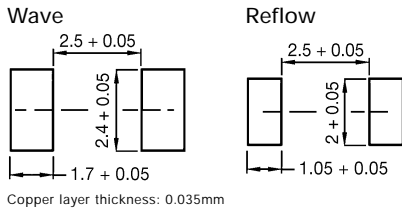

• **Solder Pad Layout:**

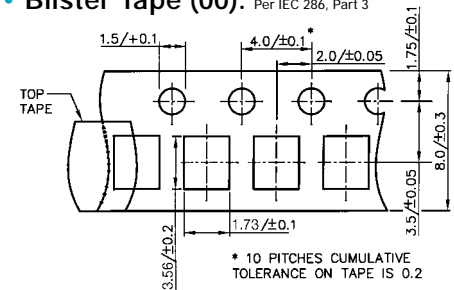

• **Blister Tape (00):** Per IEC 286, Part 3





• **Limits for Pre-arcing Time**

Rated Current	100% 	250% 
750mA ... 2.00A	> 4h	< 5s



Permissible continuous operating current is ≤ 70% at ambient temperature of 23°C (73.4°F).

Rated Current ² / Rated Voltage	Amp Code	Breaking Capacity	Voltage Drop (max) 100% x I _{Rated} (mV) 	Melting Integral (max) 1000% x I _{Rated} (A ² s) 	Approvals
750mA / 63V 1.00A / • 1.50A / • 2.00A / •	0750 1100 1150 1200	50A at 63VAC/DC (AC) cos φ = 1.0	600 530 450 440	0.03 0.05 0.2 0.4	cURus • • • •

¹ solder fuse with marked side facing up and avoid conducting paths below the fuse
² for lower amp ratings, see Series 441

• **Order Information**

Qty.	Order-Number	Series	Amp Code	Packaging
		4 4 3		0 0 0