


507/508
Series:

NEW PRODUCT

- Voltage range up to 110 VAC
- Nickel plated brass
- MTBF 90,000hrs
- MLQ 10
- Sunlight readable

Ø 8.1 mm Mounting (Sunlight Readable LEDs)

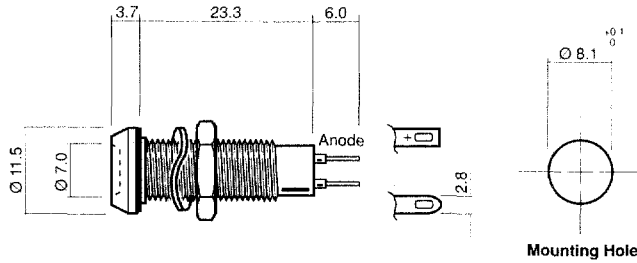

SCALE 1:1
DIMENSIONS IN MM (TYPICAL)

Ordering information and technical characteristics (Ta = 25°C)

Order code	Colour	Lens	Voltage DC Vopr	Current DC Iopr	Luminous Intensity lv @ Iopr	Wave Length λp	Viewing Angle (Inclusive)	Operating Temp Topr	Storage Temp Tstg
507 - 502 - 04	Red		1.9	20	250	660			
507 - 521 - 04	Yellow		1.9	20	2500	590			
507 - 512 - 04	Green		2.2	20	100	563			
507 - 930 - 04	Blue		3.6	20	1000	450			
507 - 502 - 20	Red		5/6	15/20	188/250	660			
507 - 521 - 20	Yellow		5/6	15/20	1880/2500	590			
507 - 512 - 20	Green		5/6	15/20	75/100	563			
507 - 930 - 20	Blue		5/6	15/20	750/1000	450			
507 - 502 - 21	Red		12	20	250	660			
507 - 521 - 21	Yellow		12	20	2500	590			
507 - 512 - 21	Green	Coloured Diffused	12	20	100	563			
507 - 930 - 21	Blue		12	20	1000	450			
507 - 502 - 22	Red		24	20	250	660			
507 - 521 - 22	Yellow		24	20	2500	590			
507 - 512 - 22	Green		24	20	100	563			
507 - 930 - 22	Blue		24	20	1000	450			
507 - 502 - 75	Red		110 VAC	6.0	75	660			
507 - 521 - 75	Yellow		110 VAC	6.0	750	590			
507 - 512 - 75	Green		110 VAC	6.0	30	563			
507 - 930 - 75	Blue		110 VAC	6.0	300	450		-20 to -30	
508 - 502 - 04	Red		1.9	20	250	660	120	to +60	to +85
508 - 521 - 04	Yellow		1.9	20	2500	590			
508 - 512 - 04	Green		2.2	20	100	563			
508 - 930 - 04	Blue		3.6	20	1000	450			
508 - 502 - 20	Red		5/6	15/20	188/250	660			
508 - 521 - 20	Yellow		5/6	15/20	1880/2500	590			
508 - 512 - 20	Green		5/6	15/20	75/100	563			
508 - 930 - 20	Blue		5/6	15/20	750/1000	450			
508 - 502 - 21	Red		12	20	250	660			
508 - 521 - 21	Yellow		12	20	2500	590			
508 - 512 - 21	Green	Smoked	12	20	100	563			
508 - 930 - 21	Blue		12	20	1000	450			
508 - 502 - 22	Red		24	20	250	660			
508 - 521 - 22	Yellow		24	20	2500	590			
508 - 512 - 22	Green		24	20	100	563			
508 - 930 - 22	Blue		24	20	1000	450			
508 - 502 - 75	Red		110 VAC	6.0	75	660			
508 - 521 - 75	Yellow		110 VAC	6.0	750	590			
508 - 512 - 75	Green		110 VAC	6.0	30	563			
508 - 930 - 75	Blue		110 VAC	6.0	300	450			
			V	mA	mcd	nm	deg	°C	°C