

.438" PCB Barrier Terminal Strip

Description


The series 73, PCB barrier terminal strip is one of our most versatile product series offering a broad range of screw, terminal and hardware options.

The terminal block can be configured for maximum 14, 12 or 10 AWG wires and up to 30 Amps.

Made in the USA, all Beau terminal blocks embody the highest quality standards in the industry-using the finest materials and world class manufacturing processes. They meet or exceed all applicable industry standards.

Features

- **Robust and durable**, 73 series screw terminals are ultrasonically welded into the thermoplastic insulator, eliminating terminal twisting and associated solder joint failure.
- **Molded to exact length**, with no ugly saw cuts, Beau terminal strips make your products look more professional. The terminal block is the one component that your customer is sure to see.
- **Wide variety of options**. Our broad range of screw, terminal, hardware and mounting options allows us to save you assembly costs and improve interconnect performance.

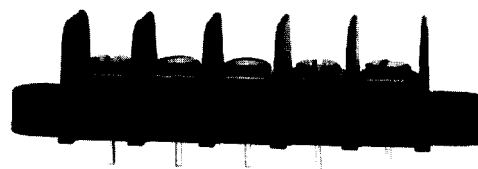

PRODUCT RATINGS

#6-32 BINDING HEAD SCREW

UL	Class B	15 Amps @ 300 V	14 AWG
	Class C	15 Amps @ 300 V	14 AWG
CSA	Class B	20 Amps @ 300 V	14 AWG
	Class C	20 Amps @ 300 V	14 AWG

#6-32 WIRE CLAMP SCREW

UL	Class B	20 Amps @ 300 V	12 AWG
	Class C	20 Amps @ 300 V	12 AWG
CSA	Class B	20 Amps @ 300 V	12 AWG
	Class C	20 Amps @ 300 V	12 AWG

#8-32 WIRE CLAMP SCREW

UL	Class B	30 Amps @ 300 V	10 AWG
	Class C	30 Amps @ 300 V	10 AWG
CSA	Class B	30 Amps @ 300 V	10 AWG
	Class C	30 Amps @ 300 V	10 AWG

NOTE: 3.5M and 4.0M screws carry #6-32 and #8-32 screw ratings respectively.

SAFETY AGENCIES

UL	File No. E48521 Guide No. XCFR2
CSA	File No. 025562

TECHNICAL SPECIFICATIONS

ELECTRICAL

DWV	10500 VDC
IR	>5000 Megohms

MECHANICAL

Tightening torque	12 in.-lbs.
Maximum torque	13 in.-lbs.
Wire strip length	5/16"
Wire range	10 to 24 AWG

ENVIRONMENTAL

Continuous Use Temp	
RTI electrical	110°C
RTI mechanical w/o impact	110°C

MATERIALS

Insulator	Thermoplastic, UL94V-0, black
Terminal	Brass, tin-lead plate
Screws	#6-32, phillips/slotted, steel, zinc chromate plate

OPTIONS

-45	Slotted screw
-47	Screws up, wire ready
-45-56	Stainless steel screws, slotted
-49	Brass, phillips/slotted screw
-50	Clamp washer, phillips/slotted screw
-58	No screws, barrier only
-59	Screws supplied unassembled
-A	Oversize screws, #8-32 slotted
-C	No mounting ends
-F	Rap-attach mounts
-M	3.5 M screw, slotted
-P	.040" standoff pads
-V	130°C insulator


HOW TO ORDER



SERIES	TERMINAL STYLE	NO. OF POLES	OPTIONS
1 2 3	5 6 7	2 to 30	(Dash #s above and opposite page)
8 9			

*Consult factory for combinations of screw options.

Molex Industrial Division
New England Operations
Gilford, NH 03246-6600
Phone (603) 524-5101
Fax (603) 524-1627
Internet www.beauint.com

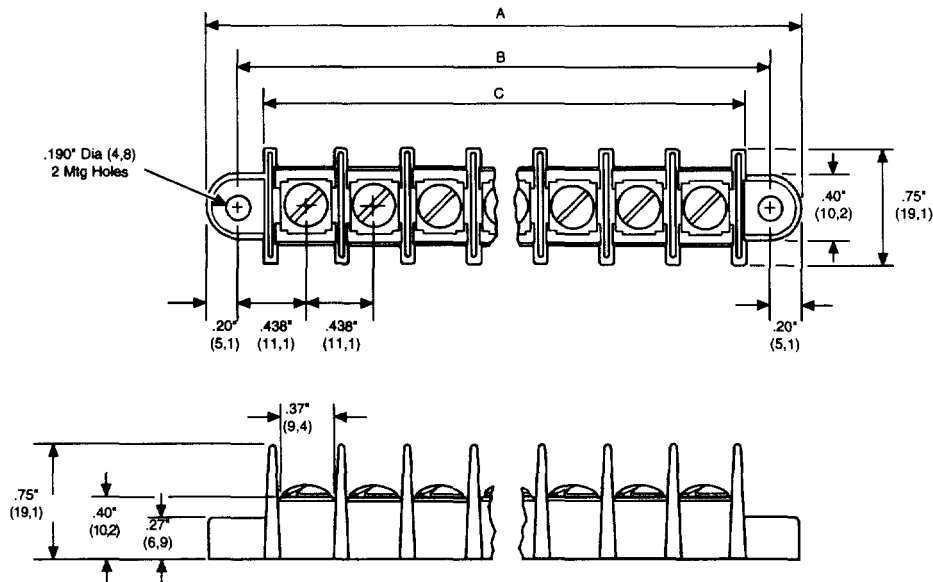


No. of Circuits	A		B		C	
	in.	mm	in.	mm	in.	mm
2	1.71	43,5	1.31	33,4	.97	24,6
3	2.15	54,6	1.75	44,5	1.40	35,7
4	2.59	65,7	2.19	55,6	1.84	46,8
5	3.03	76,8	2.63	66,7	2.28	57,9
6	3.46	88,0	3.06	77,8	2.72	69,0
7	3.90	99,1	3.50	88,9	3.15	80,1
8	4.34	110	3.94	100	3.59	91,2
9	4.78	121	4.38	111	4.03	102
10	5.21	132	4.81	122	4.47	113
11	5.65	144	5.25	133	4.90	125
12	6.09	155	5.69	144	5.34	136
13	6.53	166	6.13	156	5.78	147
14	6.96	177	6.56	167	6.22	158
15	7.40	188	7.00	178	6.65	169
16	7.84	199	7.44	189	7.09	180
17	8.28	210	7.88	200	7.53	191
18	8.71	221	8.31	211	7.97	202
19	9.15	232	8.75	222	8.40	213
20	9.59	244	9.19	233	8.84	225
21	10.03	255	9.63	244	9.28	236
22	10.46	266	10.06	256	9.72	247
23	10.90	277	10.50	267	10.15	258
24	11.34	288	10.94	278	10.59	269
25	11.78	299	11.38	289	11.03	280
26	12.22	310	11.81	300	11.47	291
27	12.65	321	12.25	311	11.90	302
28	13.09	332	12.69	322	12.34	313
29	13.53	344	13.13	333	12.78	325
30	13.96	355	13.56	345	13.22	336

TERMINAL STYLES


STYLE 1
No PC
Terminal




STYLE 2
Insulated
Solder
Turret




STYLE 3
Insulated
PC




STYLE 5
PC




STYLE 6
Solder
Turret



STYLE 7
Wire Wrap



STYLE 8
Right
Angle PC



STYLE 9
Insulated
Quick
Connect

