



ASH-32 Series Pitch 11mm

Specifications



BARRIER MATERIAL: PHENOLIC, BLACK
 TERMINALS: TIN PLATED BRASS
 SCREWS: NICKEL PLATED STEEL
 WIRE RANGE AWG: 12-18 STR.
 RATING: 20 AMPERES, 300 VAC
 INSULATION WITHSTANDS VOLTAGE AC 2000
 INSULATION RESISTANCE 500MΩ OR MORE AT DC 500V

MOUNTING END & BARRIER
 END ARE BOTH AVAILABLE



ASH-320

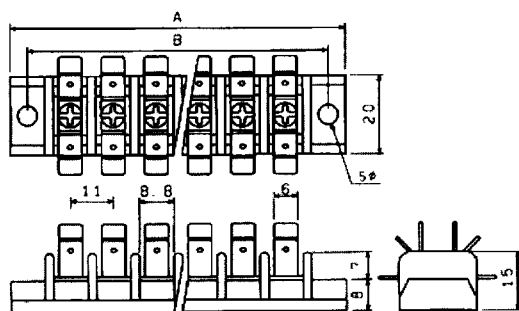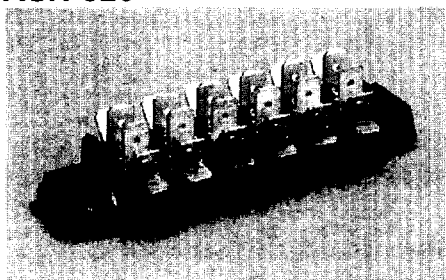



ASH-321

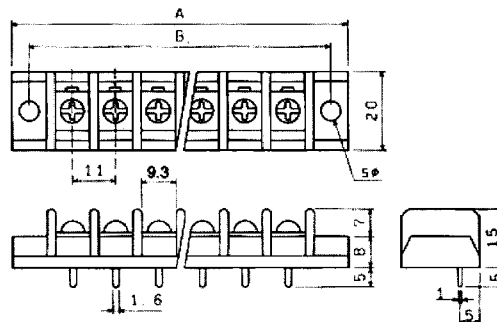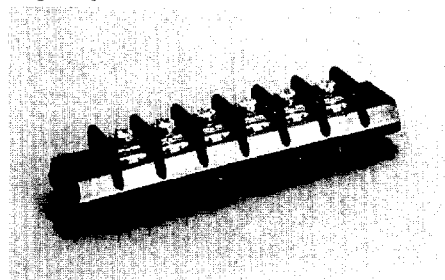

ASH-322

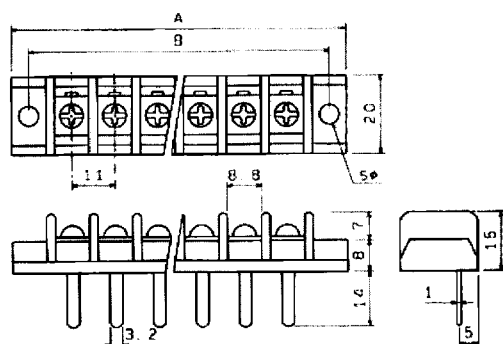
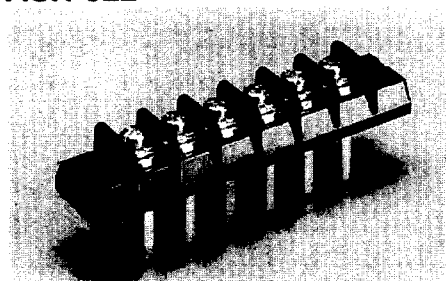


ASH-323

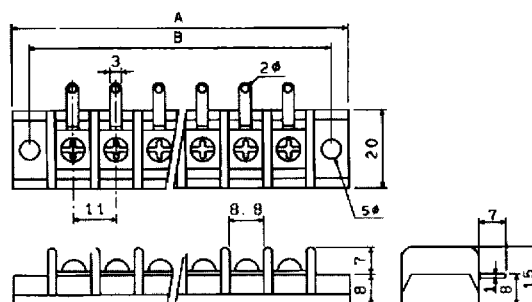
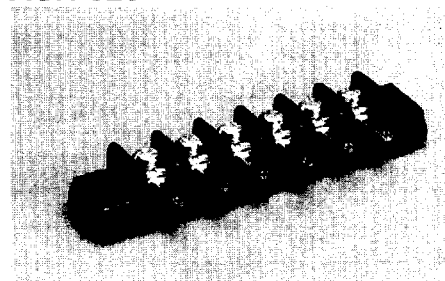


ASH-32 Series Continued....

ASH-324

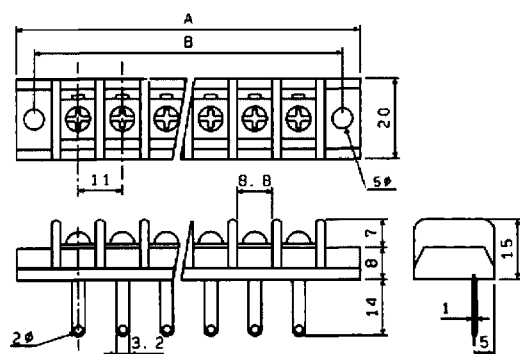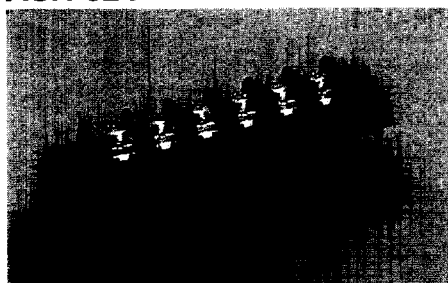

ASH-325

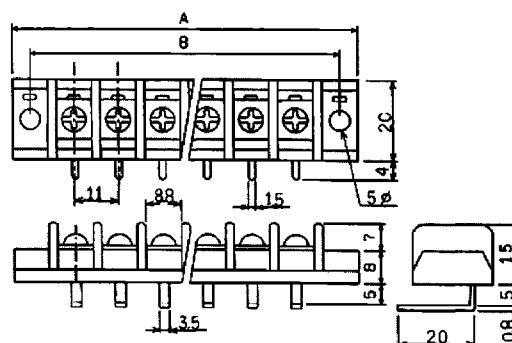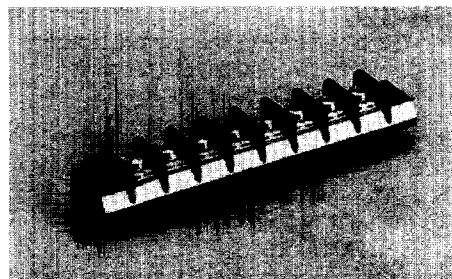

DIMENSION: $\pm 0.8\text{mm}$

Pole	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
A	44	55	66	77	88	99	110	121	132	143	154	165	176	187	198
B	33	44	55	66	77	88	99	111	122	133	144	155	166	177	188

Pole	17	18	19	20	21	22	23	24
A	209	220	231	242	253	264	275	286
B	199	210	221	232	243	254	265	276