

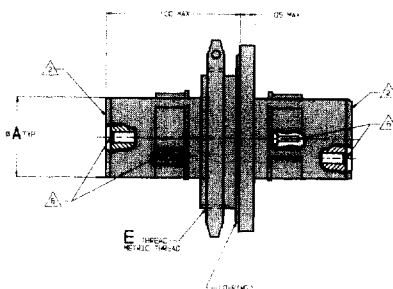


BULKHEAD FEED THRU - SERIES IV

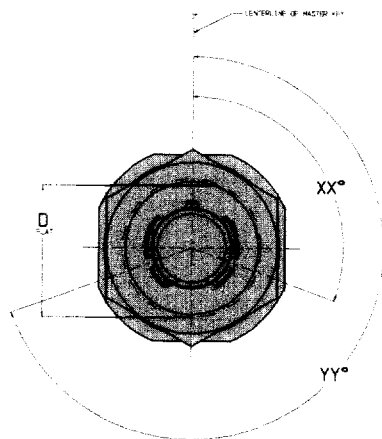

G & H PART NUMBER DEVELOPMENT

BREECH-LOK® **BL 05 F 15 - 35 P N**
MIL-C-38999, Series IV Configuration

SHELL TYPE: _____
05 = Bulk Head Feed Thru

CLASS _____

SHELL SIZE _____
(SEE TABLE II)

INSERT ARRANGEMENT _____
(SEE PAGES 4-6)

CONTACT STYLE _____
P = Pin, Pin
S = Socket, Socket
A = Socket, Pin
B = Pin, Socket

SHELL POLARIZATION _____
(SEE TABLE I)

**TABLE I
POLARIZATION CHART**

KEY POSITION	XX°	YY°
N	110°	250°
A	100°	260°
B	90°	270°
C	80°	280°
D	70°	290°
K	120°	255°

CONSULT FACTORY FOR ADDITIONAL
POLARIZATION POSITIONS

TABLE II

SHELL SIZE	øA MAX	B MAX	øC MAX	D MAX	E THREAD
9	.381	1.073	1.195	.651	M22x1.0-6g-0.1R
11	.509	1.394	1.520	.942	M25x1.0-6g-0.1R
13	.634	1.520	1.642	1.066	M28x1.0-6g-0.1R
15	.759	1.642	1.768	1.191	M31x1.0-6g-0.1R
17	.885	1.799	1.957	1.321	M34x1.0-6g-0.1R
19	1.009	1.909	2.035	1.441	M38x1.0-6g-0.1R
21	1.134	2.035	2.157	1.566	M41x1.0-6g-0.1R
23	1.259	2.157	2.283	1.691	M44x1.0-6g-0.1R
25	1.384	2.283	2.409	1.815	M47x1.0-6g-0.1R